



SCHILL

connecting professionals



Catalog Handcraft

2022 / 4

Follow us on



@schillkabeltrommeln



schilltrommeln



Schill Kabeltrommeln



schill_gmbh



@schill_gmbh

The right cable drum for professionals.

Any work involving cables, lines or hoses requires cable drums. Whether it is at home, in trade, in industry, at TV or radio stations or at events, Schill offers impressive, high-performance products for every application.

Schill GmbH & Co. KG is based in Baden-Württemberg and has been producing cable drums and reels in the family tradition since 1948. The forward-looking medium-sized enterprise produces both individual solutions and standard systems: stable plastic cable boxes for domestic use, robust cable drums made from special rubber or sheet steel for construction as well as motorised built-in cable drums for outside broadcast vans; Schill's product range meets every need – right up to pivoting spring-loaded or hose reels, as well as solutions for charging electric vehicles.

Schill provides innovative systems for customers and partners from the fields of audio/video, broadcast, mobility, trade and industry. Improvement, development and regular inspections of the cable drums and reels keep quality at a consistently high level while always ensuring compliance with current international standards such as DIN EN ISO 9001:2015

Furthermore, many Schill cable drums meet the requirements of the German Social Accident Insurance DGUV; DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2).

The headquarters and administration of Schill GmbH & Co. KG are situated in Fellbach near Stuttgart. Since 1968, the production facilities have been in Laichingen on the Swabian Jura. Today, the company is run by the third generation by Ingo Schill and has more than 60 employees who boast many years of experience and competence.

Over the years, Schill has become established as a major name on the international global market.



Administration


Schill GmbH & Co. KG
Bruckstraße 44
D-70734 Fellbach
Tel.: +49 (0)711 578807-0
Fax: +49 (0)711 578807-44



Production

Schill GmbH & Co. KG
Hirschstraße 81
D-89150 Laichingen
Tel.: +49 (0)7333 9648-0
Fax: +49 (0)7333 9648-44

The company with tradition

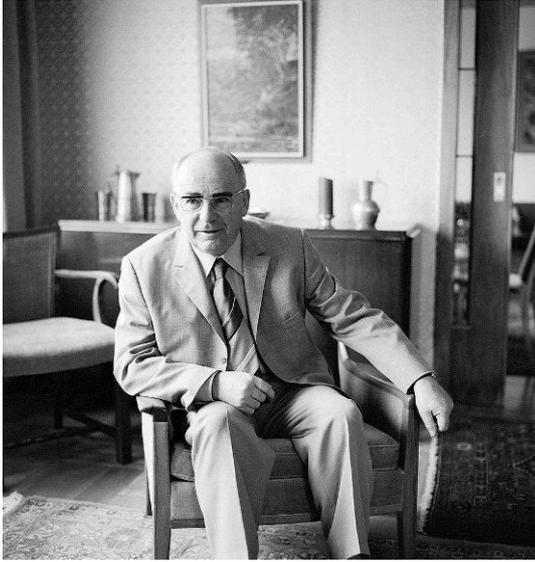


The company founder: Otto Schill

As a company with a strong tradition which has been characterised by quality and solid craftsmanship for over half a century, Schill produces innovative products with meticulous care and state-of-the-art production technology. For over 70 years, the company's mission has been to provide the best for its customers, every time. Innovations in applicability and technology set new standards again and again and ensure that the products are constantly being redeveloped and improved. In this way, a revolutionary idea from company founder Otto Schill, combined with vision, love and passion, paved the way for a truly indispensable product.


1940

By manufacturing accessories for broadcasting such as special cable drums, director's stands and microphone tripods, the engineer Otto Schill writes the first chapter of this traditional company's impressive success story.

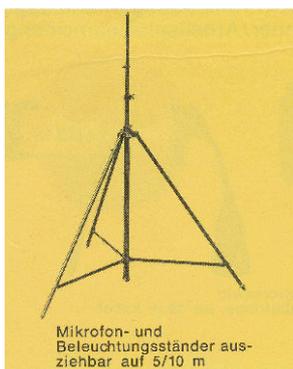

1950

The company expands and grows continuously thanks to extremely innovative inventions such as the portable cable drum made from sheet steel..

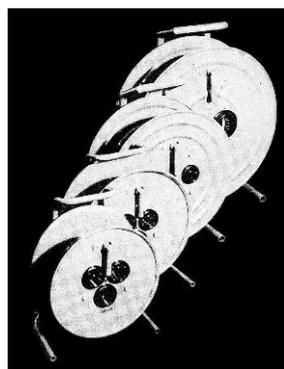

1960

A cable box with ten metres of cable and two sockets facilitates the increasing use of electrical devices in the home. In 1967, the company presents the first spring-loaded drum.



1970

Otto Schill invents the first fully insulated plastic cable drum. The new light box joins the cable box range. Schill trained the first tool maker at their site Laichingen in the year 1970.



The company with tradition

Third generation

The brothers Ingo and Gerrit Schill jointly managed the fortunes of the Schill company for almost two decades. At the end of 2018, Gerrit Schill ended his position as managing director. Ingo Schill takes over the sole management in 2019.

Today, the company has more than 60 employees and has long been established as a major name on the international global market.



The managing director Ingo Schill

1980

The company launches the largest plastic cable drum produced to date on the market. Thanks to its large core diameter, it can be fitted with all kinds of socket combinations, residual current devices and automatic fuses.



1990

Following the death of senior partner Otto Schill, his son continues his life's work by taking on the management of the family company. Immo Schill decides to introduce a quality management system.




2000

Immo Schill's sons Ingo and Gerrit join Schill GmbH & Co. KG as further managing directors and are soon made partners. The company's client base expands continuously in the fields of broadcasting, TV and video and overseas exports increase. At the end of 2010, Immo Schill retires from the company management. In 2008 Schill becomes a training company for commercial professions at their office in Fellbach.



2010

At the end of 2010, Immo Schill retires from the company management. In 2017 Schill launches the first completely waterproof cable reel GT 310.WS3-IP67. One year later, various FT reels with LAN cable are introduced. At the end of 2018 Gerrit Schill ends his activity as managing director and Ingo Schill takes over the sole management.

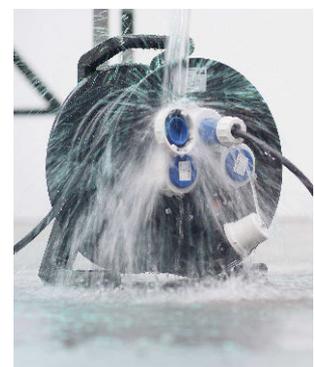

Structure of the article description:

Example: Trade

GT 310.MD4L.40PU315



1 2 3 4 5 6 7 8

1 Drum type

Special rubber cable drum

2 Approx. drum diameter in mm

310

3 Socket description

4 machine sockets 2-pole+E, 16A, 230V

4 Other description

Signal lamp

5 Cable length in m

40

6 Cable type

H07BQ-F

7 Number of cores

3_core

8 Cable cross section in mm

1,5

Example: Industry

FT 260.0308.S316



1 2 3 4 5

1 Drum type

Cable reel with spring balancer

2 Approx. housing diameter in mm

260

3 Numbers of slip ring poles

3 pole slip ring-poliger Schleifring

4 Cable length in m

8

5 Plug connection

3-pole 16A plug connection

Example: Audio / Video

GT 310.S0



1 2 3

1 Drum type

Special rubber cable drum

2 Approx. drum diameter in mm

310

3 Fitting

Without sockets / with blank cover for self-tooling

Example: Broadcast

PL 450.250.300



1 2 3 4

1 Drum type

Camera cable drum

2 Approx. disc diameter in mm

450

3 Approx. drum diameter in mm

250

4 Core width in mm

300

Description

Cable descriptions

KK	H05VV-F / Plastic cable / suitable for indoor use
KG	H05RR-F / Rubber cable / suitable for indoor use
KS	H07RN-F / Heavy rubber hose line / suitable for outdoor use
PU	H07BQ-F / PUR-Line H07BQ-F (standard cable colour yellow, orange possible; cable printing possible / suitable for outdoor use)

Drum type

ALD	Cable winch drum made of polycarbonate	Practical Line
ALM	Motorized cable drum made of polycarbonate	Practical Line
BA	Spring balancer for weight compensation	Dispensor Line
EFT	Installation cable reel with spring balancer made of plastic	Flex Line
EST	Installation hose reel with spring balancer made of plastic	Air Flex Line
FT	Cable reel with spring balancer made of plastic or sheet steel	Flex Line
FTE	Cable/Spring balancer reel for grounding purposes made of plastic	Flex Line
GT	Special rubber cable drum	Professional Line
HT	Sheet steel cable drum	Classic Line
IT	Plastic cable drum	Base Line
IPL	Motorized drum system made of polycarbonate	Individual Line
KB	Cable box made of plastic	Home Line
MPL	Motorized drum system made of polycarbonate	Camera Line
PL	Camera cable drum made of polycarbonate or aluminium	Camera Line
PLG	Cable winch drum made of polycarbonate	Camera Line
SK	Stage cable drum made of sheet steel	Stage Line
SL	Stage cable drum made of polycarbonate	Stage Line
ST	Hose reel with spring balancer made of plastic or sheet steel	Air Flex Line
VL	Extension cable	Extension Line

Socket description

B	Belgian / French Version
BS	Sockets British Standard
C316	CEE 3x16A / 2-pole+E, 16A, 230V
C516	CEE 5x16A / 4-pole+E, 16A, 400V
C532	CEE 5x32A / 4-pole+E, 32A, 400V
CW	CEE-sockets pressurised water resistant
MD	Machine socket with hinged cover / 2-pole+E, 16A, 230V
MD4L	Machine socket with hinged cover and signal lamp (L) / 2-pole+E, 16A, 230V
MD4K	Machine socket with child-proof lock (K) / 2-pole+E, 16A, 230V
S	Open earthed socket / 2-pole+E, 16A, 230V / indoor use only
TS	Open earthed socket with drip water cover / 2-pole+E, 16A, 230V
WS	Socket pressurised water resistant / 2-pole+E, 16A, 230V
Z-plug connection	Cable reels plug connections

Description unloaded drums

Open	Without sockets / without KOMB-cover
SO	Without sockets / with blind cover for self-tooling / partly with closed front panel
RM	Without sockets / with auxiliary spool
MFK	Without sockets / with latching door
RMFK	Without sockets / with latching door and auxiliary spool
MS	Without sockets / with slip ring

Other description

AD KOMB	Socket insert without sockets
FI	With residual current device
FST	Travelling column unit
KOMB	Combination cover with sockets
LED	With integrated LED
PRCD-S	With personal protection when drawing current from on-site sockets
Travel Unit	Transport travel unit
TW	Transport trolley for SK's

Note : All technical information, descriptions and illustrations contained in this catalog may be subject to modifications or errors.

Long-time spare parts service

You need a spare part? At Schill you can obtain almost all components of the products as spare parts. The sales team is looking forward to your inquiry at sales@schill.de.

Special construction

Your cable drum is not listed? For special construction please contact the sales department via email at sales@schill.de.

Special colours

All cable drums are available in other colours at an additional charge. Please contact the sales department for more information at sales@schill.de.

Explanation of the symbols and abbreviated designations for SCHILL model series

Cable qualities

H05VV-F 3G1,5



1 2 3 4 5 6 7 8

1 Purpose

H = harmonised cable

2 Nominal voltage V

05 = 300/500 V

07 = 450/750 V

3 Insulation

V = PVC

R = natural or synthetic rubber

B = synthetic rubber

4 Cable sheath

V = PVC

R = natural or synthetic rubber

N = neoprene rubber

Q = polyurethane

5 Cable type

F = fine wires for flexible cables

6 Number of wires

7 Protective conductor

G = with green/yellow wire

8 Cable cross section

Schill cable designations

KK = H05VV-F

KG = H05RR-F

KS = H07RN-F

PU = H07BQ-F

(For PU cable standard cable colour yellow, cable printing possible)

Cable types

H05VV-F: Standard version for normal load. Suitable for indoor applications.

H05RR-F: Suitable for connecting devices where the cable is subject to light mechanical loads. Suitable for indoor applications and short-term outdoor use.

H07RN-F: Suitable for connecting devices where the cable is subject to moderate mechanical loads, e.g. for devices in commercial and agricultural work shops. Suitable for dry, damp or wet rooms and for constant use outdoors.

H07BQ-F: Suitable for connecting devices where the cable is subject to moderate mechanical loads and for connecting commercial or agricultural devices, for example. Suitable for constant use outdoors.

Degrees of protection

Code digit 1 - protection against foreign bodies

IP0X	IP1X	IP2X	IP3X	IP4X	IP5X	IP6X
Not protected	Protected against foreign bodies > 50 mm	Protected against foreign bodies >12,5 mm	Protected against foreign bodies >2,5mm	Protected against foreign bodies >1mm	Protected against dust	Dust-proof
						

Degrees of protection

Code digit 2 - protection against water

IPX0	IPX1	IPX2	IPX3	IPX4	IPX5	IPX6	IPX7	IPX8
Not protected	Protected against vertically dripping water	Protected against dripping water when tilted	Protected against spraying water	Protected against splashing water	Protected against water jets	Protected against powerful water jets	Protected against intermittent submersion*	Protected against continuous submersion
								

*For GT 310.WS3-IP67: Up to 1 meter water depth and for a maximum of 30 minutes (checked by TÜV-Süd)

Explanation of symbols



Complies with DGUV info 203-006 and 203-005
Formerly BGI 608 and 600



Earthed socket
Open



With thermal protection
Thermal protection in accordance with VDE



Machine socket
with self-closing hinged cover



With RCD
Residual current device



CEE socket 3x16A
with self-closing hinged cover



Only to be connected
by a qualified electrician



CEE socket 5x16A
with self-closing hinged cover



CEE socket 5x32A
with self-closing hinged cover

Protection classes



I: Protected by protective conductor connection, all conductive parts are connected to the earth potential.



II: Protective insulation, reinforced or double insulation of the mains supply circuit.

certificate
no. **ET 21056**
dated 22.10.2021

 **DGUV Test**
Prüf- und Zertifizierungsstelle
Elektrotechnik
Fachbereich Energie Textil
Elektro Medientechnologie

Translation In any case, the German original shall prevail.

GS Certificate

Name and address of the holder of the certificate: (customer): **Schill GmbH & Co. KG
Hirschstrasse 81
89150 Laichingen**

Name and address of the Manufacturer: Schill GmbH & Co. KG
Hirschstrasse 81
89150 Laichingen

Product designation: Cable reels

Type: GT 310... (Variants see Annex)
IT 266... (Variants see Annex)

Intended purpose: For use on construction and assembly sites

Testing based on: GS-ET-35 Principles of testing and certification for cable reels for construction and assembly sites 2019-02

Remarks:

The type tested meets the requirements specified in article 20 para. 3 of the German Product Safety Act. The holder of the certificate is entitled to affix the GS mark shown overleaf to the products complying with the type tested. At that, the holder of the certificate shall observe the conditions specified overleaf. The present certificate including the right to affix the GS is valid until: **30.06.2026**

Further provisions concerning the validity, the extension of the validity and other conditions are laid down in the Rules of Procedure for Testing and Certification.

Az: NP.010.07/19-257-VT01/Wld/W


Dipl.-Ing. Malte Gombka
Manager of the Certification Body



Deutsche Gesetzliche Unfallversicherung (DGUV) e. V.
Spitzenverband der gewerblichen Berufsgenossenschaften
und der Unfallversicherungsträger der öffentlichen Hand
Verkehrsregister-Nr. VR 751 B, Amtsgericht Charlottenburg

DGUV Test Prüf- und Zertifizierungsstelle Elektrotechnik
Fachbereich Energie Textil Elektro Medientechnologie
Gustav-Heinemann-Ufer 130 • 50958 Köln • Deutschland
Telefon +49 (0)221 3778-6301 • Telefax +49 (0)221 3776-6322

PZDME
07.21



Anlage zum
Attachment to

GS-Zertifikat:
GS-Certificate

ET 21056

Bescheinigungsinhaber:
Holder of certificate

Schill GmbH & Co. KG
Hirschstrasse 81
89150 Laichingen

Produktbezeichnung:
Product designation

Leitungsroller

Typ:
Types

GT 310...
IT 266...

Nachfolgend aufgeführte Produkte sind Bestandteil des Zertifikats:
The certificates contains the following types of cable reels

Artikel Nr. <i>Article number</i>	Typbezeichnung <i>Type designation</i>	Anschlussleitung <i>cable</i>	Länge <i>length</i> (m)	Bestückung
270 42 422 000	GT 310.MD4.25KS315	H07RN-F 3G1,5	25	4 Steckdosen / sockets
270 42 424 000	GT 310.MD4.40KS315	H07RN-F 3G1,5	40	4 Steckdosen / sockets
270 42 425 000	GT 310.MD4.50KS315	H07RN-F 3G1,5	50	4 Steckdosen / sockets
270 42 432 000	GT 310.MD4.25KS325	H07RN-F 3G2,5	25	4 Steckdosen / sockets
270 42 433 000	GT 310.MD4.33KS325	H07RN-F 3G2,5	33	4 Steckdosen / sockets
270 42 522 000	GT 310.MD4.25PU315	H07BQ-F 3G1,5	25	4 Steckdosen / sockets
270 42 524 000	GT 310.MD4.40PU315	H07BQ-F 3G1,5	40	4 Steckdosen / sockets
270 42 525 000	GT 310.MD4.50PU315	H07BQ-F 3G1,5	50	4 Steckdosen / sockets
270 42 526 000	GT 310.MD4.40PU325	H07BQ-F 3G2,5	40	4 Steckdosen / sockets
270 42 532 000	GT 310.MD4.25PU325	H07BQ-F 3G2,5	25	4 Steckdosen / sockets
230 40 422 000	IT 266.MD3.25KS315	H07RN-F 3G1,5	25	3 Steckdosen / sockets
230 40 424 000	IT 266.MD3.40KS315	H07RN-F 3G1,5	40	3 Steckdosen / sockets
230 40 432 000	IT 266.MD3.25KS325	H07RN-F 3G2,5	25	3 Steckdosen / sockets
230 40 522 000	IT 266.MD3.25PU315	H07BQ-F 3G1,5	25	3 Steckdosen / sockets
230 40 532 000	IT 266.MD3.25PU325	H07BQ-F 3G1,5	25	3 Steckdosen / sockets

Das Zertifikat umfasst 15 Produkte / The certificate include 15 variants

Köln, 22.10.2021

Az.: NP.010.07/19-257-VT01/Wld/Wi


Bernd Wieland
Zertifizierer



Wld/Wi

Seite 1 von 1

Voltage: 230V 16A	13
<i>Fittings: Open earthed sockets</i>	13
<i>Fittings: Earthed sockets with protection against dripping water</i>	18
<i>Fittings: Machine sockets with hinged cover</i>	20
<i>Fittings: Machine sockets resistant to pressurised water</i>	35
<i>Fittings: Machine sockets, belg./french version, hinged cover</i>	40
<i>Fittings: CEE sockets</i>	43
<i>Fittings: Residual current device</i>	46
<i>Fittings: Electricity meter</i>	49
<i>Fittings: PRCD-S</i>	50
<i>Fittings: LED</i>	51
<i>Einbauten: USB sockets</i>	52
<i>Fittings: Flat slip ring</i>	53
Voltage: 230V 13A	57
<i>Fittings: Machine sockets British Standard</i>	57
Voltage: 230V 40A	59
<i>Fittings: Flat slip ring</i>	59
Voltage: 400V 16A	61
<i>Fittings: CEE sockets</i>	61
<i>Fittings: CEE sockets resistant to pressurised water</i>	70
<i>Fittings: Residual current device</i>	71
<i>Fittings: Flat slip ring</i>	76
Voltage: 400V 25A	81
<i>Fittings: Brush slip ring</i>	81
Voltage: 400V 32A	83
<i>Fittings: CEE sockets</i>	83
<i>Fittings: Residual current device</i>	90
Accessories	92
<i>Travelling column unit</i>	92
<i>Travelling unit</i>	93
<i>Transport trolley</i>	94
Notes	95
Drum dimensions	96

Voltage:
Fittings:
Material:

230V 16A
Open earthed sockets
Plastic

KB 210.S2



- 2 open earthed sockets, 2-pin + E, 16A, 230V
- thermal protection
- cable colour: white

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
140 02 310 000	KB 210.S2	II	IP20	10	H05VV-F 3G1,0	230V~/16A	1000W	2500W	1.25

KB 225.S2



- 2 open earthed sockets, 2-pin + E, 16A, 230V
- thermal protection
- cable colour: white

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
170 02 320 000	KB 225.S2	II	IP20	20	H05VV-F 3G1,0	230V~/16A	750W	2500W	2.15

Voltage:
Fittings:
Material:

230V 16A
Open earthed sockets
Plastic

KB 0515.S2



- with 2 open earthed sockets, 2-pin + E, 16A, 230V
- with thermal protection
- cable colour: white

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
140 02 315 000	KB 0515.S2	II	IP20	5	H05VV-F 3G1,5	230V~/16A	1200W	3600W	1.10

KB 1015.S4



- 4 open earthed sockets, 2-pin + E, 16A, 230V
- thermal protection
- cable colour: white

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
180 04 315 000	KB 1015.S4	II	IP20	10	H05VV-F 3G1,5	230V~/16A	1200W	3600W	1.94

Voltage:
Fittings:
Material:

230V 16A
Open earthed sockets
Plastic

KB 170.S2



- 2 open earthed sockets, 2-pin + E, 16A, 230V
- thermal protection
- particularly smooth-running
- cable colour: white

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
120 02 310 000	KB 170.S2	II	IP20	10	H05VV-F 3G1,0	230V~/16A	1000W	2500W	1.37

KB 220.S2



- 2 open earthed sockets, 2-pin + E, 16A, 230V
- thermal protection
- particularly smooth-running
- cable colour: white

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
150 02 320 000	KB 220.S2	II	IP20	20	H05VV-F 3G1,0	230V~/16A	750W	2500W	2.50

Voltage:
Fittings:
Material:

230V 16A
Open earthed sockets
Plastic

IT 220.S4



- 4 open earthed sockets, 2-pin + E, 16A, 230V
- thermal protection
- locking brake screw
- carry handle made from galvanised steel tube with insulated handle

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
225 04 122 000	IT 220.S4.25KK315	II	IP20	25	H05VV-F 3G1,5	230V~/16A	1000W	3600W	3.94
225 04 322 000	IT 220.S4.25KG315	II	IP20	25	H05RR-F 3G1,5	230V~/16A	1000W	3600W	4.54

IT 280.S4



- 4 open earthed sockets, 2-pin + E, 16A, 230V
- thermal protection
- locking brake screw
- carry handle made from galvanised steel tube with insulated handle

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
240 04 000 000	IT 280.S4					230V~/16A			1.40
240 04 122 000	IT 280.S4.25KK315	II	IP40	25	H05VV-F 3G1,5	230V~/16A	1500W	3600W	4.30
240 04 125 000	IT 280.S4.50KK315	II	IP40	50	H05VV-F 3G1,5	230V~/16A	1100W	3600W	6.20
240 04 322 000	IT 280.S4.25KG315	II	IP40	25	H05RR-F 3G1,5	230V~/16A	1500W	3600W	4.40
240 04 325 000	IT 280.S4.50KG315	II	IP40	50	H05RR-F 3G1,5	230V~/16A	1100W	3600W	7.90

Voltage:
Fittings:
Material:

230V 16A
Open earthed sockets
Sheet steel

HT 280.S4



- 4 open earthed sockets, 2-pin + E, 16A, 230V
- thermal protection
- locking brake screw
- carry handle made from galvanised steel tube with insulated handle

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
320 04 000 000	HT 280.S4					230V~/16A			2.40
320 04 122 000	HT 280.S4.25KK315	I	IP20	25	H05VV-F 3G1,5	230V~/16A	1500W	3600W	5.30
320 04 125 000	HT 280.S4.50KK315	I	IP20	50	H05VV-F 3G1,5	230V~/16A	1100W	3600W	7.20
320 04 322 000	HT 280.S4.25KG315	I	IP20	25	H05RR-F 3G1,5	230V~/16A	1500W	3600W	5.40
320 04 325 000	HT 280.S4.50KG315	I	IP20	50	H05RR-F 3G1,5	230V~/16A	1100W	3600W	8.00

Voltage:
Fittings:
Material:

230V 16A
Earthed sockets with protection against dripping water
Plastic

IT 280.TS4




- 4 earthed sockets, 2-pin + E, 16A, 230V
- protection against dripping water
- thermal protection
- locking brake screw
- carry handle made from galvanised steel tube with insulated handle

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
240 37 000 000	IT 280.TS4					230V~/16A			1.51
240 37 422 000	IT 280.TS4.25KS315	II	IP41	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	5.21
240 37 424 000	IT 280.TS4.40KS315	II	IP41	40	H07RN-F 3G1,5	230V~/16A	1200W	3600W	7.30
240 37 322 000	IT 280.TS4.25KG315	II	IP41	25	H05RR-F 3G1,5	230V~/16A	1500W	3600W	4.40
240 37 325 000	IT 280.TS4.50KG315	II	IP41	50	H05RR-F 3G1,5	230V~/16A	1100W	3600W	7.60
240 37 425 000	IT 280.TS4.50KS315	II	IP41	50	H07RN-F 3G1,5	230V~/16A	1100W	3600W	8.70

Voltage:
Fittings:
Material:

230V 16A
Earthed sockets with protection against dripping water
Sheet steel

HT 280.TS4




- 4 earthed sockets, 2-pin + E, 16A, 230V
- protection against dripping water
- thermal protection
- locking brake screw
- carry handle made from galvanised steel tube with insulated handle

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
320 37 000 000	HT 280.TS4					230V~/16A			2.50
320 37 422 000	HT 280.TS4.25KS315	I	IP40	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	6.20
320 37 424 000	HT 280.TS4.40KS315	I	IP40	40	H07RN-F 3G1,5	230V~/16A	1200W	3600W	8.30
320 37 425 000	HT 280.TS4.50KS315	I	IP40	50	H07RN-F 3G1,5	230V~/16A	1100W	3600W	9.70
321 37 432 000	HT 280.TS4.25KS325	I	IP40	25	H07RN-F 3G2,5	230V~/16A	2000W	3600W	7.95
320 37 322 000	HT 280.TS4.25KG315	I	IP40	25	H05RR-F 3G1,5	230V~/16A	1500W	3600W	5.50
320 37 325 000	HT 280.TS4.50KG315	I	IP40	50	H05RR-F 3G1,5	230V~/16A	1100W	3600W	8.17

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Plastic



IT 266.MD3



- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- complies with the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
230 40 000 000	IT 266.MD3					230V~/16A			1.48
230 40 122 000	IT 266.MD3.25KK315	II	IP20	25	H05VV-F 3G1,5	230V~/16A	1200W	3220W	3.90
230 40 125 000	IT 266.MD3.50KK315	II	IP20	50	H05VV-F 3G1,5	230V~/16A	1000W	3220W	6.30
230 40 322 000	IT 266.MD3.25KG315	II	IP20	25	H05RR-F 3G1,5	230V~/16A	1200W	3220W	4.50
230 40 325 000	IT 266.MD3.50KG315	II	IP20	50	H05RR-F 3G1,5	230V~/16A	1000W	3220W	7.50
230 40 422 000	IT 266.MD3.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1200W	3220W	5.20
230 40 424 000	IT 266.MD3.40KS315*	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1000W	3220W	7.30
230 40 432 000	IT 266.MD3.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2000W	3220W	6.50
230 40 522 000	IT 266.MD3.25PU315*	II	IP54	25	H07BQ-F 3G1,5	230V~/16A	1200W	3220W	5.20
230 40 532 000	IT 266.MD3.25PU325*	II	IP54	25	H07BQ-F 3G2,5	230V~/16A	2000W	3220W	6.50

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Plastic



IT 266.MD3L



- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- voltage indicator (L)
- complies with the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
234 40 000 000	IT 266.MD3L					230V~/16A			1.32
234 40 122 000	IT 266.MD3L.25KK315	II	IP20	25	H05VV-F 3G1,5	230V~/16A	1200W	3220W	4.40
234 40 125 000	IT 266.MD3L.50KK315	II	IP20	50	H05VV-F 3G1,5	230V~/16A	1000W	3220W	6.70
234 40 322 000	IT 266.MD3L.25KG315	II	IP20	25	H05RR-F 3G1,5	230V~/16A	1200W	3220W	4.50
234 40 325 000	IT 266.MD3L.50KG315	II	IP20	50	H05RR-F 3G1,5	230V~/16A	1000W	3220W	7.00
234 40 422 000	IT 266.MD3L.25KS315	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1200W	3220W	4.55
234 40 424 000	IT 266.MD3L.40KS315*	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1000W	3220W	6.68
234 40 432 000	IT 266.MD3L.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2000W	3220W	6.54

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Special rubber



GT 235.MD3



- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
200 40 000 000	GT 235.MD3					230V~/16A			1.17
200 40 122 000	GT 235.MD3.25KK315	II	IP20	25	H05VV-F 3G1,5	230V~/16A	1300W	3220W	3.58
200 40 322 000	GT 235.MD3.25KG315	II	IP20	25	H05RR-F 3G1,5	230V~/16A	1300W	3220W	4.17
200 40 422 000	GT 235.MD3.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1300W	3220W	4.87
200 40 522 000	GT 235.MD3.25PU315*	II	IP54	25	H07BQ-F 3G1,5	230V~/16A	1400W	3340W	3.97



GT 235.MD3L



- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- voltage indicator (L)

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
204 40 000 000	GT 235.MD3L					230V~/16A			1.17
204 40 322 000	GT 235.MD3L.25KG315	II	IP20	25	H05RR-F 3G1,5	230V~/16A	1300W	3220W	4.17

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Special rubber



GT 310.MD4



- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- **optionally a version with child-proof machine sockets is also available**
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 42 000 000	GT 310.MD4					230V~/16A			1.97
270 42 422 000	GT 310.MD4.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	5.67
270 42 424 000	GT 310.MD4.40KS315*	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1260W	3010W	7.77
270 42 425 000	GT 310.MD4.50KS315*	II	IP54	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	8.87
270 42 432 000	GT 310.MD4.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	6.97
270 42 433 000	GT 310.MD4.33KS325*	II	IP54	33	H07RN-F 3G2,5	230V~/16A	2000W	3600W	8.40
270 42 322 000	GT 310.MD4.25KG315	II	IP20	25	H05RR-F 3G1,5	230V~/16A	1500W	3600W	5.40
270 42 325 000	GT 310.MD4.50KG315	II	IP20	50	H05RR-F 3G1,5	230V~/16A	1250W	3600W	7.37
270 42 522 000	GT 310.MD4.25PU315*	II	IP54	25	H07BQ-F 3G1,5	230V~/16A	1500W	3600W	4.77
270 42 524 000	GT 310.MD4.40PU315*	II	IP54	40	H07BQ-F 3G1,5	230V~/16A	1400W	3340W	6.27
270 42 525 000	GT 310.MD4.50PU315*	II	IP54	50	H07BQ-F 3G1,5	230V~/16A	1250W	3600W	7.27
270 42 532 000	GT 310.MD4.25PU325*	II	IP54	25	H07BQ-F 3G2,5	230V~/16A	2560W	3680W	5.57
270 42 526 000	GT 310.MD4.40PU325*	II	IP54	40	H07BQ-F 3G2,5	230V~/16A	1980W	3680W	7.73

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Special rubber

GT 310.MD4L



- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- voltage indicator (L)
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 44 000 000	GT 310.MD4L					230V~/16A			1.98
270 44 422 000	GT 310.MD4L.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	5.68
270 44 424 000	GT 310.MD4L.40KS315*	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1260W	3010W	6.51
270 44 425 000	GT 310.MD4L.50KS315*	II	IP54	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.18
270 44 432 000	GT 310.MD4L.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	6.98
270 44 522 000	GT 310.MD4L.25PU315*	II	IP54	25	H07BQ-F 3G1,5	230V~/16A	1500W	3600W	4.78
270 44 524 000	GT 310.MD4L.40PU315*	II	IP54	40	H07BQ-F 3G1,5	230V~/16A	1400W	3340W	6.28
270 44 525 000	GT 310.MD4L.50PU315*	II	IP54	50	H07BQ-F 3G1,5	230V~/16A	1250W	3600W	7.28
270 44 532 000	GT 310.MD4L.25PU325*	II	IP54	25	H07BQ-F 3G2,5	230V~/16A	2560W	3680W	5.58

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Special rubber

GT 310.MD5



- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 46 000 000	GT 310.MD5					230V~/16A			2.01
270 46 422 000	GT 310.MD5.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	5.71
270 46 424 000	GT 310.MD5.40KS315*	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1260W	3010W	7.81
270 46 425 000	GT 310.MD5.50KS315*	II	IP54	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.21
270 46 432 000	GT 310.MD5.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	4.81
270 46 522 000	GT 310.MD5.25PU315*	II	IP54	25	H07BQ-F 3G1,5	230V~/16A	1500W	3600W	5.93
270 46 524 000	GT 310.MD5.40PU315*	II	IP54	40	H07BQ-F 3G1,5	230V~/16A	1400W	3340W	6.31
270 46 525 000	GT 310.MD5.50PU315*	II	IP54	50	H07BQ-F 3G1,5	230V~/16A	1250W	3600W	7.31

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Special rubber

GT 310.MD5L



- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- voltage indicator (L)
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 47 000 000	GT 310.MD5L					230V~/16A			2.02
270 47 425 000	GT 310.MD5L.50KS315*	II	IP54	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.22
270 47 525 000	GT 310.MD5L.50PU315*	II	IP54	50	H07BQ-F 3G1,5	230V~/16A	1250W	3600W	7.32

GT 380.MD6



- 6 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
275 48 000 000	GT 380.MD6					230V~/16A			4.50
275 48 435 000	GT 380.MD6.50KS325*	II	IP54	50	H07RN-F 3G2,5	230V~/16A	2310W	3680W	14.10
275 48 525 000	GT 380.MD6.50PU315*	II	IP54	50	H07BQ-F 3G1,5	230V~/16A	1250W	3600W	9.80
275 48 535 000	GT 380.MD6.50PU325*	II	IP54	50	H07BQ-F 3G2,5	230V~/16A	1500W	3600W	12.30

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Special rubber

GT 380.MD6L



- 6 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- voltage indicator (L)
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
275 50 000 000	GT 380.MD6L					230V~/16A			4.51
275 50 435 000	GT 380.MD6L.50KS325*	II	IP54	50	H07RN-F 3G2,5	230V~/16A	2310W	3680W	14.11
275 50 535 000	GT 380.MD6L.50PU325*	II	IP54	50	H07BQ-F 3G2,5	230V~/16A	1500W	3600W	12.31



GT 450.MD5



- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 42 000 000	GT 450.MD5					230V~/16A			5.89
280 42 435 000	GT 450.MD5.50KS325*	II	IP54	50	H07RN-F 3G2,5	230V~/16A	1850W	3600W	15.49
280 42 535 000	GT 450.MD5.50PU325*	II	IP44	50	H07BQ-F 3G2,5	230V~/16A	1850W	3600W	13.69

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Sheet steel

HT 311.MD3



- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
350 40 000 000	HT 311.MD3	I				230V~/16A			2.70
350 40 125 000	HT 311.MD3.50KK315	I	IP54	50	H05VV-F 3G1,5	230V~/16A	1210W	3200W	7.50
350 40 322 000	HT 311.MD3.25KG315	I	IP54	25	H05RR-F 3G1,5	230V~/16A	1470W	3010W	5.70
350 40 325 000	HT 311.MD3.50KG315	I	IP54	50	H05RR-F 3G1,5	230V~/16A	1140W	3010W	9.20
350 40 422 000	HT 311.MD3.25KS315	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1470W	3010W	6.40
350 40 424 000	HT 311.MD3.40KS315	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1140W	3010W	8.50
350 40 425 000	HT 311.MD3.50KS315	I	IP54	50	H07RN-F 3G1,5	230V~/16A	1140W	3010W	9.90
350 40 432 000	HT 311.MD3.25KS325	I	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	7.70

HT 305.MD4



- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
333 42 000 000	HT 305.MD4					230V~/16A			4.30
333 42 435 000	HT 305.MD4.50KS325	I	IP54	50	H07RN-F 3G2,5	230V~/16A	1500W	3600W	14.10

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Sheet steel

HT 305.MD4L



- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- voltage indicator (L)

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
333 44 000 000	HT 305.MD4L					230V~/16A			3.52
333 44 435 000	HT 305.MD4L50KS325	I	IP54	50	H07RN-F 3G2,5	230V~/16A	1500W	3600W	14.20

HT 305.MD5



- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
333 46 000 000	HT 305.MD5					230V~/16A			4.39
333 46 435 000	HT 305.MD5.50KS325	I	IP54	50	H07RN-F 3G2,5	230V~/16A	1500W	3600W	14.20

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Sheet steel

HT 305.MD5L



- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- voltage indicator (L)

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
333 48 000 000	HT 305.MD5L					230V~/16A			4.40
333 48 435 000	HT 305.MD5L.50KS325	I	IP54	50	H07RN-F 3G2,5	230V~/16A	1500W	3600W	14.30

HT 380.MD4



- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
360 42 000 000	HT 380.MD4					230V~/16A			5.50
360 42 435 000	HT 380.MD4.50KS325	I	IP40	50	H07RN-F 3G2,5	230V~/16A	1500W	3600W	15.10

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Sheet steel

HT 380.MD4L



- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- voltage indicator (L)

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
360 44 000 000	HT 380.MD4L					230V~/16A			5.51
360 44 435 000	HT 380.MD4L.50KS325	I	IP40	50	H07RN-F 3G2,5	230V~/16A	1500W	3600W	15.11

HT 380.MD5



- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
360 46 000 000	HT 380.MD5					230V~/16A			5.41
360 46 435 000	HT 380.MD5.50KS325	I	IP40	50	H07RN-F 3G2,5	230V~/16A	1500W	3600W	16.52

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Sheet steel

HT 380.MD5L



- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- voltage indicator (L)

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
360 48 000 000	HT 380.MD5L					230V~/16A			5.41
360 48 435 000	HT 380.MD5L.50KS325	I	IP40	50	H07RN-F 3G2,5	230V~/16A	1500W	3600W	16.52

HT 480.MD4



- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
370 42 000 000	HT 480.MD4					230V~/16A			7.52

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Sheet steel



HT 480.MD4L



- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- voltage indicator (L)

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
370 44 000 000	HT 480.MD4L					230V~/16A			7.60



HT 480.MD5



- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
370 46 000 000	HT 480.MD5					230V~/16A			7.56

Voltage:
Fittings:
Material:

230V 16A
Machine sockets with hinged cover
Sheet steel



HT 480.MD5L



- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- voltage indicator (L)

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
370 48 000 000	HT 480.MD5L					230V~/16A			7.57

Voltage:
Fittings:
Material:

230V 16A
Machine sockets resistant to pressurised water
Special rubber



GT 310.WS1



- suitable for wet areas
- 1 earthed socket which is resistant to pressurised water, 2-pin + E, 16A, 230V (IP68)
- bayonet closure
- thermal protection
- locking brake screw
- fitted with cable, includes plug which is resistant to pressurised water at the end of the cable
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 31 000 000	GT 310.WS1					230V~/16A			2.06
270 31 422 000	GT 310.WS1.25KS315*	II	IP55	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	5.76
270 31 424 000	GT 310.WS1.40KS315*	II	IP55	40	H07RN-F 3G1,5	230V~/16A	1300W	3600W	6.30
270 31 425 000	GT 310.WS1.50KS315*	II	IP55	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.26

Voltage:
Fittings:
Material:

230V 16A
Machine sockets resistant to pressurised water
Special rubber

GT 310.WS3




- suitable for wet areas
- 1 earthed socket which is resistant to pressurised water, 2-pin + E, 16A, 230V (IP68)
- bayonet closure
- thermal protection
- locking brake screw
- fitted with cable, includes plug which is resistant to pressurised water at the end of the cable
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 35 000 000	GT 310.WS3					230V~/16A			2.06
270 35 422 000	GT 310.WS3.25KS315*	II	IP55	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	5.76
270 35 425 000	GT 310.WS3.50KS315*	II	IP55	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.26
270 35 432 000	GT 310.WS3.50KS315*	II	IP55	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	7.06
270 35 522 000	GT 310.WS3.50KS315*	II	IP55	25	H07BQ-F 3G1,5	230V~/16A	1500W	3600W	4.86
270 35 524 000	GT 310.WS3.40PU315*	II	IP55	40	H07BQ-F 3G1,5	230V~/16A	1400W	3340W	6.30
270 35 525 000	GT 310.WS3.50PU315*	II	IP55	50	H07BQ-F 3G1,5	230V~/16A	1250W	3600W	7.36
270 35 532 000	GT 310.WS3.25PU325*	II	IP55	25	H07BQ-F 3G2,5	230V~/16A	2560W	3680W	5.66
270 35 526 000	GT 310.WS3.40PU325*	II	IP55	40	H07BQ-F 3G2,5	230V~/16A	1980W	3680W	8.15

Voltage:
Fittings:
Material:

230V 16A
Machine sockets resistant to pressurised water
Special rubber

GT 310.WS3-IP67



- suitable for wet areas
- 3 earthed sockets which are resistant to pressurised water, 2-pin + E, 16A, 230V (IP68)
- bayonet closure
- thermal protection
- locking brake screw
- plug which is resistant to pressurised water at the end of the cable
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Our new GT 310.WS3-IP67 (patent no. BE 3 316 429 B1) has IP67 protection for the entire drum and is therefore ideal for safe use in wet areas. Intermittent submersion* of the entire drum body therefore no longer presents a risk for people or the environment.

Application areas for this extremely robust special rubber cable drum include emergency workers (fire services, technical relief workers, disaster response workers), mining, military, shipbuilding, etc.



Plug which is resistant to pressurised water fitted at the end of the cable



Cover with 3 earthed sockets which are resistant to pressurised water

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 67 422 000	GT 310.WS3.25KS315-IP67*	II	IP67	25	H07RN-F 3G1,5	230V~/16A	1250W	3600W	5.76
270 67 424 000	GT 310.WS3.40KS315-IP67*	II	IP67	40	H07RN-F 3G1,5	230V~/16A	1260W	3010W	7.86
270 67 425 000	GT 310.WS3.50KS315-IP67*	II	IP67	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.26



[Go to the product video](#)

Voltage:
Fittings:
Material:

230V 16A
Machine sockets resistant to pressurised water
Special rubber

GT 380.WS4



- suitable for wet areas
- 4 earthed sockets which are resistant to pressurised water, 2-pin + E, 16A, 230V (IP68)
- bayonet closure
- thermal protection
- locking brake screw
- when fitted with cable, includes plug which is resistant to pressurised water at the end of the cable
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
275 34 000 000	GT 380.WS4					230V~/16A			4.60
275 34 425 000	GT 380.WS4.50KS315	II	IP55	50	H07RN-F 3G1,5	230V~/16A	1470W	3680W	11.80
275 34 435 000	GT 380.WS4.50KS325*	II	IP55	50	H07RN-F 3G2,5	230V~/16A	2310W	3680W	14.20
275 34 525 000	GT 380.WS4.50PU315*	II	IP55	50	H07BQ-F 3G1,5	230V~/16A	1640W	3680W	9.90
275 34 535 000	GT 380.WS4.50PU325*	II	IP55	50	H07BQ-F 3G2,5	230V~/16A	2560W	3680W	12.40

Voltage:
Fittings:
Material:

230V 16A
Machine sockets resistant to pressurised water
Sheet steel

HT 300K.WS3



- 3 earthed sockets which are resistant to pressurised water, 2-pin + E, 16A, 230V
- bayonet closure
- thermal protection
- locking brake screw
- fitted with cable, includes plug which is resistant to pressurised water at the end of the cable

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
331 35 000 000	HT 300K.WS3					230V~/16A			3.34
331 35 432 000	HT 300K.WS3.25KS325	I	IP54	25	H07RN-F 3G2,5	230V~/16A	1900W	3600W	8.60
331 35 433 000	HT 300K.WS3.33KS325	I	IP54	33	H07RN-F 3G2,5	230V~/16A	1700W	3600W	10.70

HT 380.WS3



- 3 earthed sockets which are resistant to pressurised water, 2-pin + E, 16A, 230V
- bayonet closure
- thermal protection
- locking brake screw
- fitted with cable, includes plug which is resistant to pressurised water at the end of the cable

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
360 35 000 000	HT 380.WS3					230V~/16A			6.12
360 35 435 000	HT 380.WS3.50KS325	I	IP40	50	H07RN-F 3G2,5	230V~/16A	1500W	3600W	16.12

Voltage:
Fittings:
Material:

230V 16A
Machine sockets, belg./french version, hinged cover
Plastic

IT 266.MD3B




- Belgian/French version
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- also available with optional voltage indicator

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
230 93 000 000	IT 266.MD3B					230V~/16A			1.40
230 93 122 000	IT 266.MD3B.25KK315	II	IP20	25	H05VV-F 3G1,5	230V~/16A	1200W	3220W	4.40
230 93 325 000	IT 266.MD3B.50KG315	II	IP20	50	H05RR-F 3G1,5	230V~/16A	1000W	3220W	7.00

Voltage:
Fittings:
Material:

230V 16A
Machine sockets, belg./french version, hinged cover
Special rubber


GT 235.MD3B



- Belgian/French version
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
200 93 000 000	GT 235.MD3B					230V~/16A			1.18
200 93 322 000	GT 235.MD3B.25KG315	II	IP20	25	H05RR-F 3G1,5	230V~/16A	1300W	3220W	2.28
200 93 422 000	GT 235.MD3B.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1300W	3220W	2.28

GT 310.MD4B




- Belgian/French version
- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 93 000 000	GT 310.MD4B					230V~/16A			2.10
270 93 325 000	GT 310.MD4B.50KG315	II	IP20	50	H05RR-F 3G1,5	230V~/16A	1250W	3600W	7.37
270 93 422 000	GT 310.MD4B.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	6.10

Voltage:
Fittings:
Material:

230V 16A
Machine sockets, belg./french version, hinged cover
Special rubber

GT 310.MD4L.B



- Belgian/French version
- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- voltage indicator (L)
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 94 000 300	GT 310.MD4L.B					230V~/16A			2.20
270 94 432 000	GT 310.MD4L.B.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	6.60

GT 310.MD5L.B



- Belgian/French version
- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- voltage indicator (L)
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 95 000 000	GT 310.MD5L.B					230V~/16A			2.20

Voltage:
Fittings:
Material:

230V 16A
CEE sockets
Special rubber

GT 310.3C316



- 3 CEE socket, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 11 000 000	GT 310.3C316					230V~/16A			2.04
270 11 422 000	GT 310.3C316.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	5.74
270 11 425 000	GT 310.3C316.50KS315*	II	IP54	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.24
270 11 432 000	GT 310.3C316.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	7.04
270 11 532 000	GT 310.3C316.25PU325*	II	IP54	25	H07BQ-F 3G2,5	230V~/16A	2560W	3680W	5.74

GT 310.2C316MD1



- 2 CEE sockets, 2-pin + E, 16A, 230V
- 1 earthed machine socket, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- suitable for use on campsites and boats
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 20 000 000	GT 310.2C316MD1					230V~/16A			2.20
270 20 422 000	GT 310.2C316MD1.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1250W	3600W	5.74
270 20 432 000	GT 310.2C316MD1.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	8.20

Voltage:
Fittings:
Material:

230V 16A
CEE sockets
Special rubber



GT 310.C316MD3



- 1 CEE socket, 2-pin + E, 16A, 230V
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 17 000 000	GT 310.C316MD3					230V~/16A			2.04
270 17 422 000	GT 310.C316MD3.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1470W	3010W	5.74
270 17 425 000	GT 310.C316MD3.50KS315*	II	IP54	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.24
270 17 432 000	GT 310.C316MD3.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	7.04
270 17 433 000	GT 310.C316MD3.33KS325*	II	IP54	33	H07RN-F 3G2,5	230V~/16A	2000W	3600W	8.40

Voltage:
Fittings:
Material:

230V 16A
CEE sockets
Sheet steel

HT 300K.3C316



- 3 CEE sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
331 11 000 000	HT 300K.3C316					230V~/16A			3.54
331 11 422 000	HT 300K.3C316.25KS315	I	IP54	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	9.00
331 11 432 000	HT 300K.3C316.25KS325	I	IP54	25	H07RN-F 3G2,5	230V~/16A	1900W	3600W	8.60

HT 300K.C316MD3



- 1 CEE socket, 2-pin + E, 16A, 230V
- 3 earthed machine sockets, 2-pin + E, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
331 17 000 000	HT 300K.C316MD3					230V~/16A			3.40
331 17 422 000	HT 300K.C316MD3.25KS315	I	IP54	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	7.10
331 17 425 000	HT 300K.C316MD3.50KS315	I	IP54	50	H07RN-F 3G1,5	230V~/16A	1000W	3600W	11.40

Voltage:
Fittings:
Material:

230V 16A
Residual current device
Special rubber



GT 310.FI.MD3




- residual current device, 25A / 30mA, 0.03sec
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 57 000 000	GT 310.FI.MD3					230V~/16A			2.25
270 57 422 000	GT 310.FI.MD3.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1470W	3010W	5.95
270 57 424 000	GT 310.FI.MD3.40KS315*	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1260W	3010W	9.30
270 57 425 000	GT 310.FI.MD3.50KS315*	II	IP54	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.45
270 57 432 000	GT 310.FI.MD3.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	7.25
270 57 522 000	GT 310.FI.MD3.25PU315*	II	IP54	25	H07BQ-F 3G1,5	230V~/16A	1500W	3600W	4.70
270 57 525 000	GT 310.FI.MD3.50PU315*	II	IP54	50	H07BQ-F 3G1,5	230V~/16A	1250W	3600W	7.55
270 57 532 000	GT 310.FI.MD3.25PU325*	II	IP54	25	H07BQ-F 3G2,5	230V~/16A	2560W	3680W	5.85

Voltage:
Fittings:
Material:

230V 16A
Residual current device
Special rubber



GT 310.FI.2C316



- residual current device, 25A / 30mA, 0.03sec
- 2 CEE sockets, 2-pin + E, 16A
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 60 000 000	GT 310.FI.2C316					230V~/16A			2.16
270 60 425 000	GT 310.FI.2C316.50KS315*	II	IP54	50	H07RN-F 3G1,5	230V~/16A	1250W	3600W	9.60
270 60 432 000	GT 310.FI.2C316.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	7.75



GT 450.FI.MD5



- residual current device, 40A / 30mA, 0.03sec
- 5 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 58 000 000	GT 450.FI.MD5					230V~/16A			7.35
280 58 465 000	GT 450.FI.MD5.50KS525*	II	IP54	50	H07RN-F 5G2,5	230V~/16A	1800W	3600W	25.00

Voltage:
Fittings:
Material:

230V 16A
Residual current device
Sheet steel

HT 381.FI.MD3



- residual current device, 25A / 30mA, 0.03sec
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
362 57 000 000	HT 381.FI.MD3					230V~/16A			6.27
362 57 432 000	HT 381.FI.MD3.25KS325	I	IP40	25	H07RN-F 3G2,5	230V~/16A	2200W	3600W	11.27
362 57 425 000	HT 381.FI.MD3.50KS315	I	IP40	50	H07RN-F 3G1,5	230V~/16A	1300W	3600W	13.47
362 57 422 000	HT 381.FI.MD3.25KS315	I	IP40	25	H07RN-F 3G1,5	230V~/16A	2000W	3600W	9.97
362 57 435 000	HT 381.FI.MD3.50KS325	I	IP40	50	H07RN-F 3G2,5	230V~/16A	1800W	3600W	15.87

HT 381.FI.MD3B



- Belgian/French version
- residual current device, 25A / 30mA, 0.03sec
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
362 93 000 000	HT 381.FI.MD3B					230V~/16A			6.32

Voltage:
Fittings:
Material:

230V 16A
Electricity meter
Special rubber

GT 310.SZ.MD3



- electric supply meter **not calibrated**
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 34 000 000	GT 310.SZ.MD3					230V~/16A			1.97
270 34 422 000	GT 310.SZ.MD3.25KS315*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1470W	3010W	5.76
270 34 424 000	GT 310.SZ.MD3.40KS315*	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1480W	2300W	8.23
270 34 432 000	GT 310.SZ.MD3.25KS325*	II	IP54	25	H07RN-F 3G2,5	230V~/16A	2310W	3680W	6.97

GT 310.SZG.MD3



- electric supply meter **calibrated**
- self-closing hinged covers
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 34 422 300	GT 310.SZG.MD3.25KS315	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1470W	3010W	5.76
270 34 424 300	GT 310.SZG.MD3.40KS315	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1480W	2300W	8.23

Voltage:
Fittings:
Material:

230V 16A
PRCD-S
Special rubber

GT 310.MD4L-PRCD-S



Mobile personal protection

- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the brake screw
- voltage indicator (L)
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

The PRCD-S (Personal Residual Current Device - Safety) enables current to be drawn safely from on-site sockets.

The PRCD-S checks sockets – especially the protective conductors – to ensure that they are working properly and only allows current to be drawn from safe sockets.

The personal protection safety plug is the portable protective device for all construction and assembly sites in accordance with the requirements of the professional associations, the German Federal Ministry for Labour and Social Affairs and the accident prevention regulation of the fire services.



Overview of PRCD-S

- Residual current device (RCD)
- Protective conductor detection (checking function prior to operation)
- Protective conductor monitoring (checking function during operation)
- External voltage detection
- Undervoltage tripping function

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 44 422 430	GT 310.MD4L.25KS315-PRCDS*	II	IP54	25	H07RN-F 3G1,5	230V~/16A	1500W	3600W	5.68
270 44 424 430	GT 310.MD4L.40KS315-PRCDS*	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1260W	3010W	6.51
270 44 522 430	GT 310.MD4L.25PU315-PRCDS*	II	IP54	25	H07BQ-F 3G1,5	230V~/16A	1500W	3600W	4.78
270 44 524 430	GT 310.MD4L.40PU315-PRCDS*	II	IP54	40	H07BQ-F 3G1,5	230V~/16A	1400W	3340W	6.28

Voltage:
Fittings:
Material:

230V 16A
LED
Special rubber

GT 310.LED



- special rubber cable drum with 1 7W LED light + on/off switch
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base

This innovative product solution really packs a punch.

Thanks to the integrated LED light, there is no need for an additional light source when working in dark places. The cable drum itself can illuminate the work area perfectly at the touch of a button.

When it comes to electrical connections, the LED drum has 3 sockets to prevent users having to rethink the connection options when using several devices. A thermal switch protects against overheating and resulting damage to the drum. And of course, the LED drum is equipped with a rotating hand crank and a parking brake. The LED cable drum is a real ray of light when working in dark places.



- 7W branded LED, luminous flux 400lm
- Colour temperature 2800k
- Very bright, no heat development
- Radiation angle 36°
- GU10 thread
- Energy class A
- Service life approx. 40,000 hours

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 59 000 000	GT 310.LED.MD3					230V~/16A			1.97
270 59 322 000	GT 310.LED.MD3.25KG315		IP40	25	H05RR-F 3G1,5	230V~/16A	1500W	3600W	5.40
270 59 325 000	GT 310.LED.MD3.50KG315		IP40	50	H05RR-F 3G1,5	230V~/16A	1250W	3600W	7.37



[Go to the product video](#)

Voltage:
Einbauten:
Material:

230V 16A
 USB sockets
 Special rubber

GT 310.MD4USB2



- 2 USB charging sockets
- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- practical plug holder at the drum base
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 43 424 000	GT 310.MD4USB2.40KS315	II	IP54	40	H07RN-F 3G1,5	230V~/16A	1260W	3010W	7.77

Voltage:
Fittings:
Material:

230V 16A
Flat slip ring
Plastic



IT 300K.MS3



- slip ring drum with double contacting
- 3-pole flat slip ring, 16A
- 1,5 m H05RR-F 3G1.5 connection cable
- steel tube handle
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
260 31 000 000	IT 300K.MS3		3-pole slip ring, 16A	2.50

Voltage:
Fittings:
Material:

230V 16A
Flat slip ring
Special rubber



GT 450.MS3



- slip ring drum with double contacting
- 3-pole flat slip ring 16A
- 1,5 m H05RR-F 3G1.5 connection cable
- locking protection
- lockable brake screw

Order No.	Item	Cable type	Version	Weight (kg)
280 31 000 000	GT 450.MS3		3-pole slip ring, 16A	7.49

Voltage:
Fittings:
Material:

230V 16A
Flat slip ring
Sheet steel



HT 582.MS3



- slip ring drum with double contacting
- 3-pole flat slip ring 16A
- 1,5 m connection cable H05RR-F 3G1,5
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
379 31 000 000	HT 582.MS3		3-pole slip ring, 16A	12.98

Voltage:
Fittings:
Material:

230V 16A
Flat slip ring
Sheet steel



SK 4822.MS3.16



- slip ring drum with double contacting
- stackable construction cable drum
- 3-pole slip ring 16A
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
432 34 000 000	SK 4822.MS3.16		3-pole slip ring, 16A	17.50

Voltage:
Fittings:
Material:

230V 13A
Machine sockets British Standard
Special rubber

GT 235.MD3-BS



- British version
- 3 earthed machine sockets, 2-pin + E, 13A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
200 40 422 300	GT 235.MD3.25KS315-BS	II	IP54	25	H07RN-F 3G1,5	230V~/13A	1300W	2990W	4.87

GT 310.MD4-BS



- British version
- 4 earthed machine sockets, 2-pin + E, 13A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 42 422 300	GT 310.MD4.25KS315-BS	II	IP54	25	H07RN-F 3x1,5	230V~/13A	1300W	2990W	5.67
270 42 433 300	GT 310.MD4.33KS325-BS	II	IP54	33	H07RN-F 3G2,5	230V~/13A	2000W	2990W	8.40
270 42 425 301	GT 310.MD4.50KS315-BS	II	IP54	50	H07RN-F 3G1,5	230V~/13A	1250W	2990W	9.24

Water and electricity? No problem with the GT 310.WS3 with IP67 protection!



Voltage:
Fittings:
Material:

230V 40A
Flat slip ring
Sheet steel



SK 4823.MS3.40



- slip ring drum with double contacting
- 3-pole high-quality 40A brush slip ring
- stackable construction cable drum
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
433 31 000 500	SK 4823.MS3.40		3-pole slip ring, 40A	22.00

In action



Voltage:
Fittings:
Material:

400V 16A
CEE sockets
Special rubber



GT 310.C516MD3



- 2 CEE sockets, 4-pin + E, 16A, 400V
- 3 earthed machine sockets
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 18 000 000	GT 310.C516MD3					230V~/16A 400V~/16A			2.14
270 18 462 000	GT 310.C516MD3.25KS525*	II	IP54	25	H07RN-F 5G2,5	230V~/16A 400V~/16A	2200W 5500W	3600W 11kW	9.84
270 18 562 000	GT 310.C516MD3.25PU525*	II	IP54	25	H07BQ-F 5G2,5	230V~/16A 400V~/16A	2200W 5500W	3600W 11kW	8.54



GT 310.2C516



- 2 CEE-sockets, 4-pin + E, 16A, 400V
- 2 earthed machine sockets
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 09 000 000	GT 310.2C516					400V~/16A			2.20
270 09 462 000	GT 310.2C516.25KS525*	II	IP54	25	H07RN-F 5G2,5	400V~/16A	5500W	11 kW	9.78

Voltage:
Fittings:
Material:

400V 16A
CEE sockets
Special rubber



GT 310.2C516MD1



- 2 CEE sockets, 4-pin + E, 16A, 400V
- 1 earthed machine socket, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
270 21 000 000	GT 310.2C516MD1					230V~/16A 400V~/16A			2.15
270 21 462 000	GT 310.2C516MD1.25KS525*	II	IP54	25	H07RN-F 5G2,5	230V~/16A 400V~/16A	2200W 5500W	3600W 11kW	9.85
270 21 562 000	GT 310.2C516MD1.25PU525*	II	IP54	25	H07BQ-F 5G2,5	230V~/16A 400V~/16A	2200W 5500W	3600W 11kW	8.55



GT 380.2C516MD4



- 2 CEE sockets, 4-pin + E, 16A, 400V
- 4 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
275 20 000 000	GT 380.2C516MD4					230V~/16A 400V~/16A			4.72
275 20 463 000	GT 380.2C516MD4.33KS525*	II	IP54	33	H07RN-F 5G2,5	230V~/16A 400V~/16A	1800W 4150W	3600W 11kW	14.92
275 20 563 000	GT 380.2C516MD4.33PU525*	II	IP54	33	H07BQ-F 5G2,5	230V~/16A 400V~/16A	2050W 6170W	3680W 11kW	12.52

Voltage:
Fittings:
Material:

400V 16A
CEE sockets
Special rubber



GT 450.516



- 2 CEE sockets, 4-pin + E, 16A, 400V
- 1 CEE socket, 2-pin + E, 16A, 230V
- 2 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 50 000 000	GT 450.516					230V~/16A 400V~/16A			6.17
280 50 462 000	GT 450.516.25KS525*	II	IP54	25	H07RN-F 5G2,5	230V~/16A 400V~/16A	2500W 6580W	3600W 11kW	13.87
280 50 465 000	GT 450.516.50KS525*	II	IP54	50	H07RN-F 5G2,5	230V~/16A 400V~/16A	2310W 5560W	3600W 11kW	21.67
280 50 565 000	GT 450.516.50PU525*	II	IP54	50	H07BQ-F 5G2,5	230V~/16A 400V~/16A	2870W 6930W	3600W 11kW	18.17

Voltage:
Fittings:
Material:

400V 16A
CEE sockets
Sheet steel

HT 305.C516MD3



- 1 CEE socket, 4-pin + E, 16A, 400V
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
333 18 000 000	HT 305.C516MD3					230V~/16A 400V~/16A			4.41
333 18 462 000	HT 305.C516MD3.25KS525	I	IP54	25	H07RN-F 5G2,5	230V~/16A 400V~/16A	1900W 2200W	3600W 11kW	12.20
333 18 463 000	HT 305.C516MD3.33KS525	I	IP54	33	H07RN-F 5G2,5	230V~/16A 400V~/16A	1700W 2000W	3600W 11kW	13.63

HT 305.2C516MD1




- 2 CEE sockets, 4-pin + E, 16A, 400V
- 1 earthed machine socket, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
333 21 000 000	HT 305.2C516MD1					230V~/16A 400V~/16A			3.70
333 21 462 000	HT 305.2C516MD1.25KS525	I	IP54	25	H07RN-F 5G2,5	230V~/16A 400V~/16A	1900W 2200W	3600W 11kW	12.22
333 21 463 000	HT 305.2C516MD1.33KS525	I	IP54	33	H07RN-F 5G2,5	230V~/16A 400V~/16A	1700W 2000W	3600W 11kW	13.60

Voltage:
Fittings:
Material:

400V 16A
CEE sockets
Sheet steel

HT 380.C516MD3



- 1 CEE socket, 4-pin + E, 16A, 400V
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
360 18 000 000	HT 380.C516MD3					230V~/16A 400V~/16A			5.64
360 18 462 000	HT 380.C516MD3.25KS525	I	IP40	25	H07RN-F 5G2,5	230V~/16A 400V~/16A	1800W 2200W	3600W 11kW	13.34
360 18 463 000	HT 380.C516MD3.33KS525	I	IP40	33	H07RN-F 5G2,5	230V~/16A 400V~/16A	1800W 2000W	3600W 11kW	15.84

HT 380.2C516



- 2 CEE sockets, 4-pin + E, 16A, 400V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
360 09 000 000	HT 380.2C516					400V~/16A			5.52
360 09 462 000	HT 380.2C516.25KS525	I	IP40	25	H07RN-F 5G2,5	400V~/16A	2200W	11kW	13.22
360 09 463 000	HT 380.2C516.33KS525	I	IP40	33	H07RN-F 5G2,5	400V~/16A	2000W	11kW	16.30

Voltage:
Fittings:
Material:

400V 16A
CEE sockets
Sheet steel

HT 380.2C516MD1



- with 2 CEE sockets 4-pin + E, 16A, 400V
- with 1 earthed machine socket 2-pin + E, 16A, 230V
- with self-closing hinged cover
- with thermal protection
- with locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
360 21 000 000	HT 380.2C516MD1					230V~/16A 400V~/16A			5.62
360 21 462 000	HT 380.2C516MD1.25KS525	I	IP40	25	H07RN-F 5G2,5	230V~/16A 400V~/16A	1800W 2200W	3600W 11kW	13.98
360 21 463 000	HT 380.2C516MD1.33KS525	I	IP40	33	H07RN-F 5G2,5	230V~/16A 400V~/16A	1800W 2000W	3600W 11kW	15.52

HT 385.C516MD3



- 1 CEE socket 4-pin + E, 16A, 400V
- 3 earthed machine sockets 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
368 81 000 000	HT 385.C516MD3					230V~/16A 400V~/16A			6.64
368 81 465 000	HT 385.C516MD3.50KS525	I	IP40	50	H07RN-F 5G2,5	230V~/16A 400V~/16A	1500W 1800W	3600W 11kW	21.80

Voltage:
Fittings:
Material:

400V 16A
CEE sockets
Sheet steel

HT 385.2C516MD1



- 2 CEE sockets, 4-pin + E, 16A, 400V
- 1 earthed machine socket, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
368 21 000 000	HT 385.2C516MD1					230V~/16A 400V~/16A			5.92
368 21 465 000	HT 385.2C516MD1.50KS525	I	IP40	50	H07RN-F 5G2,5	230V~/16A 400V~/16A	1500W 1800W	3600W 11kW	21.80

HT 480.C516MD3



- 1 CEE socket, 4-pin + E, 16A, 400V
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
370 18 000 000	HT 480.C516MD3					230V~/16A 400V~/16A			7.66
370 18 465 000	HT 480.C516MD3.50KS525	I	IP40	50	H07RN-F 5G2,5	230V~/16A 400V~/16A	1500W 2000W	3600W 11kW	23.16

Voltage:
Fittings:
Material:

400V 16A
CEE sockets
Sheet steel

HT 480.2C516



- 2 CEE sockets, 4-pin + E, 16A, 400V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
370 09 000 000	HT 480.2C516					400V~/16A			8.16
370 09 462 000	HT 480.2C516.25KS525	I	IP40	25	H07RN-F 5G2,5	400V~/16A	2500W	11kW	16.00
370 09 465 000	HT 480.2C516.50KS525	I	IP40	50	H07RN-F 5G2,5	400V~/16A	2000W	11kW	22.88

HT 480.2C516MD1



- 2 CEE sockets, 4-pin + E, 16A, 400V
- 1 earthed machine socket, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
370 21 000 000	HT 480.2C516MD1					230V~/16A 400V~/16A			10.76
370 21 465 000	HT 480.2C516MD1.50KS525	I	IP40	50	H07RN-F 5G2,5	230V~/16A 400V~/16A	1500W 2000W	3600W 11kW	25.91

Voltage:
Fittings:
Material:

400V 16A
CEE sockets
Sheet steel



HT 582.C516MD3



- 1 CEE socket 4-pin + E, 16A, 400V
- 3 earthed machine sockets 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
379 18 000 000	HT 582.C516MD3					230V~/16A 400V~/16A			12.92

Voltage:
Fittings:
Material:

400V 16A
CEE sockets resistant to pressurised water
Special rubber

GT 380.2CW516WS2



- suitable for wet areas
- 2 CEE sockets which are resistant to pressurised water, 4-pin + E, 16A, 400V
- 2 earthed sockets which are resistant to pressurised water, 2-pin + E, 16A, 230V
- bayonet closure
- thermal protection
- locking brake screw
- fitted with cable, includes plug which is resistant to pressurised water at the end of the cable
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
275 35 000 000	GT 380.2CW516WS2					230V~/16A 400V~/16A			4.95
275 35 463 000	GT 380.2CW516WS2.33KS525*	II	IP55	33	H07RN-F 5G2,5	230V~/16A 400V~/16A	1800W 4150W	3600W 11kW	15.08
275 35 563 000	GT 380.2CW516WS2.33PU525*	II	IP55	33	H07BQ-F 5G2,5	230V~/16A 400V~/16A	2050W 6170W	3680W 11kW	12.68

Voltage:
Fittings:
Material:

400V 16A
Residual current device
Special rubber



GT 450.FI.516



- residual current device, 25A / 30mA, 0.03sec
- 2 CEE sockets, 4-pin + E, 16A, 400V
- 1 CEE socket, 2-pin + E, 16A, 230V
- 2 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- 1 automatic fuse, 3-pole, 16A
- 1 automatic fuse, 1-pole, 16A
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 54 000 000	GT 450.FI.516					230V~/16A 400V~/16A			7.42
280 54 462 000	GT 450.FI.516.25KS525*	II	IP54	25	H07RN-F 5G2,5	230V~/16A 400V~/16A	2500W 6580W	3600W 11kW	15.12
280 54 465 000	GT 450.FI.516.50KS525	II	IP54	50	H07RN-F 5G2,5	230V~/16A 400V~/16A	1800W 4850W	3600W 11kW	22.92
280 54 562 000	GT 450.FI.516.25PU525*	II	IP54	25	H07BQ-F 5G2,5	230V~/16A 400V~/16A	2500W 6580W	3600W 11kW	13.82
280 54 565 000	GT 450.FI.516.50PU525*	II	IP54	50	H07BQ-F 5G2,5	230V~/16A 400V~/16A	1800W 4850W	3600W 11kW	19.42

Voltage:
Fittings:
Material:

400V 16A
Residual current device
Special rubber

GT 450.FID.516



- residual current device, 25A / 30mA, 0.03sec
- 3 CEE sockets which are resistant to pressurised water, 4-pin + E, 16A, 400V
- 2 earthed machine sockets which are resistant to pressurised water, 2-pin + E, 16A, 230V
- bayonet closure
- thermal protection
- locking brake screw
- 1 automatic fuse, 3-pole, 16A
- 1 automatic fuse, 1-pole, 16A
- when fitted with cable, includes plug which is resistant to pressurised water at the end of the cable
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 60 000 000	GT 450.FID.516					230V~/16A 400V~/16A			7.41
280 60 465 000	GT 450.FID.516.50KS525*	II	IP55	50	H07RN-F 5G2,5	230V~/16A 400V~/16A	1800W 4850W	3600W 11kW	22.91

Voltage:
Fittings:
Material:

400V 16A
Residual current device
Special rubber

GT 450.FI.2C516MD3



- residual current device, 25A / 30mA, 0.03sec
- 2 CEE sockets, 4-pin + E, 16A, 400V
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- 1 automatic fuse, 3-pole, 16A
- 1 automatic fuse, 1-pole, 16A
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 55 000 000	GT 450.FI.2C516MD3					230V/16A 400V/16A			7.18
280 55 562 000	GT 450.FI.2C516MD3.25PU525	2	IP54	25	H07BQ-F 5G2,5	230V/16A 400V/16A	2500W 6580W	3600W 11kW	12.95

Voltage:
Fittings:
Material:

400V 16A
Residual current device
Special rubber

GT 450.FI.3C516MD2



- residual current device, 25A / 30mA, 0.03sec
- 3 CEE sockets, 4-pin + E, 16A, 400V
- 2 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- 1 automatic fuse, 3-pole, 16A
- 1 automatic fuse, 1-pole, 16A
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 55 000 300	GT 450.FI.3C516MD2	II				230V~/16A			7.24

Voltage:
Fittings:
Material:

400V 16A
Residual current device
Special rubber

HT 482.FI.C516MD3



- residual current device, 25A / 30mA, 0.03sec
- 1 CEE socket, 4-pin + E, 16A, 400V
- 3 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
376 18 000 000	HT 482.FI.C516MD3					230V~/16A 400V~/16A			10.80
376 18 465 000	HT 482.FI.C516MD3.50KS525	I	IP40	50	H07RN-F5G2,5	230V~/16A 400V~/16A	2000W 3000W	3600W 22kW	25.95

Voltage:
Fittings:
Material:

400V 16A
Flat slip ring
Plastic



IT 300K.MS5



- slip ring drum with double contacting
- 5-pole flat slip ring, 16A
- 1,5 m H05RR-F 3G1.5 connection cable
- steel tube handle
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
260 32 000 000	IT 300K.MS5		5-pole slip ring, 16A	3.06

Voltage:
Fittings:
Material:

400V 16A
Flat slip ring
Special rubber



GT 450.MS5



- slip ring drum with double contacting
- 5-pole flat slip ring 16A
- 1,5 m H07RN-F 5G1.5 connection cable
- thermal protection
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
280 32 000 000	GT 450.MS5		5-pole slip ring, 16A	7.00

Voltage:
Fittings:
Material:

400V 16A
Flat slip ring
Sheet steel



HT 582.MS5



- slip ring drum with double contacting
- 5-pole flat slip ring 16A
- 1,5 m connection cable H07RN-F 51,5
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
379 32 000 000	HT 582.MS5		5-pole slip ring, 16A	13.09

Voltage:
Einbauten:
Material:

400V 16A
Flat slip ring
Sheet steel



SK 4822.MS5.16



- slip ring drum with double contacting
- stackable construction cable drum
- 5-pole slip ring 16A
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
432 33 000 000	SK 4822.MS5.16		5-pole slip ring, 16A	17.50

Voltage:
Einbauten:
Material:

400V 16A
Flat slip ring
Sheet steel



HT 381.MS10



- slip ring drum with double contacting
- 10-pole flat slip ring 16A
- without connection cable
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
362 33 000 000	HT 381.MS10		10-pole slip ring 16A	6.36

HT 481.MS10



- slip ring drum with double contacting
- 10-pole flat slip ring 16A
- without connection cable
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
372 33 000 000	HT 481.MS10		with 10-pole slip ring 16A	8.37

Voltage:
Fittings:
Material:

400V 25A
Brush slip ring
Sheet steel



SK 4822.MS5.25



- slip ring drum with double-contacting
- 5 high-quality brush slip rings 25A
- stackable construction cable drum
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
432 32 000 000	SK 4822.MS5.25		5-pole slip ring, 25A	17.90



SK 4823.MS5.25/40



- slip ring drum with double contacting
- high-quality 25A-40A brush slip rings
- stackable construction cable drum
- locking brake screw

Order No.	Item	Cable type	Version	Weight (kg)
433 32 000 000	SK 4823.MS5.25/40		5-pole slip ring, 25A-40A	18.90

Cable drum in use



Voltage:
Fittings:
Material:

400V 32A
CEE sockets
Special rubber

GT 380.C532C516MD2



- 1 CEE socket, 4-pin + E, 32A, 400V
- 1 CEE socket, 4-pin + E, 16A, 400V
- 2 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- 1 contactor, 4-pole, 40A, 400V
- thermal protection
- locking brake screw
- 1 automatic fuse, 3-pole, 16A
- 1 automatic fuse, 1-pole, 16A
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
275 26 000 000	GT 380.C532C516MD2					230V~/16A 400V~/16A 400V~/32A			5.70

GT 450.2C532




- 2 CEE socket, 4-pin + E, 32A, 400V
- self-closing hinged covers
- thermal protection
- locking brake screw
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 55 482 000	GT 450.2C532.25K5560	II	IP54	25	H07RN-F 5G6,0	400V/32A	13,1kW	22kW	21.20

Voltage:
Fittings:
Material:

400V 32A
CEE sockets
Special rubber

GT 450.532



- 1 CEE socket, 4-pin + E, 32A, 400V
- 1 CEE socket, 4-pin + E, 16A, 400V
- 1 CEE socket, 2-pin + E, 16A, 230V
- 2 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- 1 contactor, 4-pole, 40A, 400V
- thermal protection
- locking brake screw
- 1 automatic fuse, 3-pole, 16A
- 1 automatic fuse, 1-pole, 16A
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 52 000 000	GT 450.532					230V~/16A 400V~/16A 400V~/32A			7.15
280 52 482 000	GT 450.532.25KS560*	II	IP54	25	H07RN-F 5G6,0	230V~/16A 400V~/16A 400V~/32A	3680W 11kW 13,1kW	3680W 11kW 22kW	21.55

Voltage:
Fittings:
Material:

400V 32A
CEE sockets
Sheet steel

HT 381.C532MD2



- 1 CEE socket, 4-pin + E, 32A, 400V
- 2 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
362 19 000 000	HT 381.C532MD2					230V~/16A 400V~/32A			6.12

HT 381.2C532



- 2 CEE sockets, 4-pin + E, 32A, 400V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
362 10 000 000	HT 381.2C532					400V~/32A			6.28

Voltage:
Fittings:
Material:

400V 32A
CEE sockets
Sheet steel

HT 381.2C532MD1



- 2 CEE sockets, 4-pin + E, 32A, 400V
- 1 earthed machine socket, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
362 22 000 000	HT 381.2C532MD1					230V~/16A 400V~/32A			6.93

HT 381.C532C516MD1



- 1 CEE socket, 4-pin + E, 32A, 400V
- 1 CEE socket, 4-pin + E, 16A, 400V
- 1 earthed machine socket, 2-pin + E, 16A, 230V
- self-closing hinged cover
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
362 30 000 000	HT 381.C532C516MD1					230V~/16A 400V~/16A 400V~/32A			6.26

Voltage:
Fittings:
Material:

400V 32A
CEE sockets
Sheet steel

HT 481.C532MD2



- 1 CEE socket, 4-pin + E, 32A, 400V
- 2 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
372 19 000 000	HT 481.C532MD2					230V~/16A 400V~/32A			8.21



HT 481.2C532



- 2 CEE sockets, 4-pin + E, 32A, 400V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
372 10 000 000	HT 481.2C532					400V~/32A			8.38
372 10 482 000	HT 481.2C532.25KS560	I	IP40	25	H07RN-F 5G6,0	400V~/32A	6000W	22kW	24.00

Voltage:
Fittings:
Material:

400V 32A
CEE sockets
Sheet steel

HT 481.2C532MD1



- 2 CEE sockets, 4-pin + E, 32A, 400V
- 1 earthed machine socket, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
372 22 000 000	HT 481.2C532MD1					230V~/16A 400V~/32A			8.43

HT 481.C532C516MD1



- 1 CEE socket, 4-pin + E, 32A, 400V
- 1 CEE socket, 4-pin + E, 16A, 400V
- 1 earthed machine socket, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
372 30 000 000	HT 481.C532C516MD1					230V~/16A 400V~/16A 400V~/32A			8.35

Voltage:
Fittings:
Material:

400V 32A
CEE sockets
Sheet steel

HT 582.C532MD2



- 1 CEE socket 4-pin + E, 32A, 400V
- 2 earthed machine sockets 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
379 19 000 000	HT 582.C532MD2					230V~/16A 400V~/32A			12.32

HT 582.2C532



- 2 CEE sockets 4-pin + E, 32A, 400V
- self-closing hinged covers
- thermal protection
- locking brake screw

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
379 10 485 000	HT 582.2C532.50KS560	I	IP40	50	H07RN-F 5x6,0	400V~/32A	4000W	22kW	24.00

Voltage:
Fittings:
Material:

400V 32A
Residual current device
Special rubber

GT 450.FI.532



- residual current device, 40A / 30mA, 0.03sec
- 1 CEE socket, 4-pin + E, 32A, 400V
- 1 CEE socket, 4-pin + E, 16A, 400V
- 1 CEE socket, 2-pin + E, 16A, 230V
- 2 earthed machine sockets, 2-pin + E, 16A, 230V
- self-closing hinged covers
- thermal protection
- locking brake screw
- 1 automatic fuse, 3-pole, 16A
- 1 automatic fuse, 1-pole, 16A
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 56 000 000	GT 450.FI.532					230V~/16A 400V~/16A 400V~/32A			7.44
280 56 482 000	GT 450.FI.532.25KS560*	II	IP54	25	H07RN-F 5G6,0	230V~/16A 400V~/16A 400V~/32A	3680W 11kW 13,1kW	3680W 11kW 22kW	21.84

Voltage:
Fittings:
Material:

400V 32A
Residual current device
Special rubber

GT 450.FID.532



- residual current device, 25A / 30mA, 0.03sec
- 1 CEE socket which is resistant to pressurised water, 4-pin + E, 32A, 400V (IP67)
- 2 CEE sockets which are resistant to pressurised water, 4-pin + E, 16A, 400V (IP67)
- 2 earthed machine sockets which are resistant to pressurised water, 2-pin + E, 16A, 230V (IP68)
- thermal protection
- locking brake screw
- 1 automatic fuse, 3-pole, 16A
- 1 automatic fuse, 1-pole, 16A
- When equipped with H07RN-F or H07BQ-F cable, the cable drum complies to the requirements of the German Social Accident Insurance (DGUV), DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2)*

Order no.	Item	Protection-class	Protection type	Cable (m)	Cable type	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
280 62 000 000	GT 450.FID.532					230V~/16A 400V~/16A 400V~/32A			7.52
280 62 482 000	GT 450.FID.532.25KS560*	II	IP55	25	H07RN-F 5G6,0	230V~/16A 400V~/16A 400V~/32A	3680W 11kW 13,1kW	3680W 11kW 22kW	21.92

Travelling column unit for models HT 380 - HT 582



A practical accessory for use in all kinds of places. Convenient handling, robust design.

Retrofittable, separate travelling column consisting of stable steel tube frame, black powder coating with particularly impact-proof and abrasion-proof surface. With two solid rubber wheels, Ø 140 mm. The cable drums are simply hooked into the angle on the sliding tube with the handle and they centre themselves automatically. Designed for absolutely safe transport.

Order No.	Item	Version	Weight (kg)
397 00 000 000	Travelling column unit	for HT 380 - HT 582	4.00


Travelling unit for GT 380 and GT 450 models



Retrofittable attachment kit made from plastic with high shock resistance. With height-adjustable steel tube handle. With 2 polyamide wheels, ø 140 mm .Easy mounting on drum handle, stable and safe transport.

Order No.	Item	Version	Weight (kg)
397 00 010 000	Travelling unit	for GT 380 and GT 450	2.50

Transport trolley for the SK 310 - SK 450 series



A practical accessory for use in all kinds of places. With 4 steerable wheels. Wheel diameter 100 mm, solid rubber tyres. Corners of the plate protected, mould cavity for SK 310 - SK 450.


Order No.	Item	Version	Weight (kg)
405 99 000 000	TW SK-310-380-450	without brake	10.80


Transport trolley for SK 47 / SK 48 series



A practical accessory for use in all kinds of places. Convenient handling, stable design consisting of angle iron with black powder-coated surface, particularly impact-proof and abrasion-proof. With 2 steering castors and 2 fixed castors, solid rubber tyres, wheel diameter 100 mm, S model with brake (2 wheels with stop fix).


Order No.	Item	Version	Weight (kg)
432 99 000 000	TW 4700/4822	without brake	10.00
432 99 001 000	TW 4700/4822.S	with brake	10.00
433 99 000 000	TW 4701/4823	without brake	11.00
433 99 001 000	TW 4701/4823.S	with brake	11.00

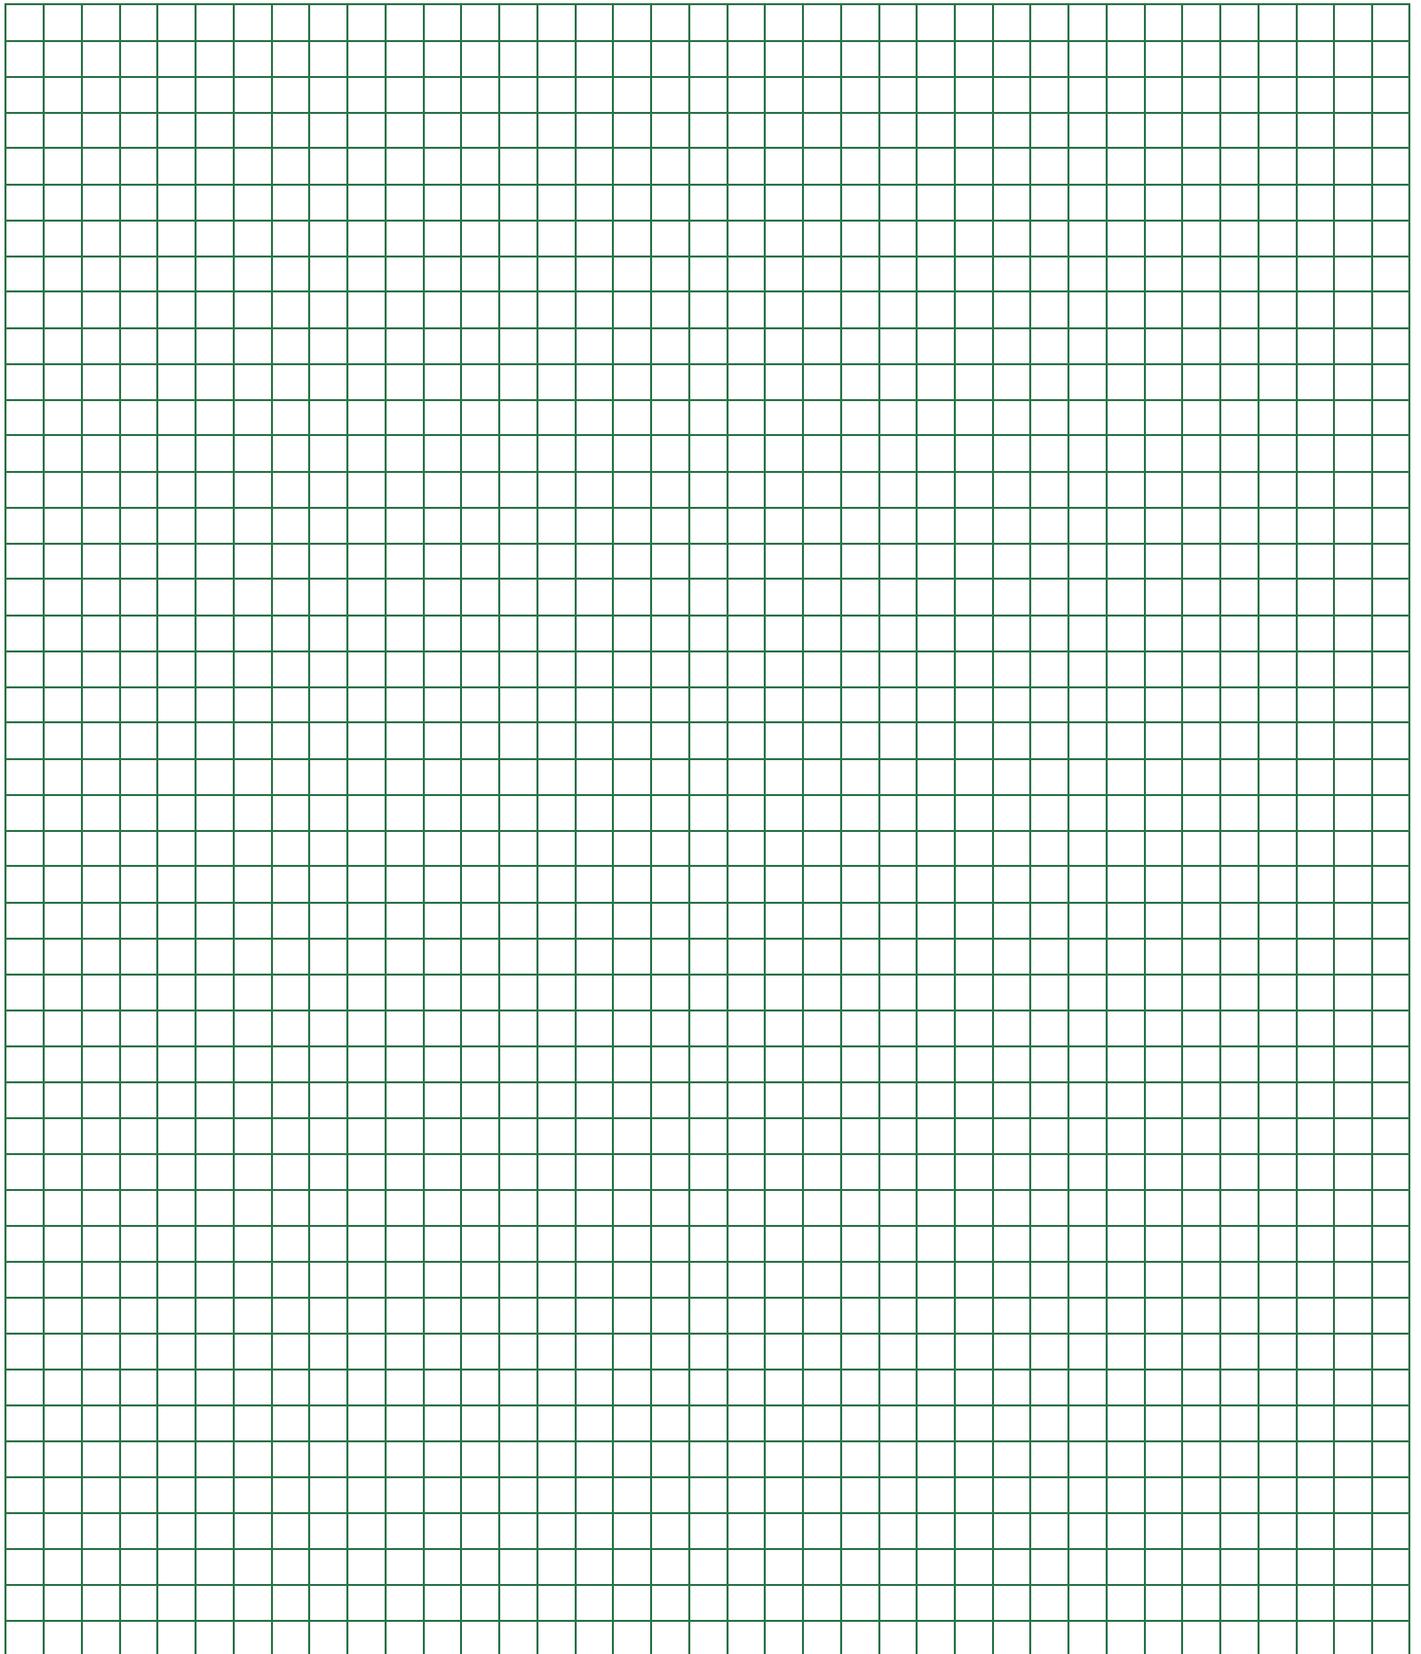

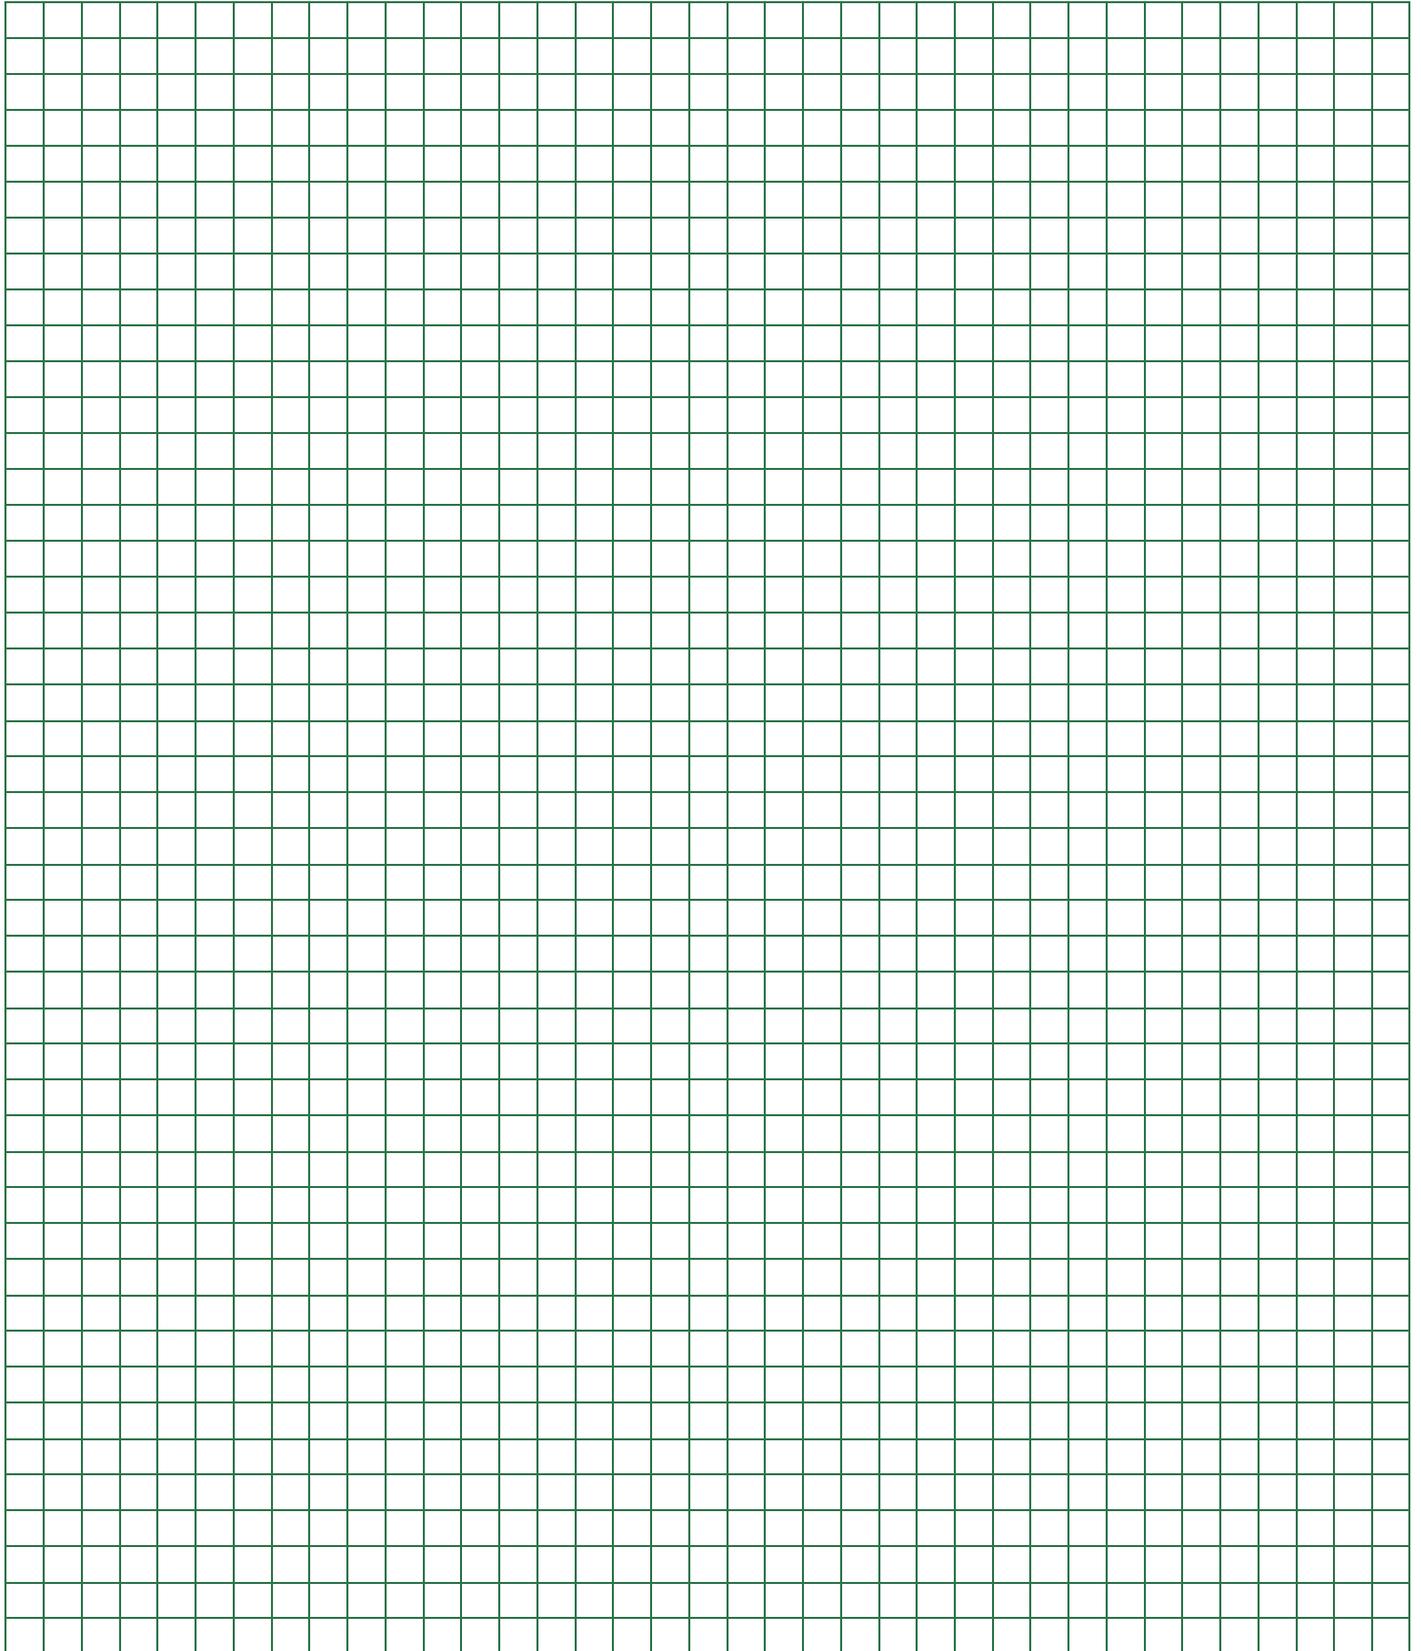


Drum dimensions

GT 235.MD3

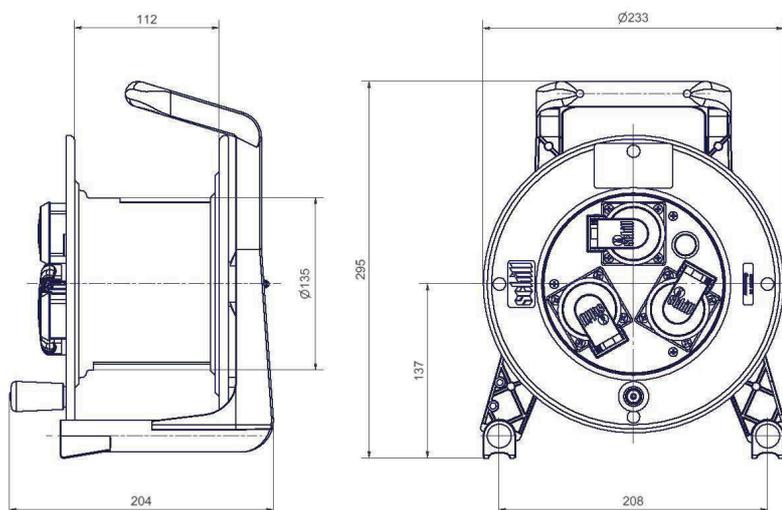


GT 235.MD3L

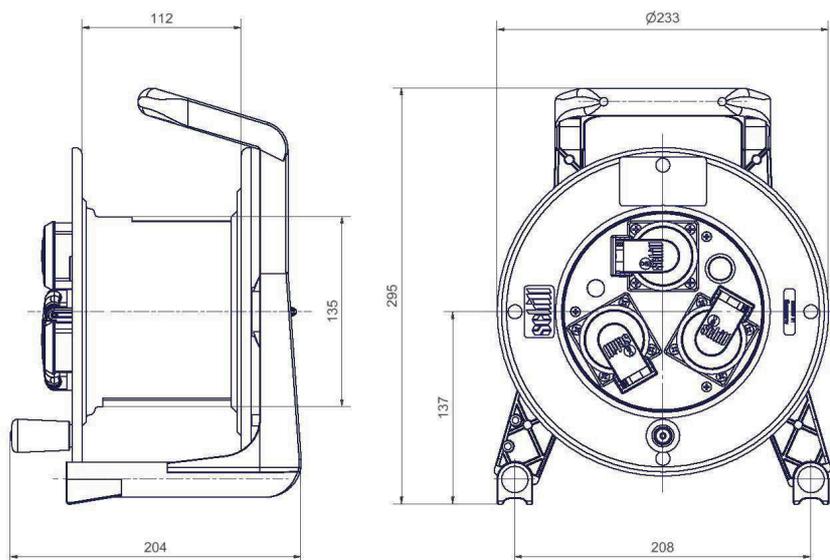


Drum dimensions

GT 235.MD3B

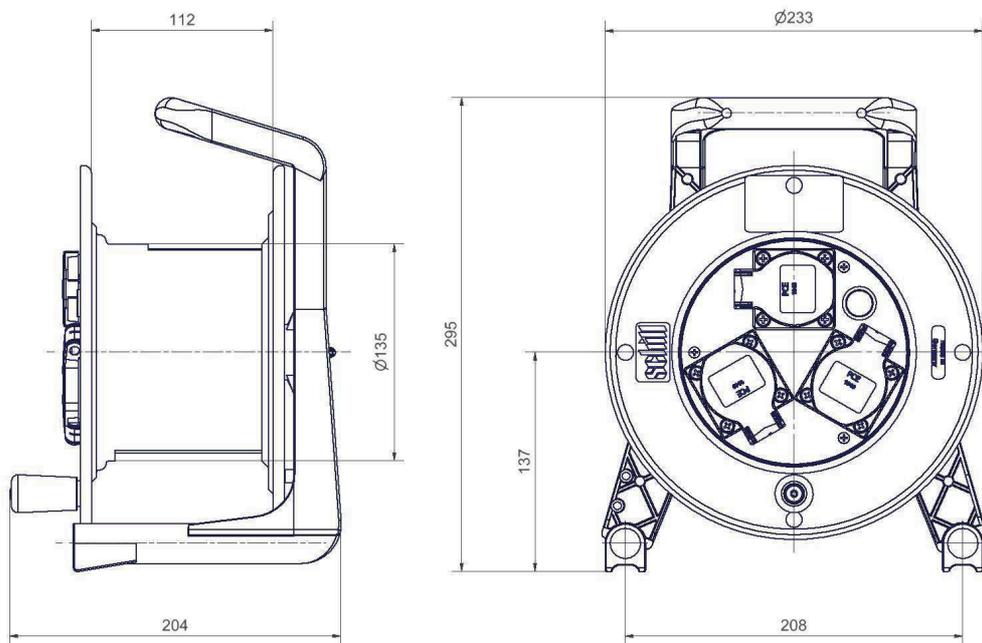


GT 310.MD4

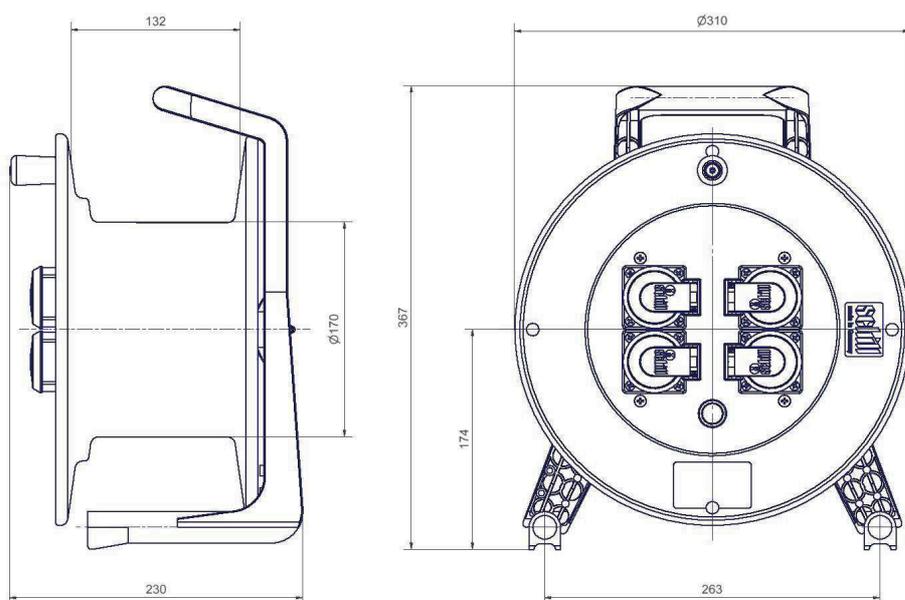


Drum dimensions

GT 310.MD4L

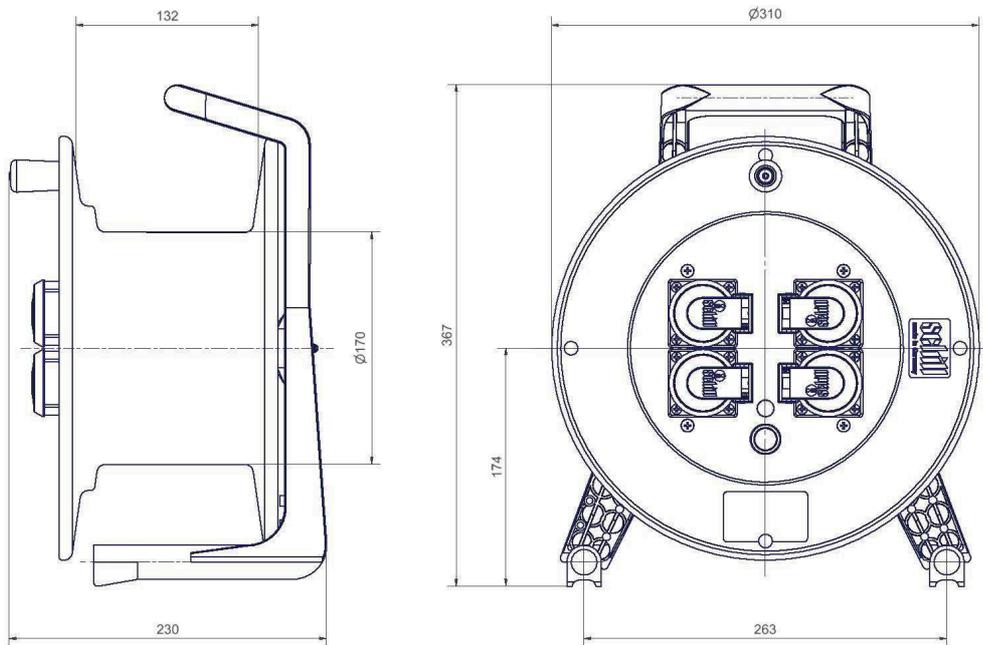


GT 310.MD4B

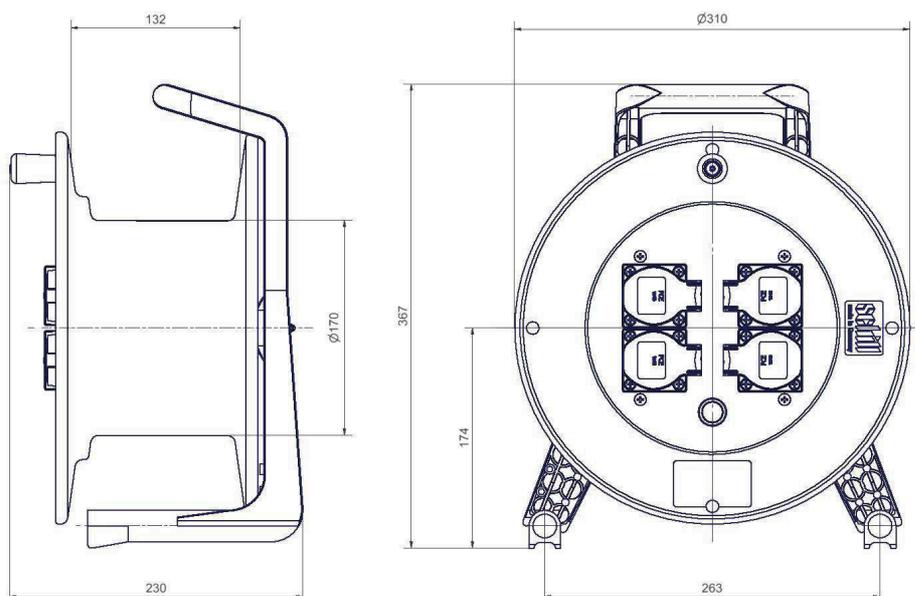


Drum dimensions

GT 310.MD4L.B

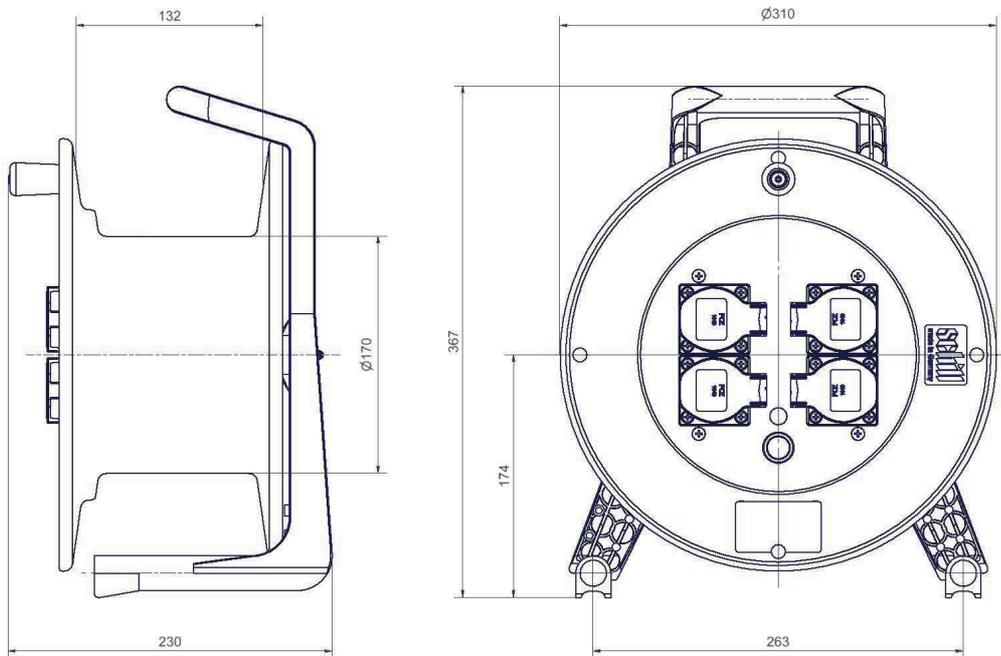


GT 310.MD5

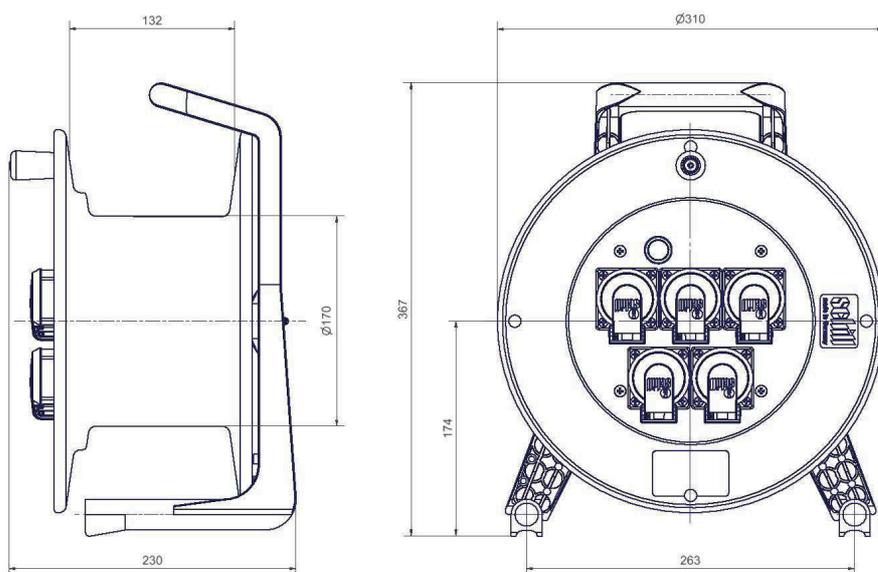


Drum dimensions

GT 310.MD5L

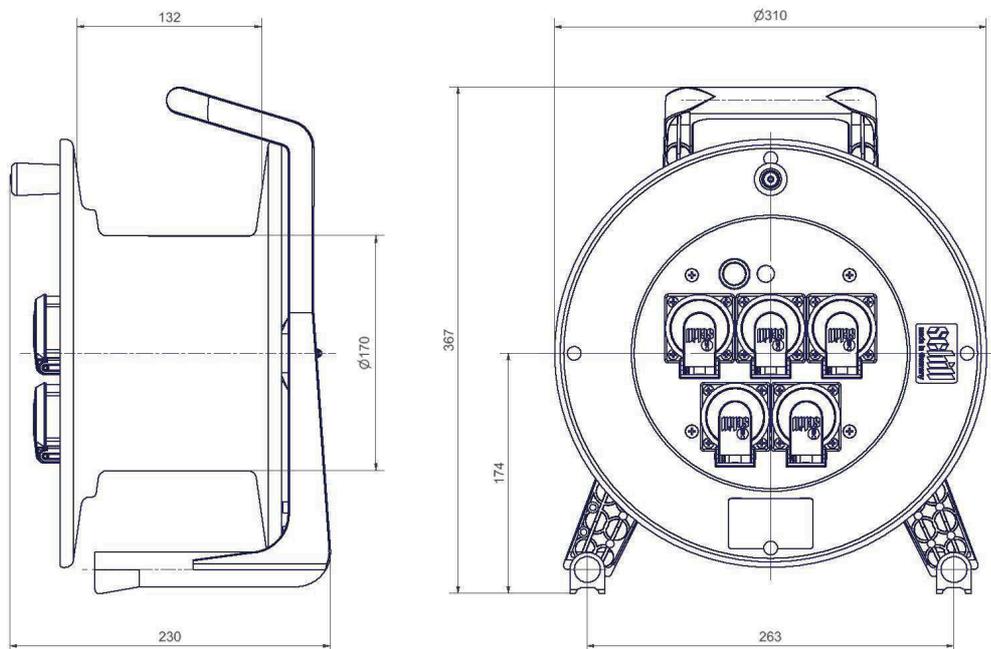


GT 310.MD5L.B

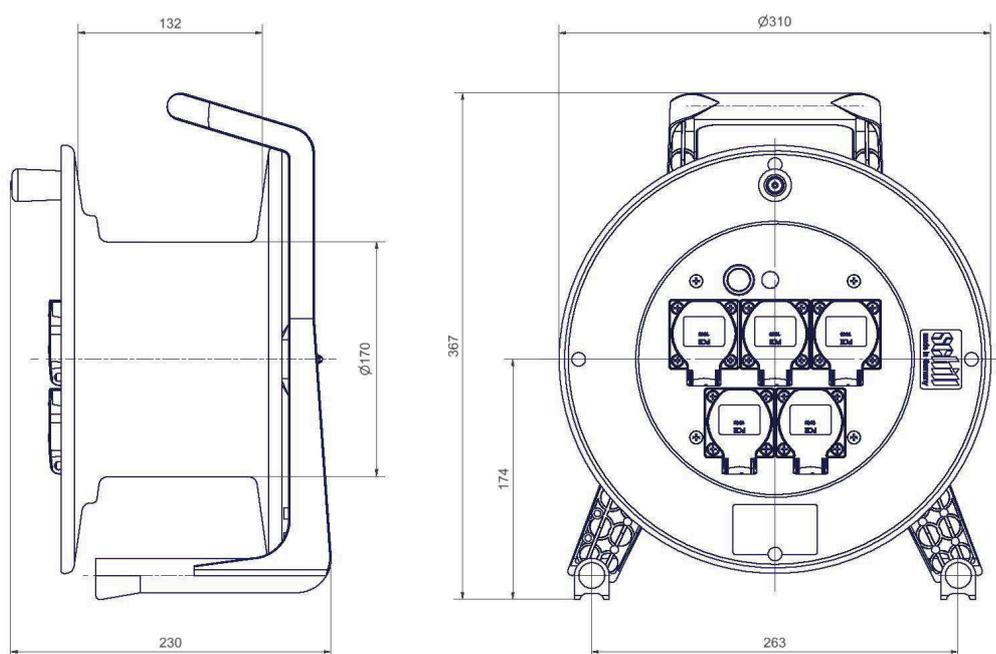


Drum dimensions

GT 310.3C316

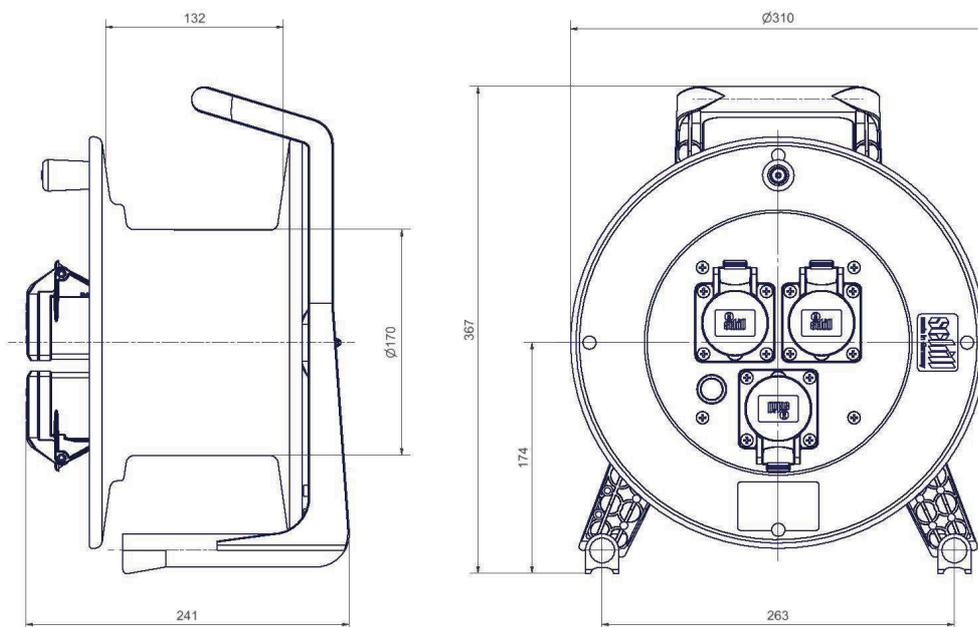


GT 310.2C316MD1

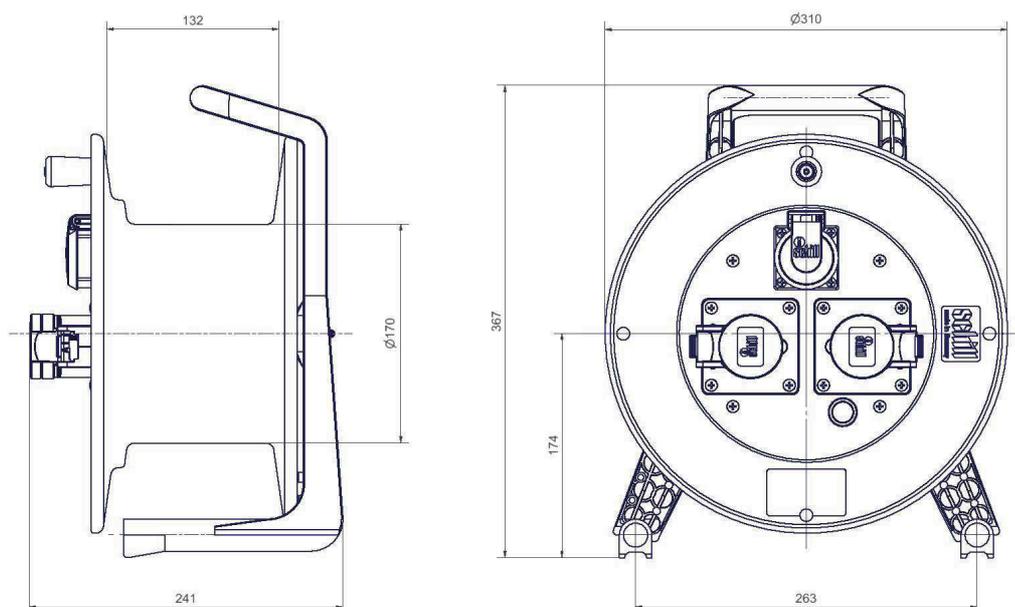


Drum dimensions

GT 310.C316MD3

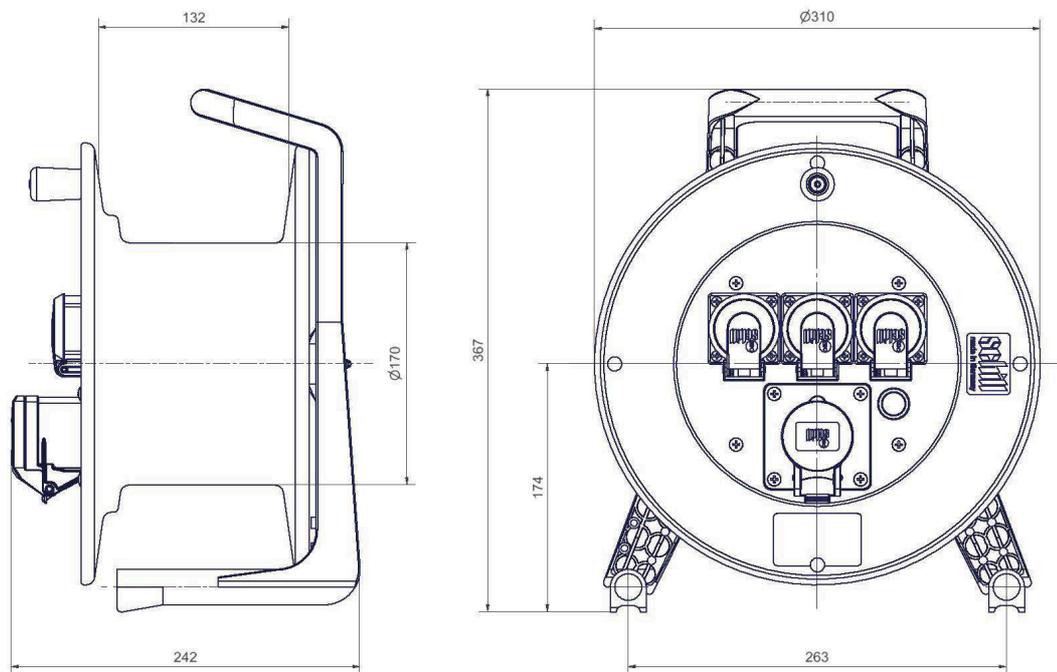


GT 310.2C516

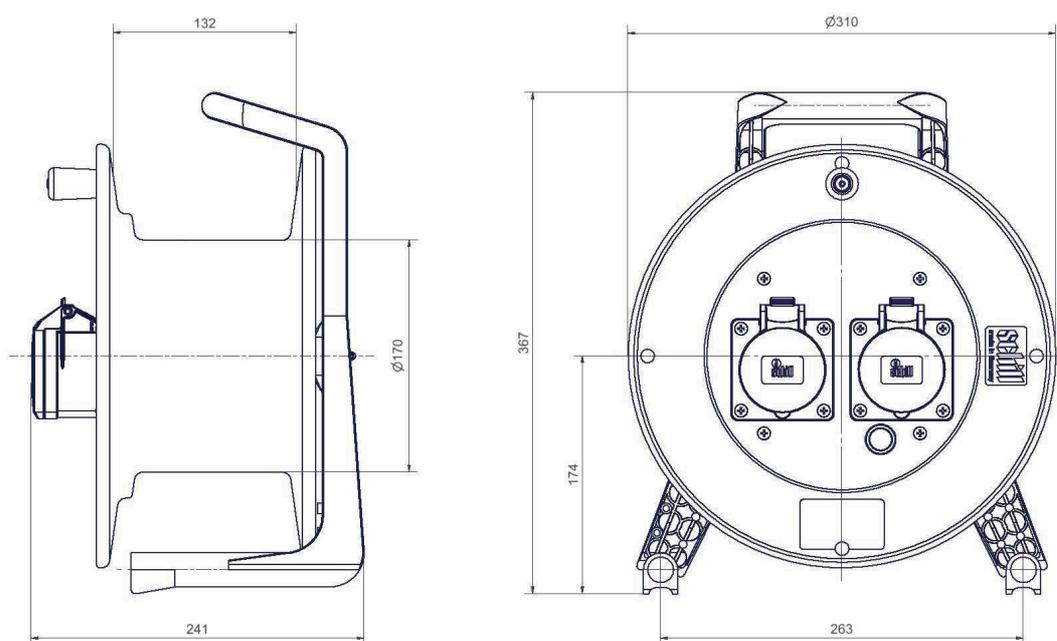


Drum dimensions

GT 310.2C516MD1

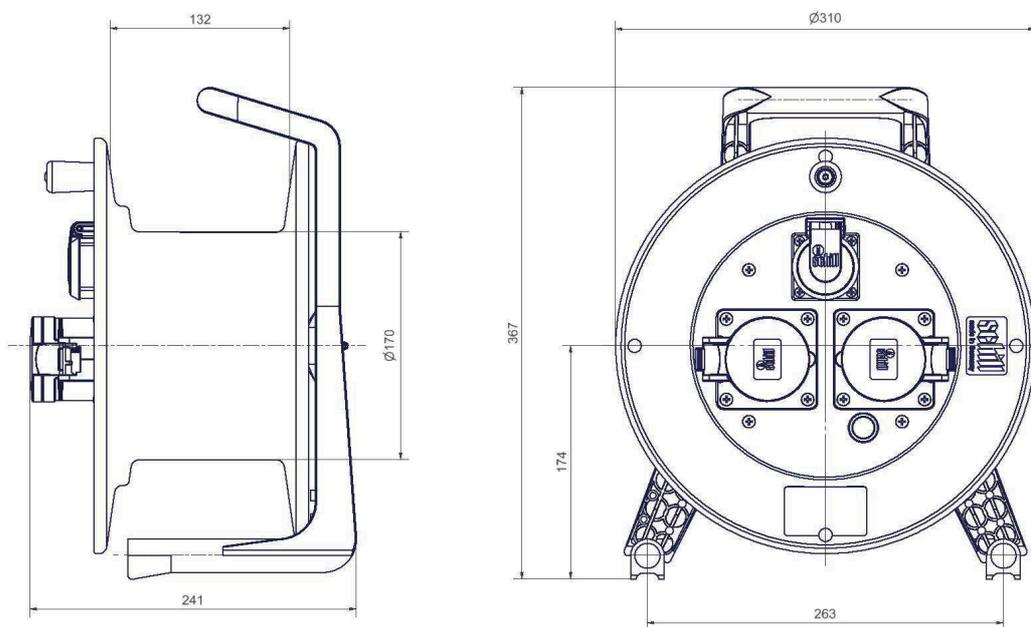


GT 310.C516MD3

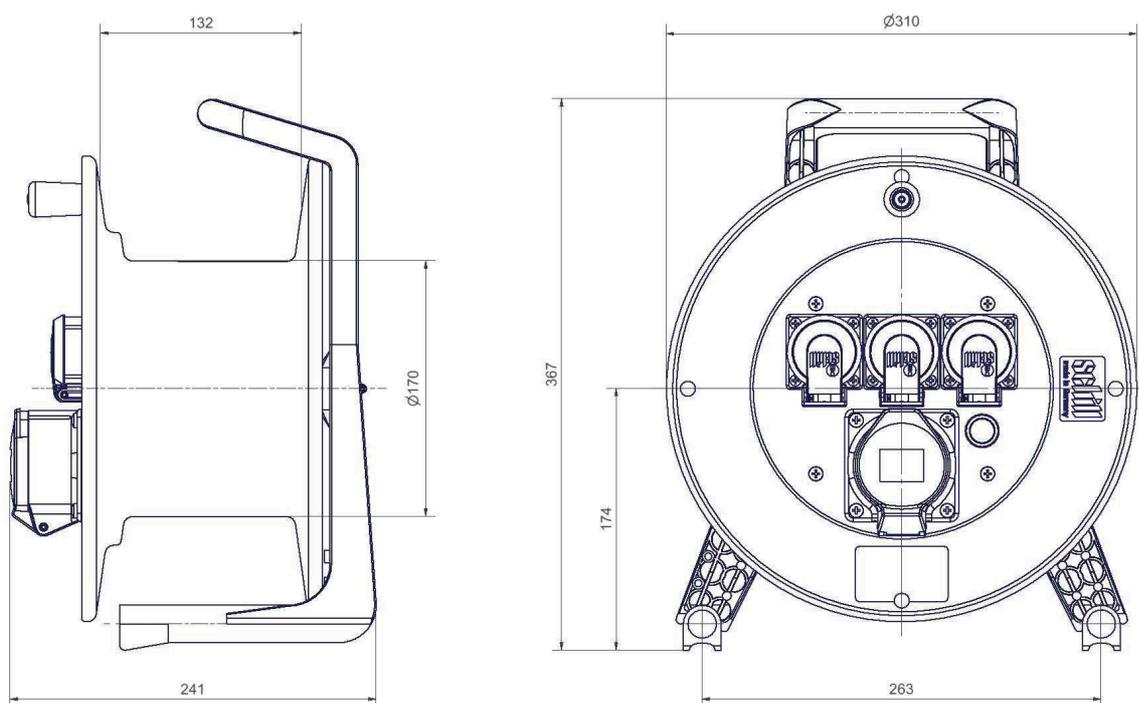


Drum dimensions

GT 310.FI.MD3

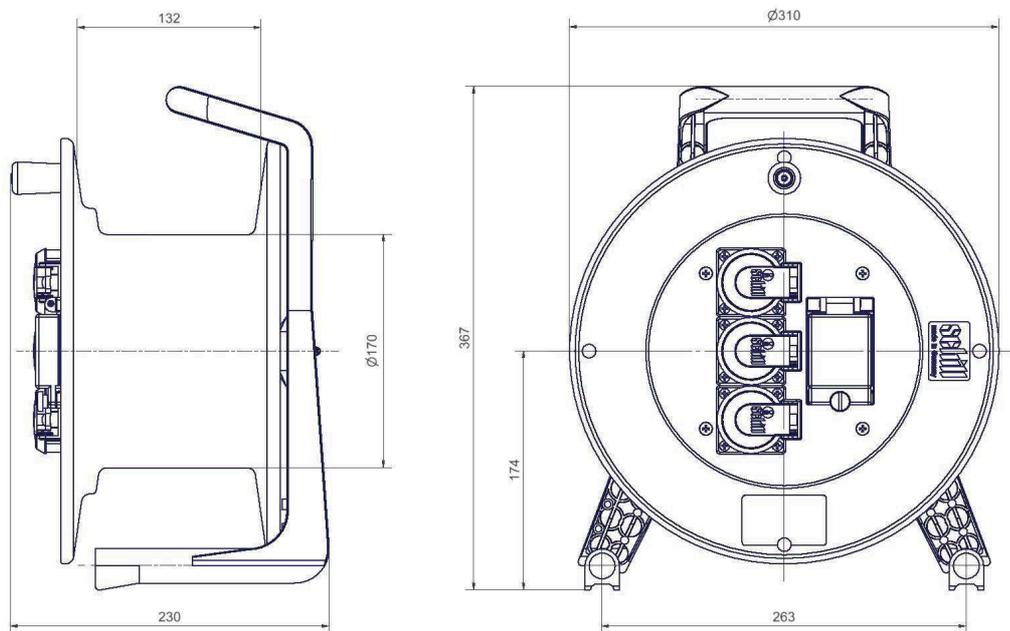


GT 310.FI.2C316

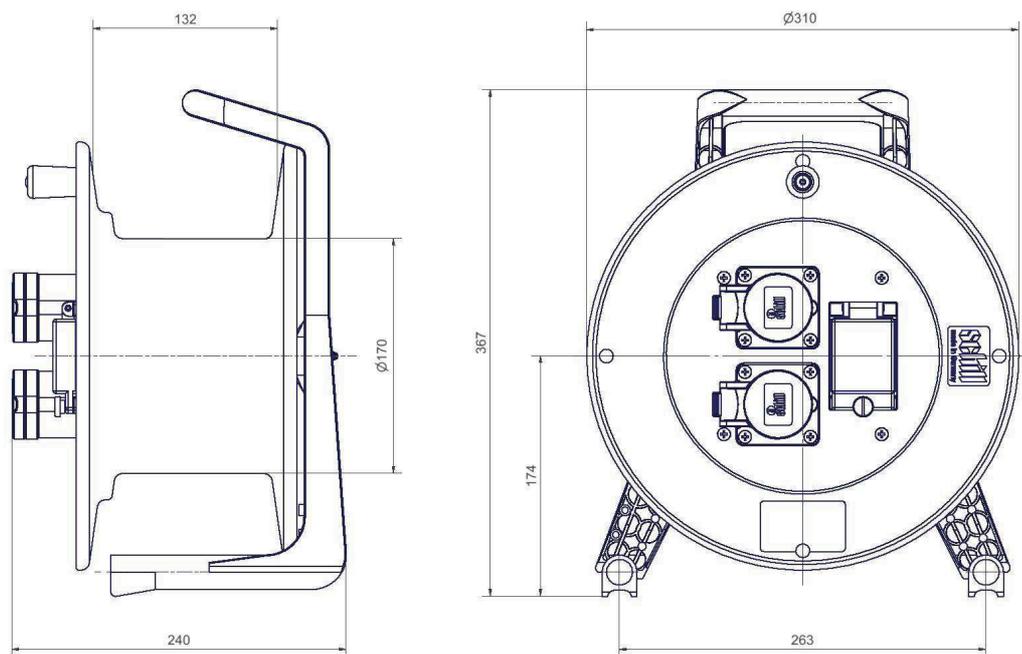


Drum dimensions

GT 310.LED.MD3

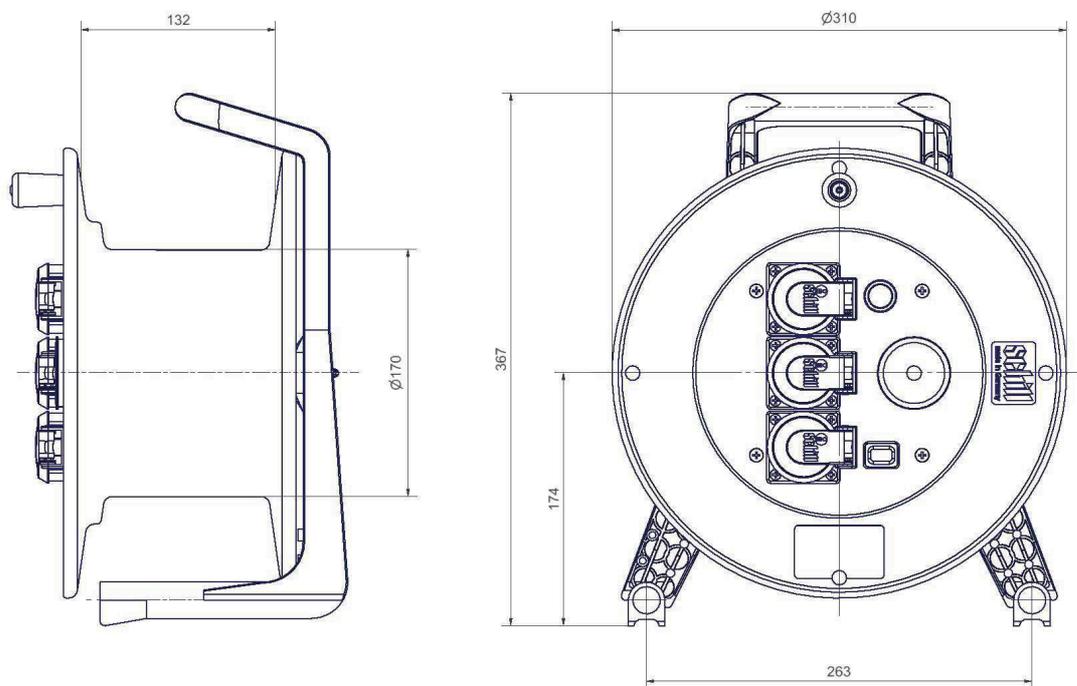


GT 310.SZ.MD3 / GT 310.SZG.MD3

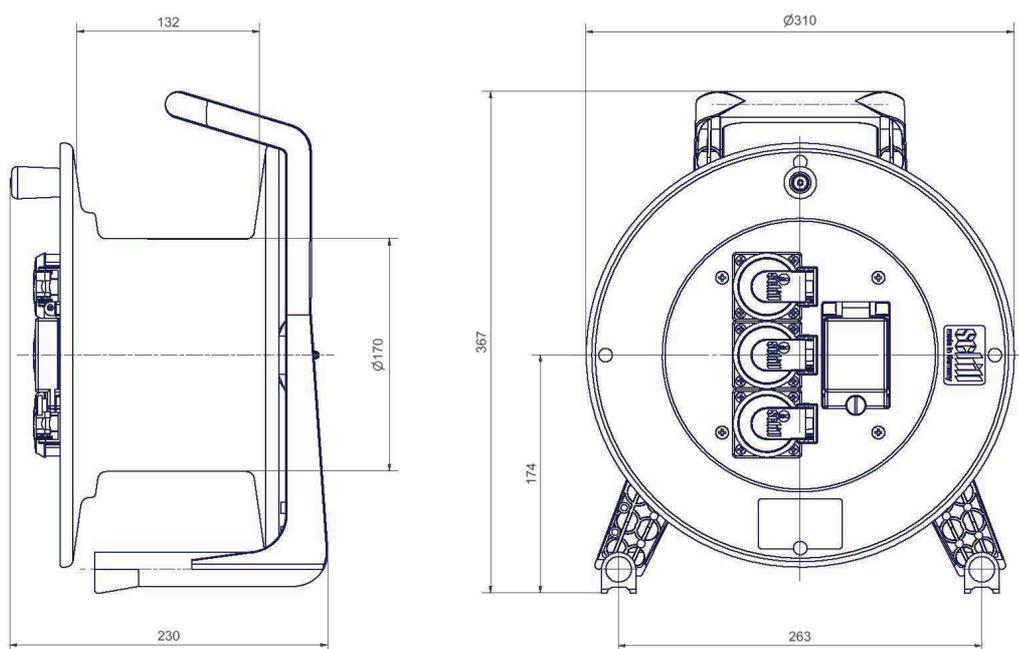


Drum dimensions

GT 310.WS1

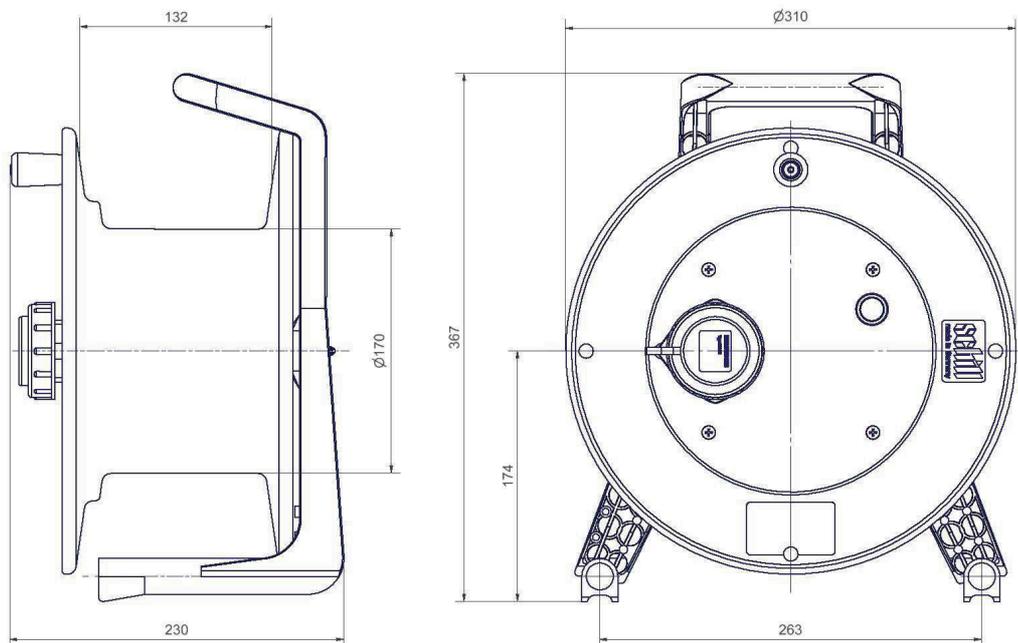


GT 310.WS3

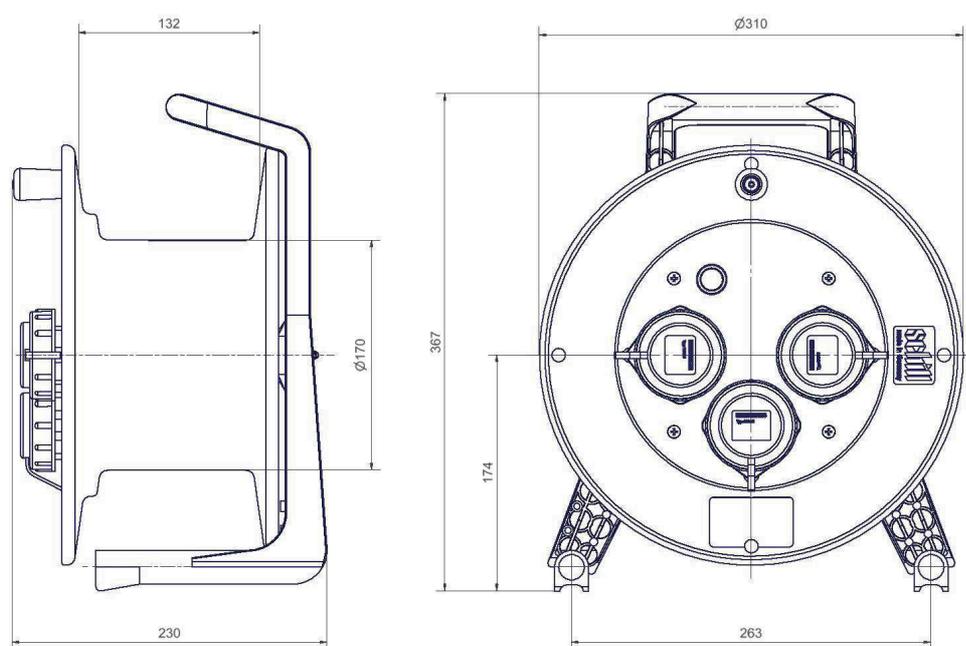


Drum dimensions

GT 310.WS3.25KS315-IP67

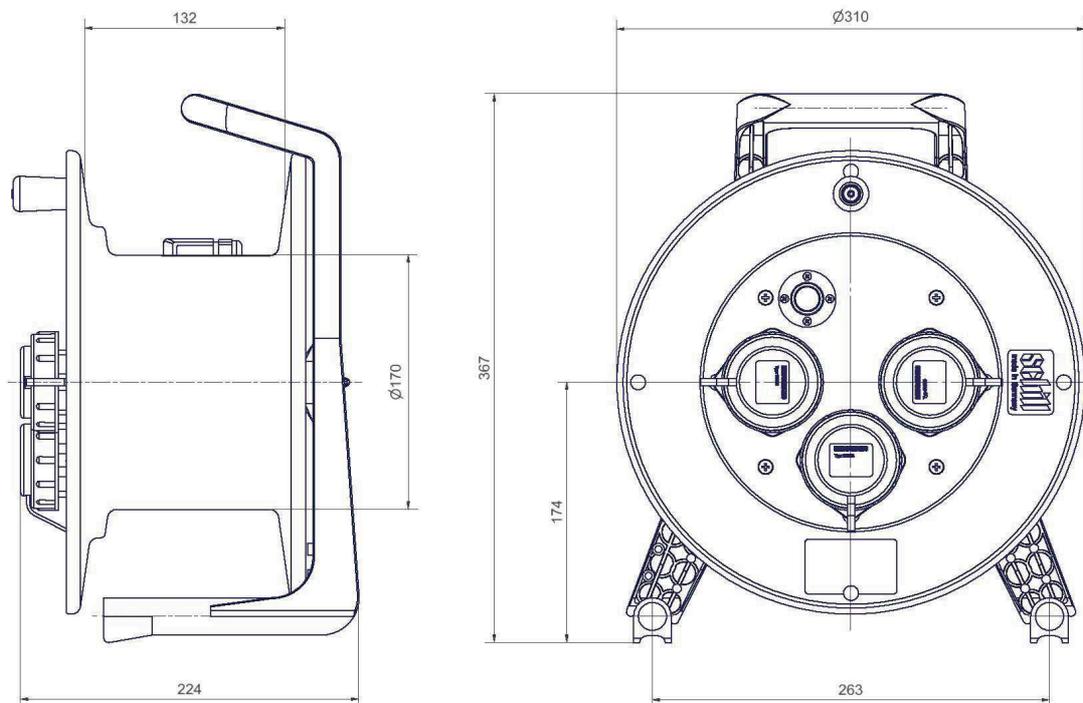


GT 310.MD4USB2

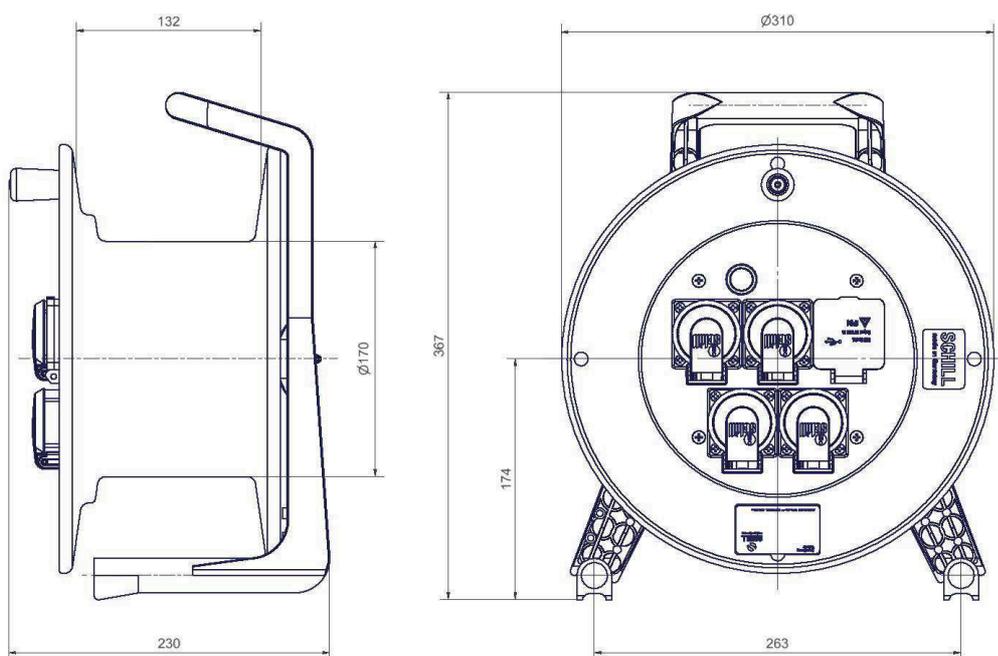


Drum dimensions

GT 310.MD4L.25KS315-PRCDS

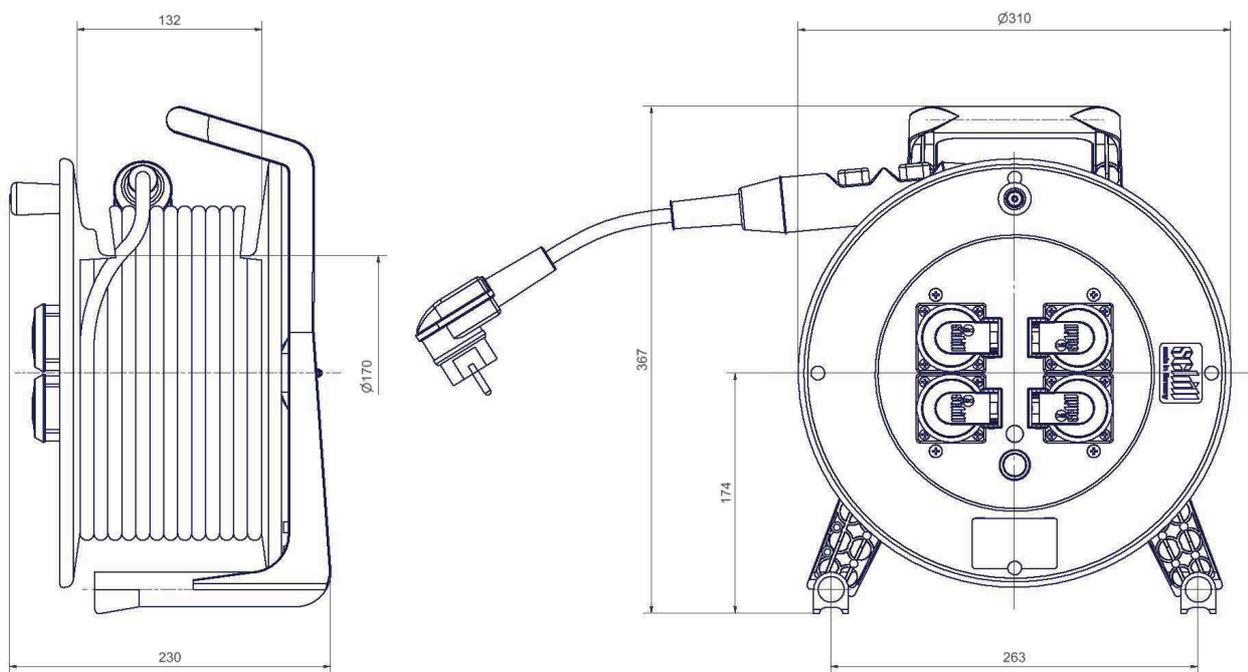


GT 380.MD6

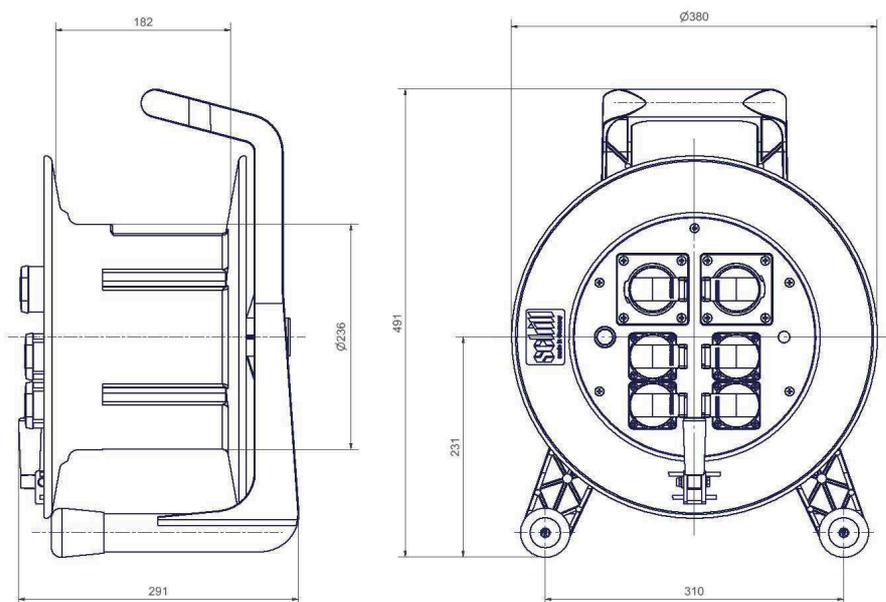


Drum dimensions

GT 380.MD6L

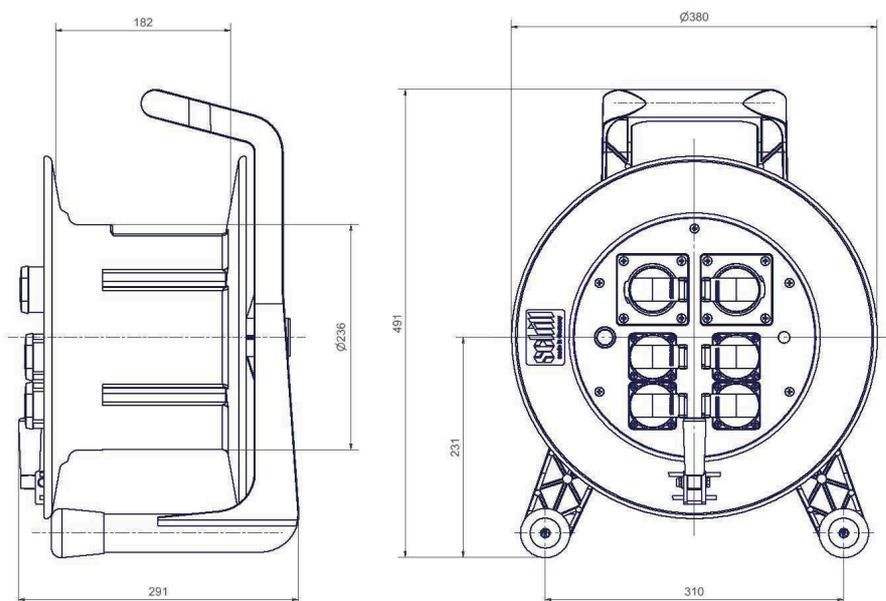


GT 380.2C516MD4

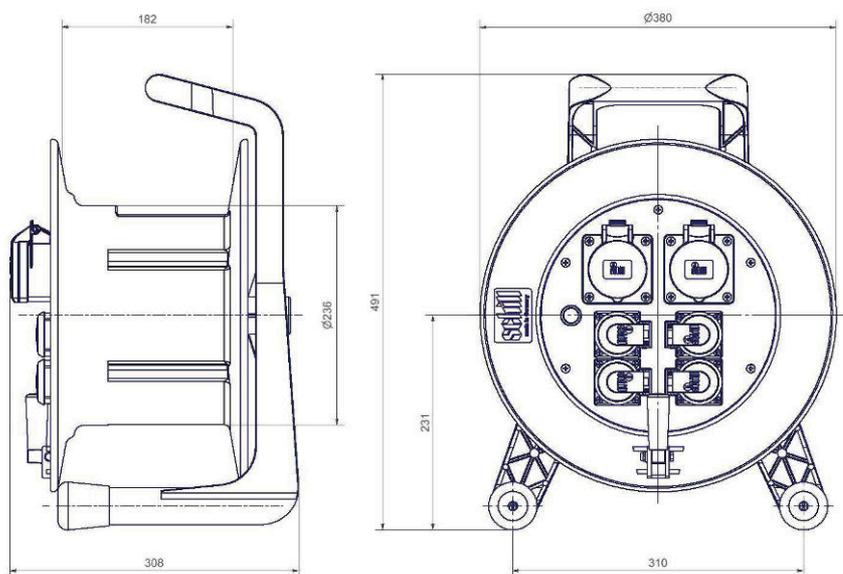


Drum dimensions

GT 380.C532C516MD2

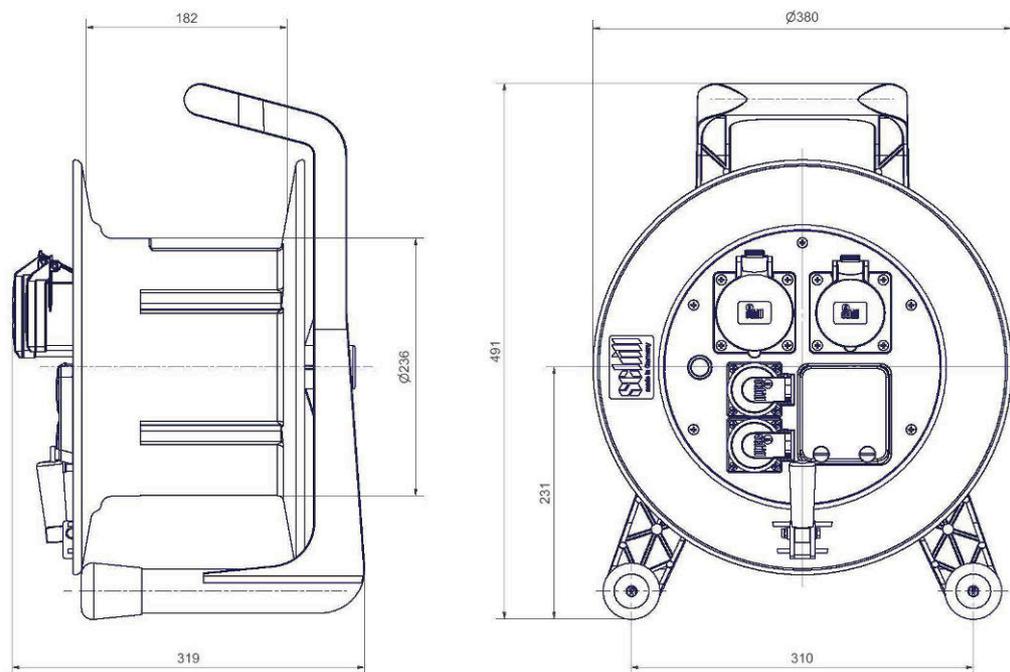


GT 380.2CW516WS2

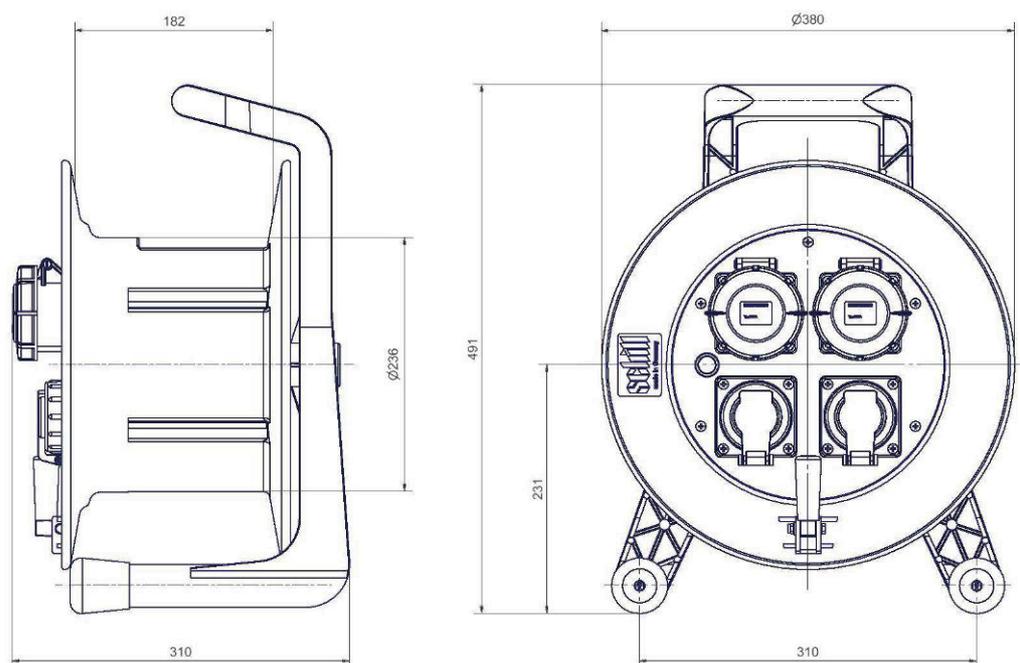


Drum dimensions

GT 380.WS4

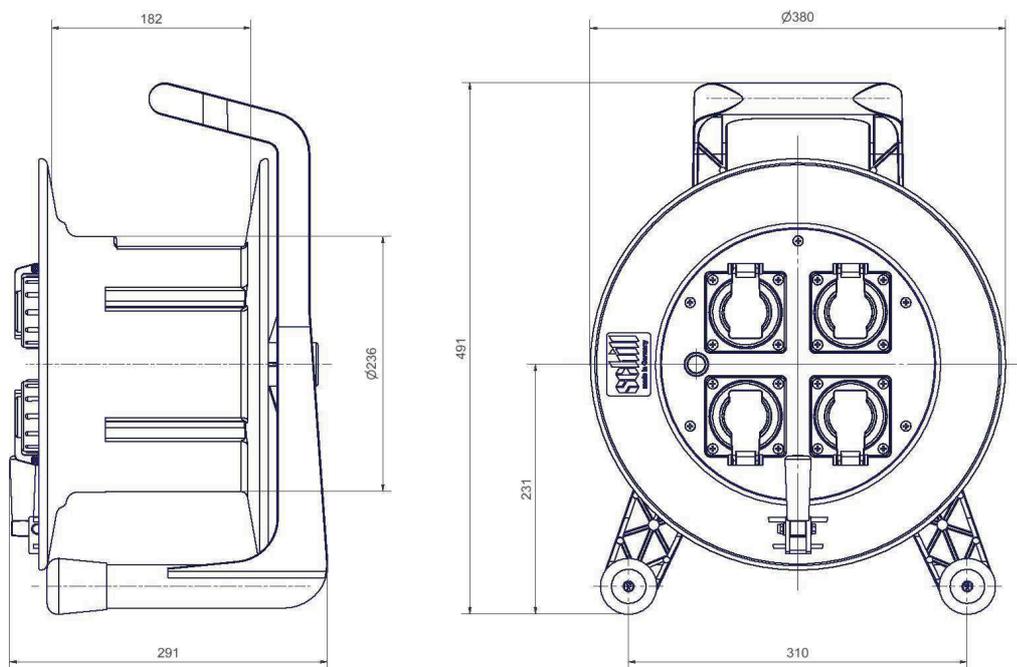


GT 450.MD5

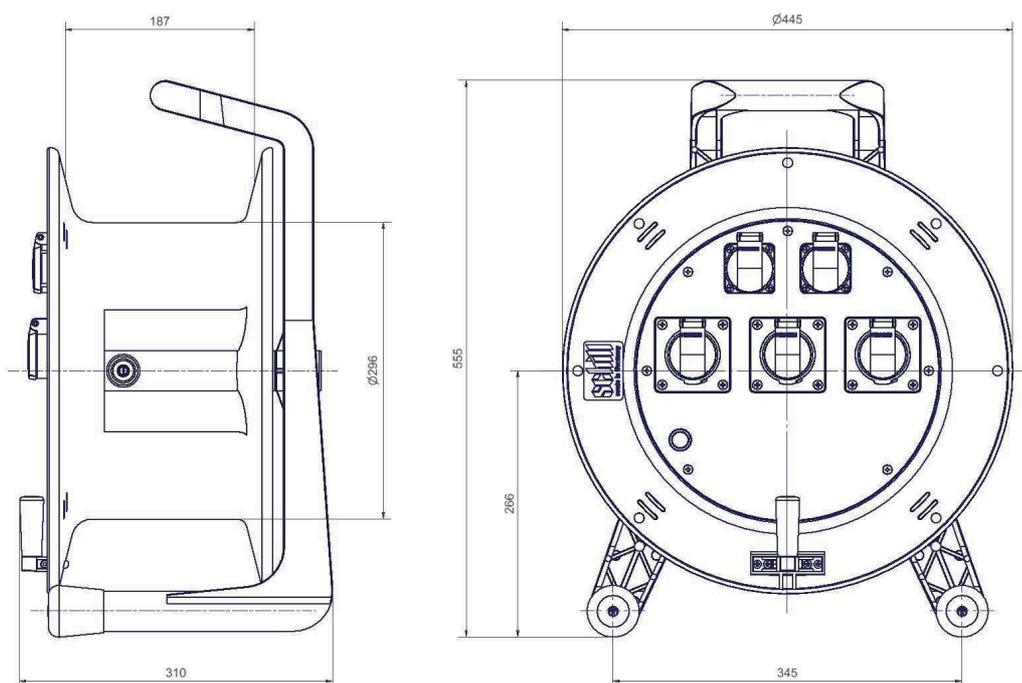


Drum dimensions

GT 450.516

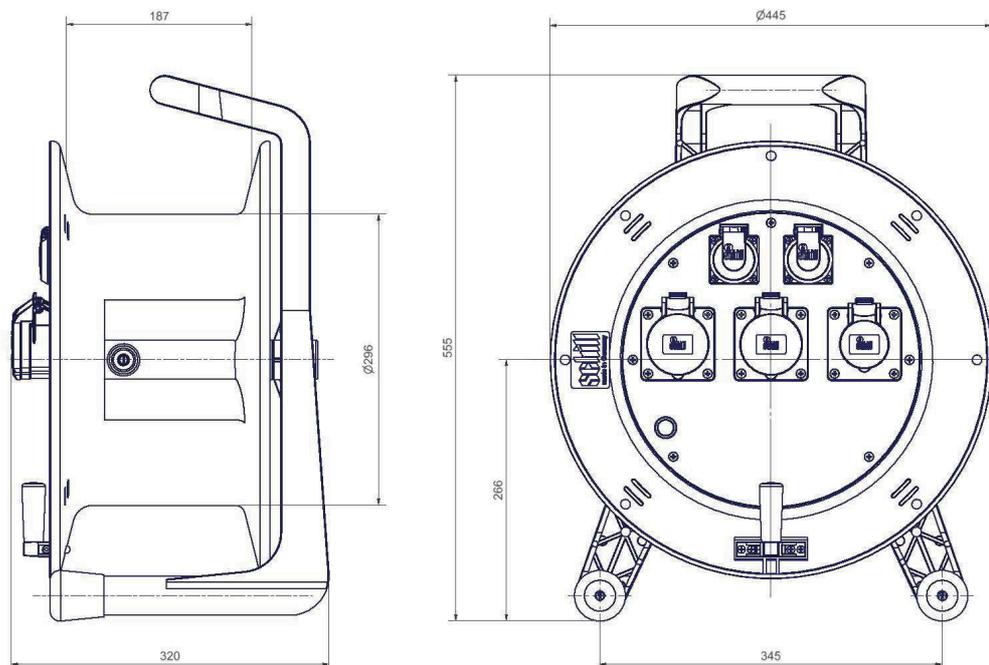


GT 450.532

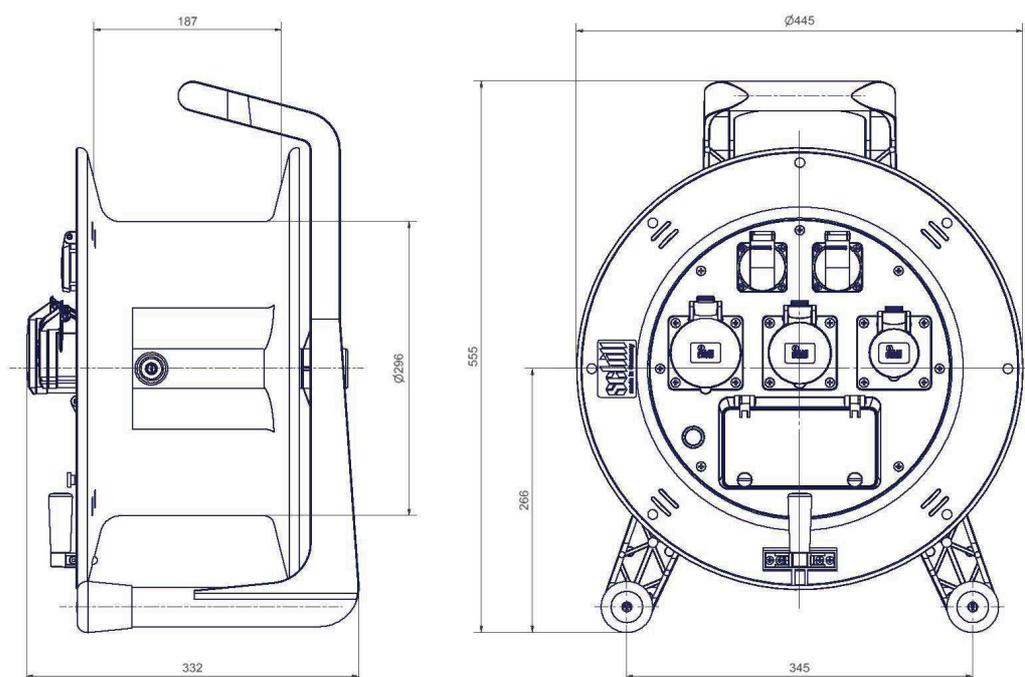


Drum dimensions

GT 450.FI.MD5

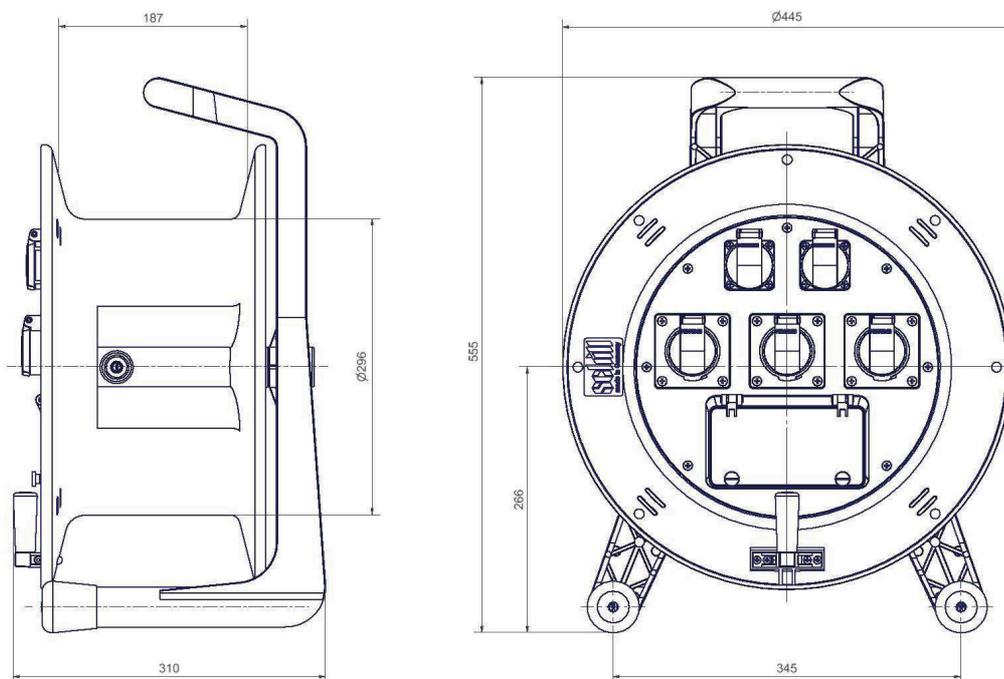


GT 450.FI.516

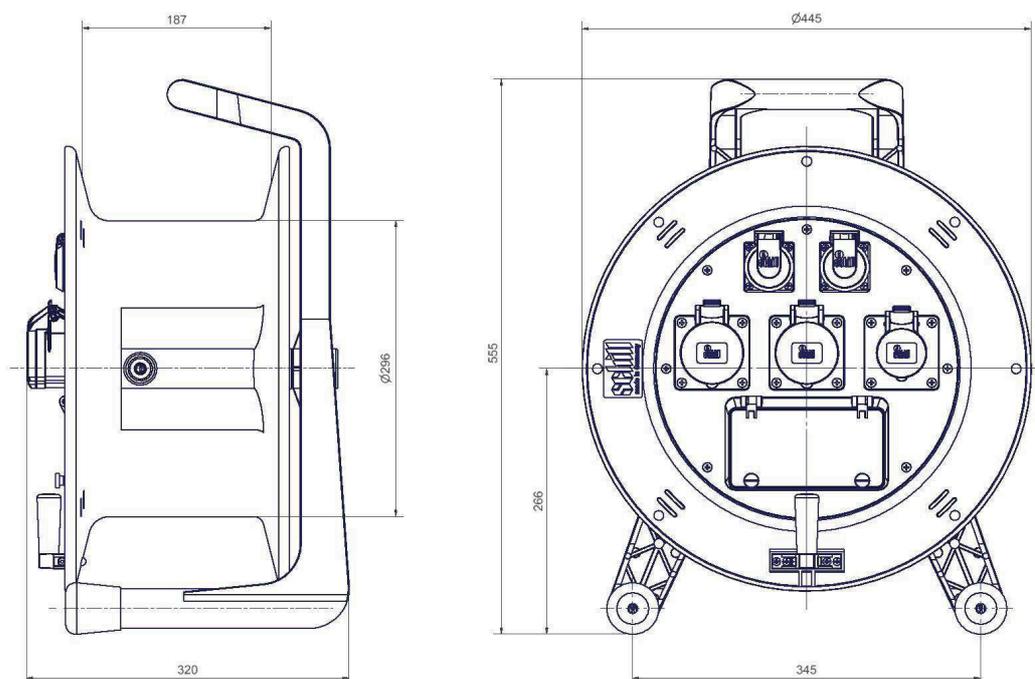


Drum dimensions

GT 450.FI.532

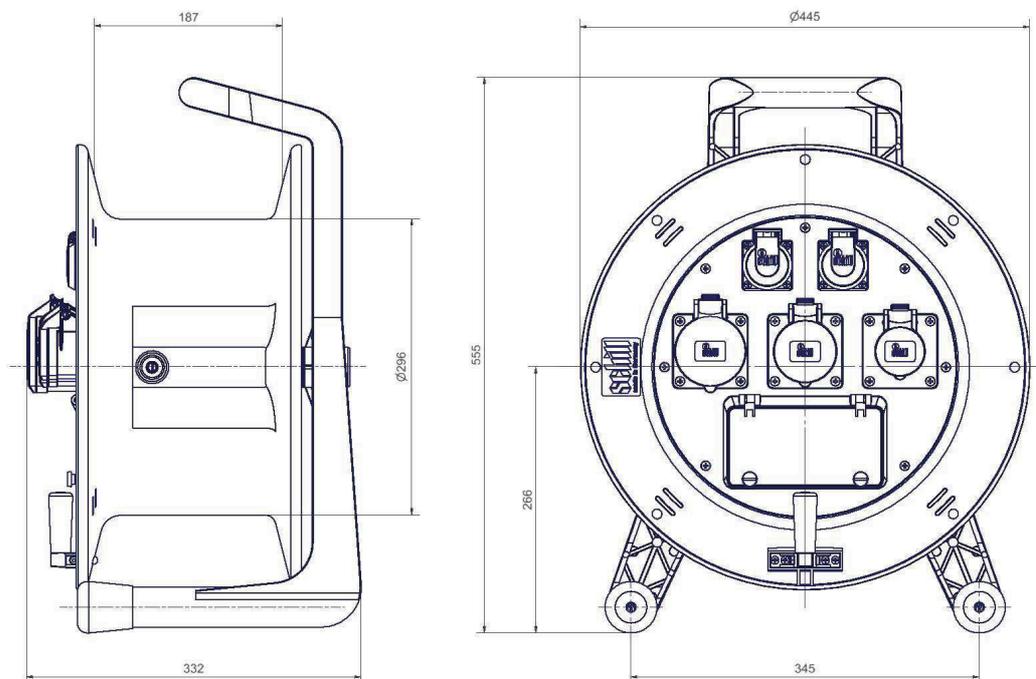


GT 450.FID.516

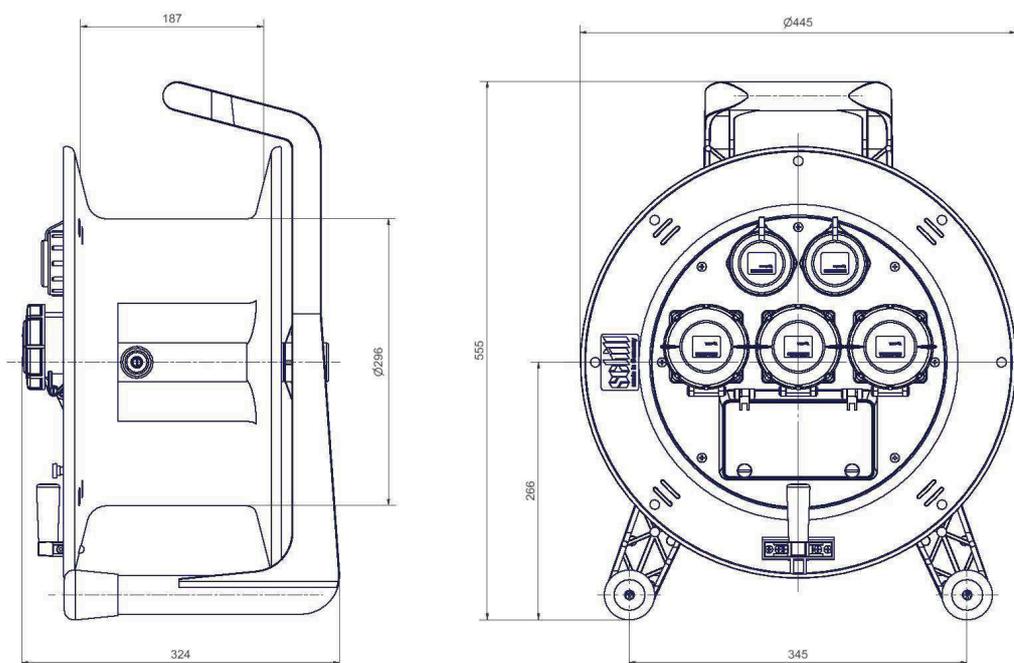


Drum dimensions

GT 450.FID.532

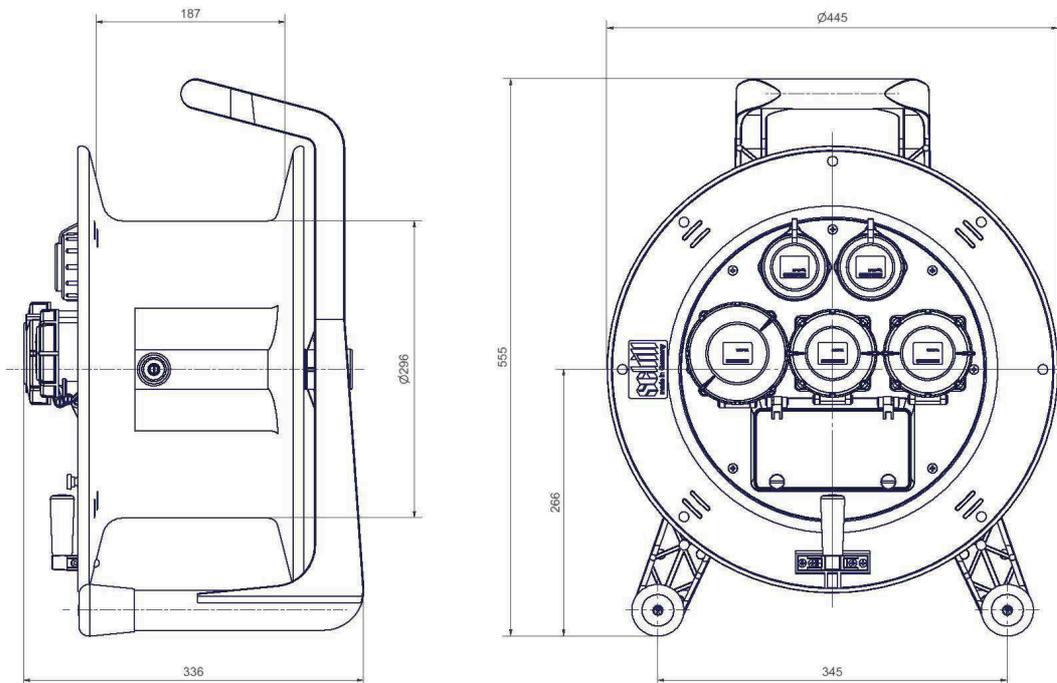


GT 450.MS3+GT 450.MS5

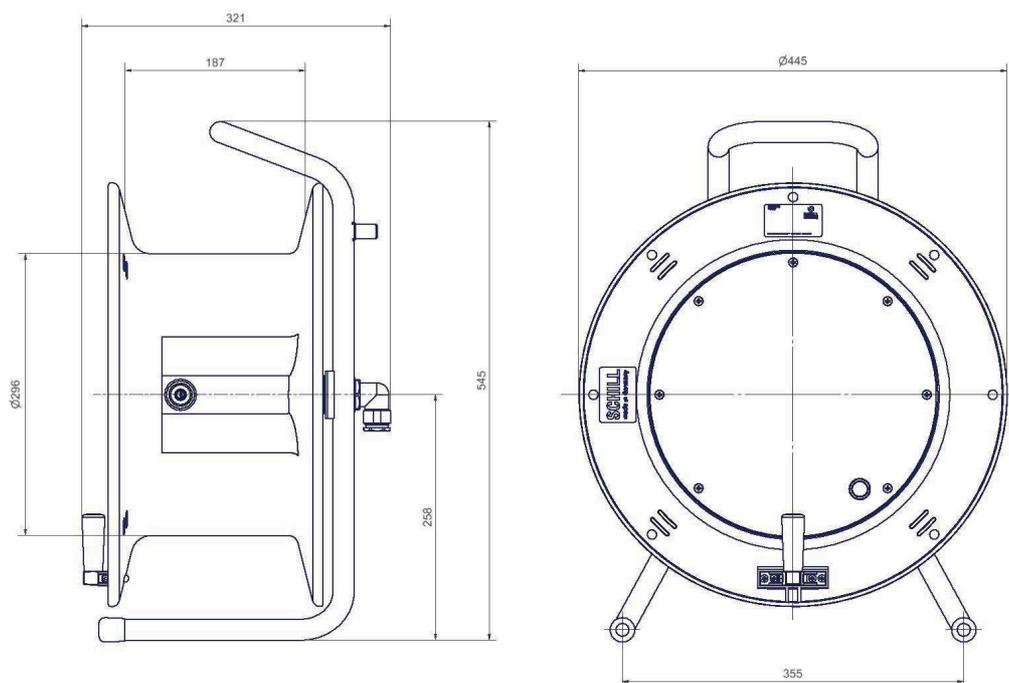


Drum dimensions

HT 280.S4

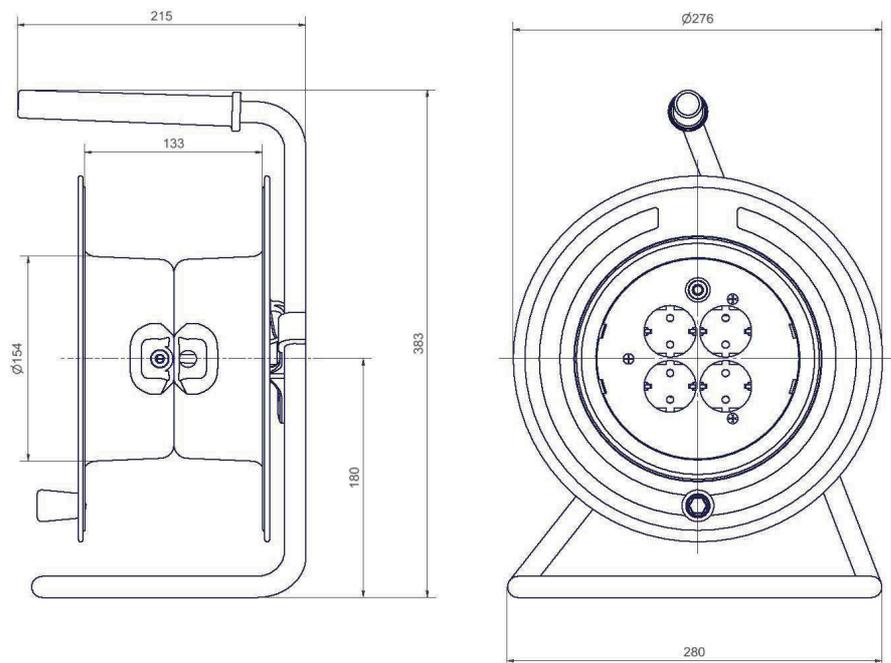


HT 280.TS4

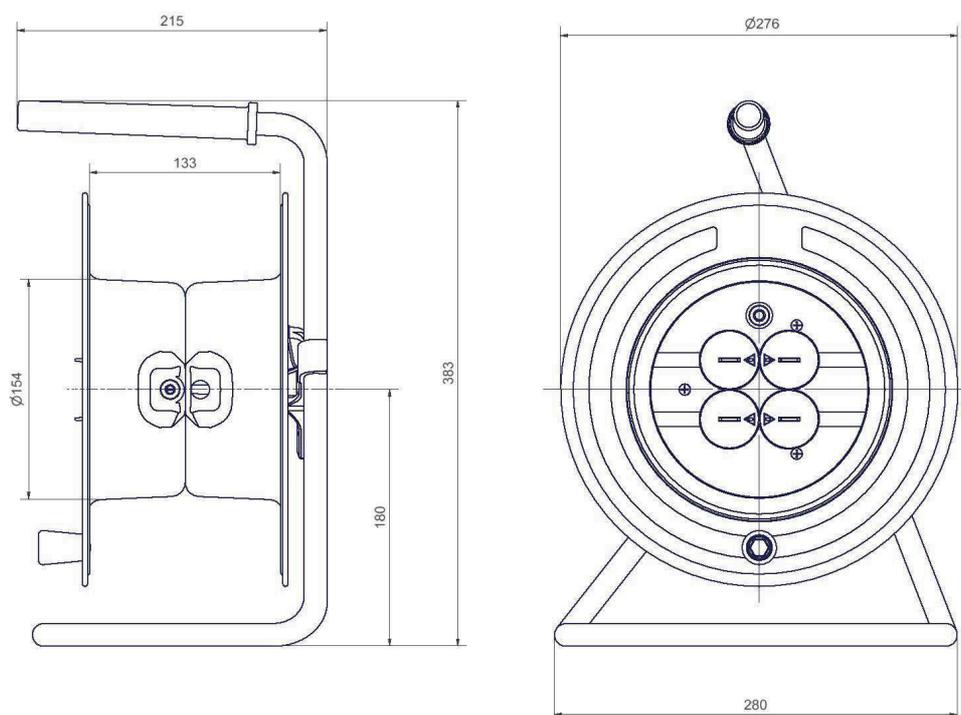


Drum dimensions

HT 300K.C316MD3

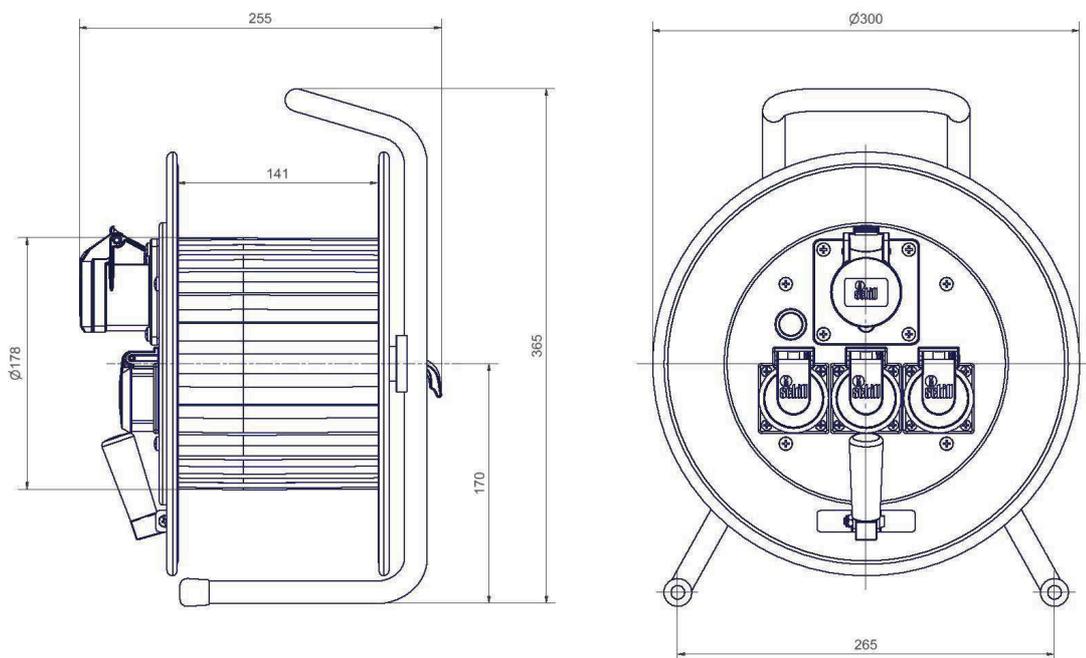


HT 300K.3C516

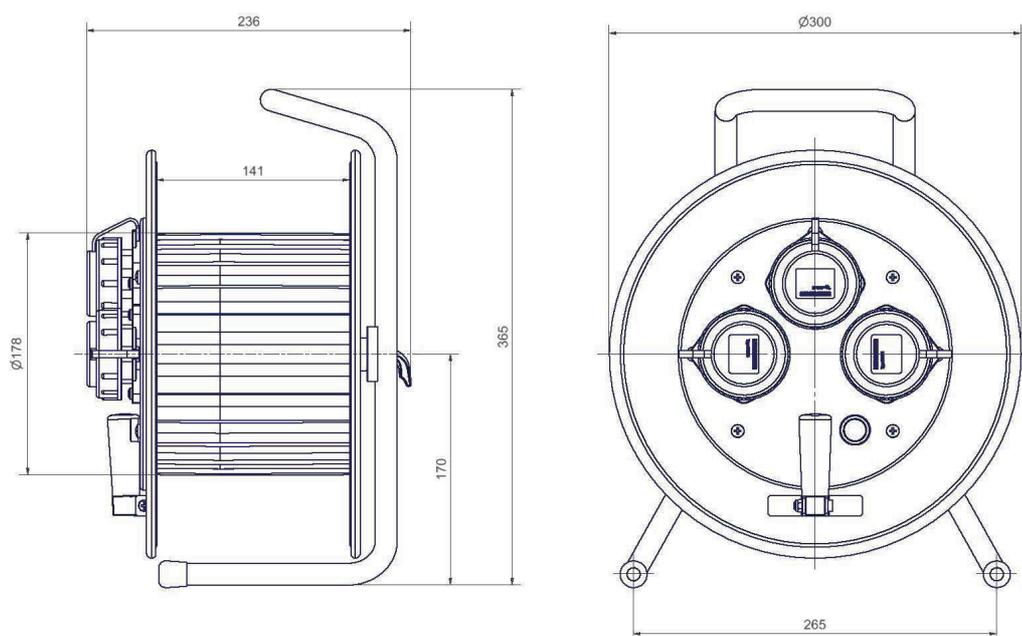


Drum dimensions

HT 300K.WS3

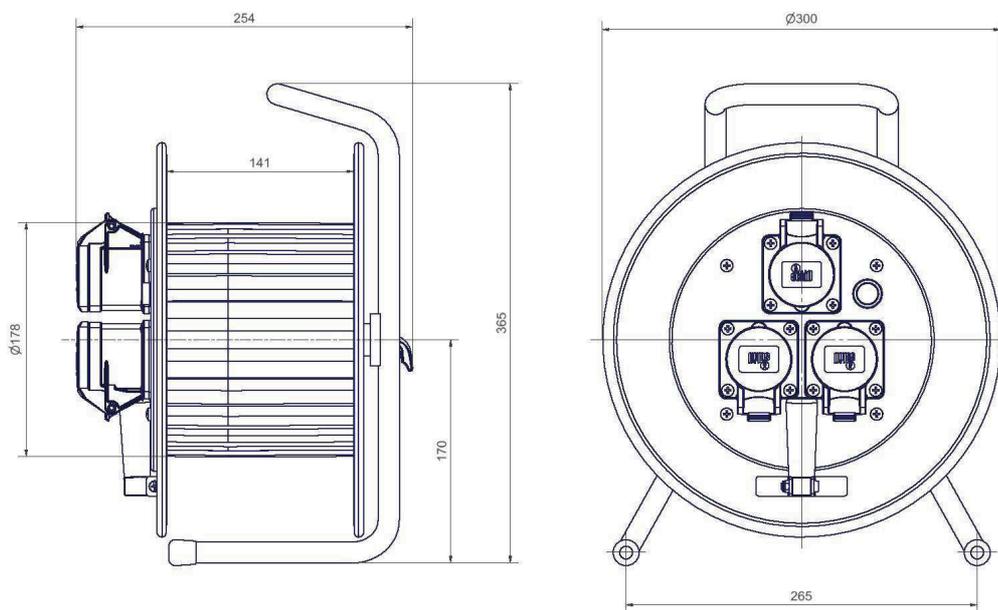


HT 305.MD4

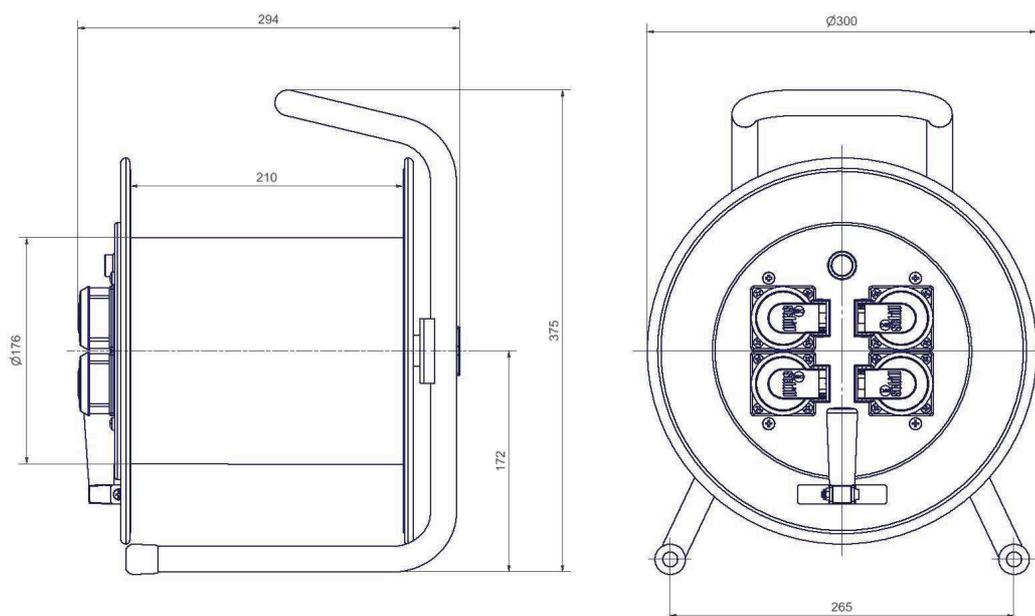


Drum dimensions

HT 305.MD4L

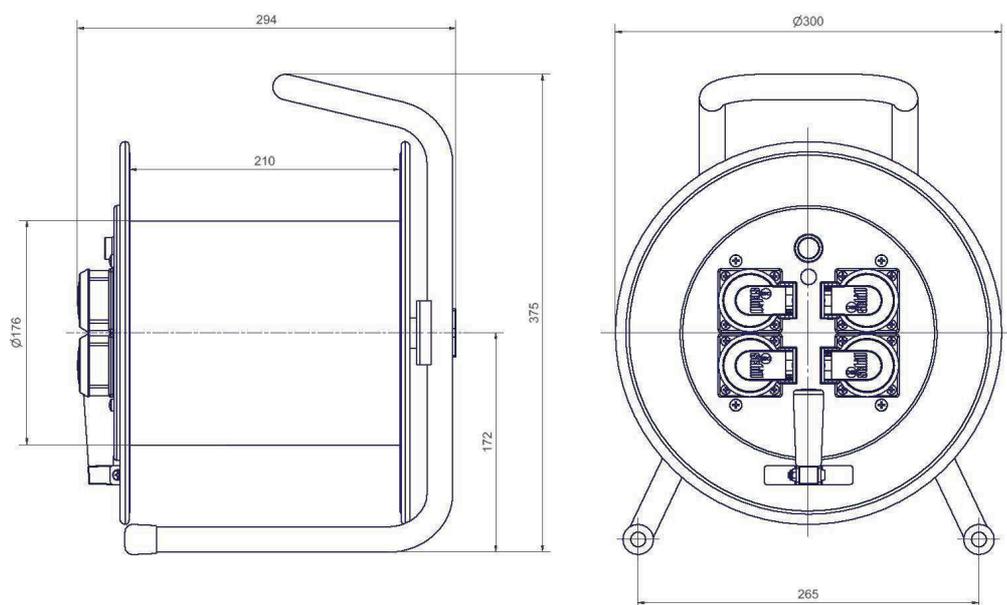


HT 305.MD5

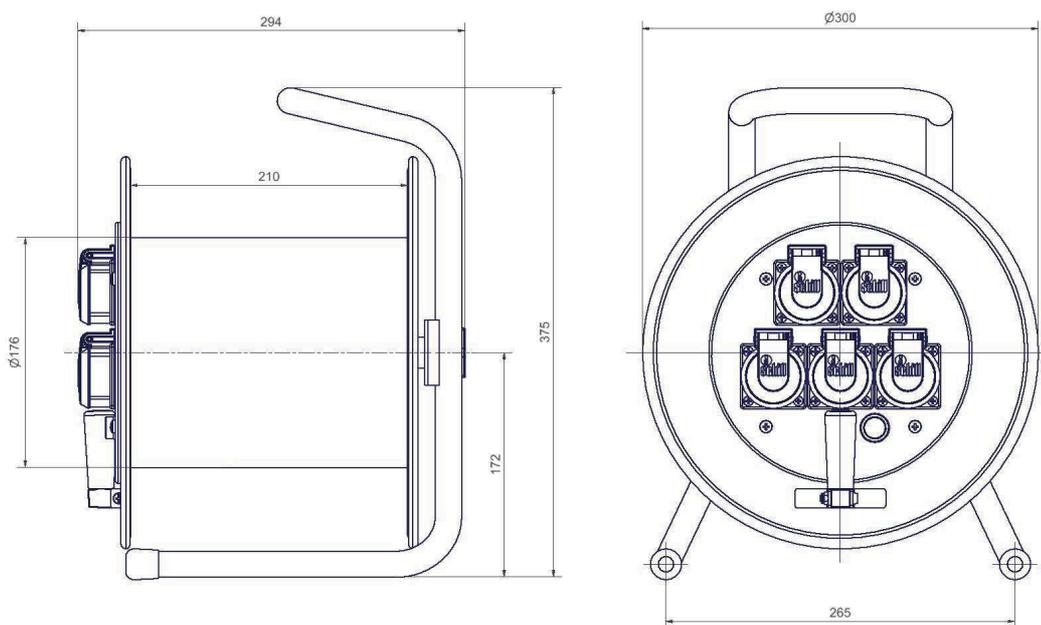


Drum dimensions

HT 305.MD5L

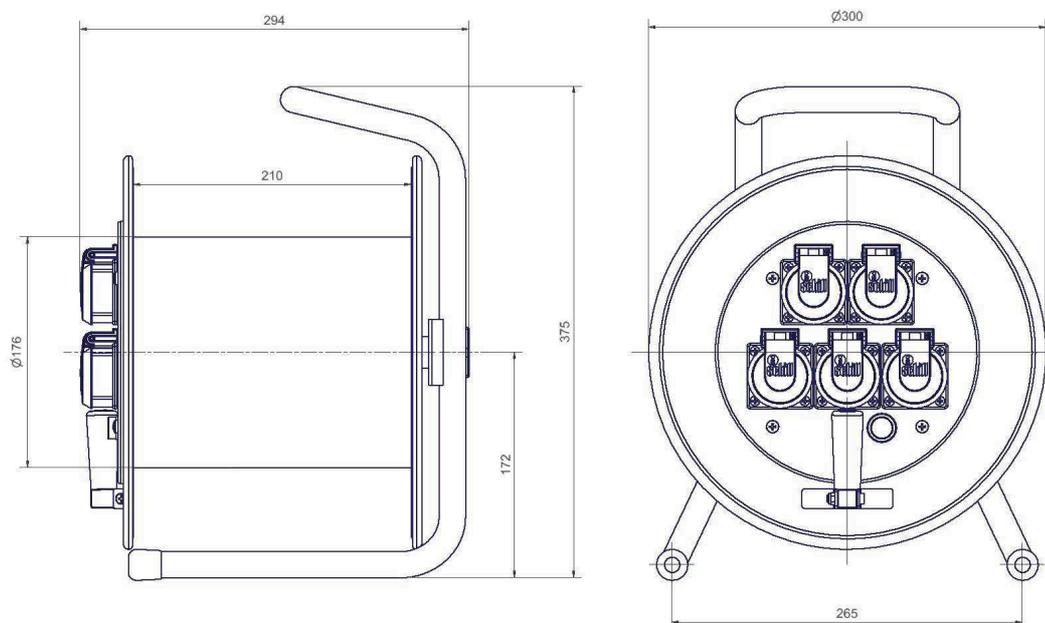


HT 305.2C516MD1

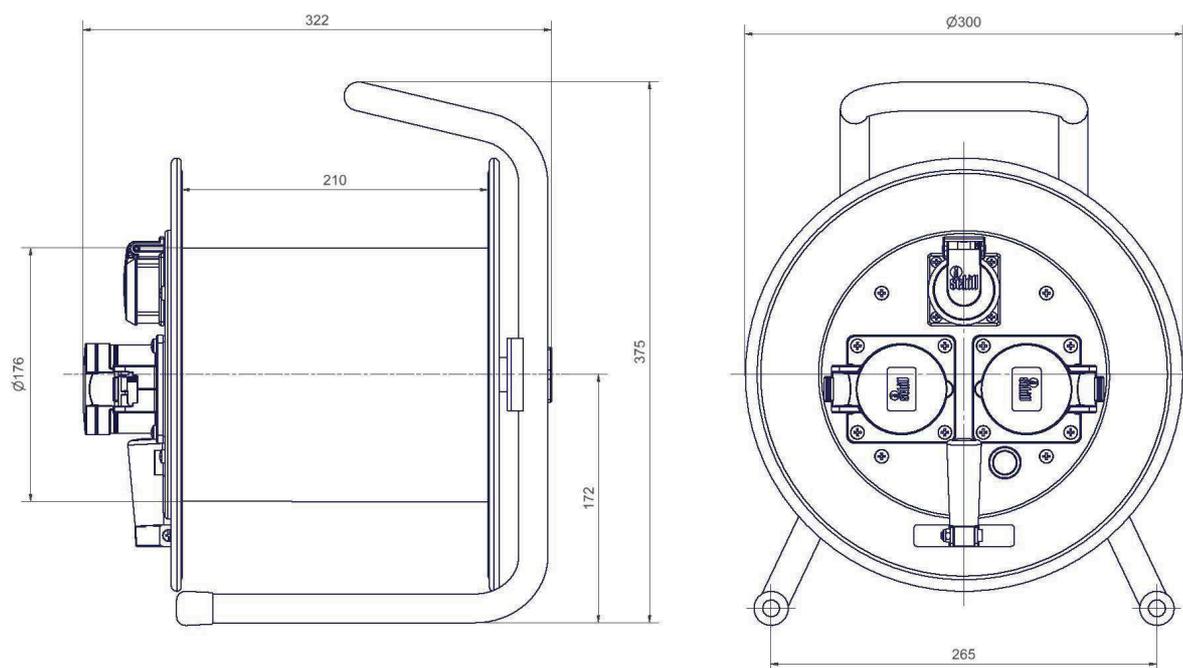


Drum dimensions

HT 305.C516MD3

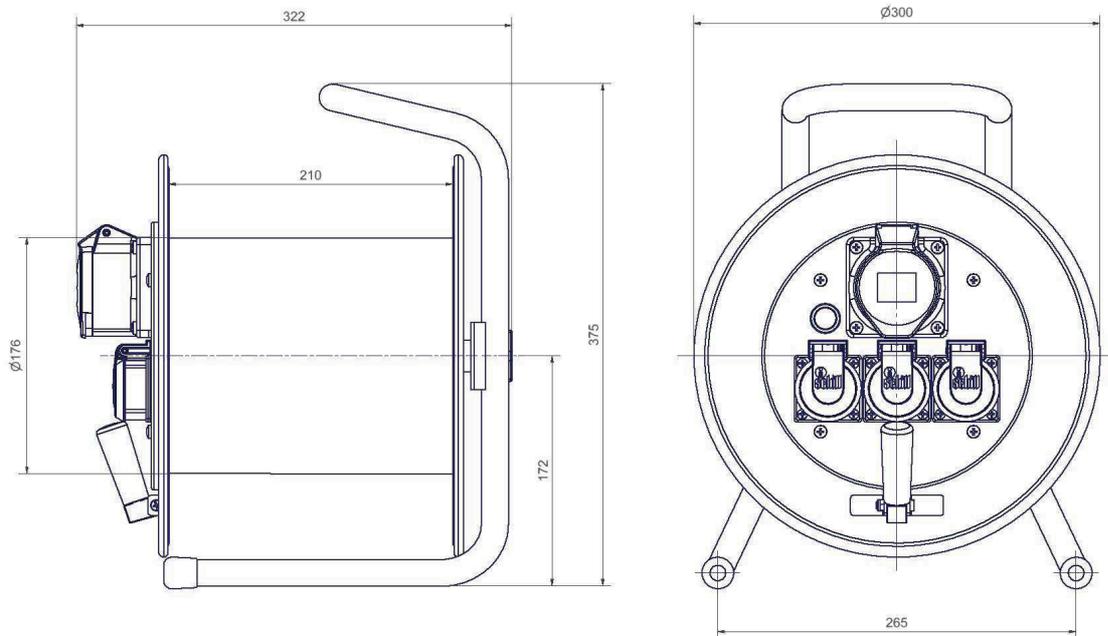


HT 311.MD3

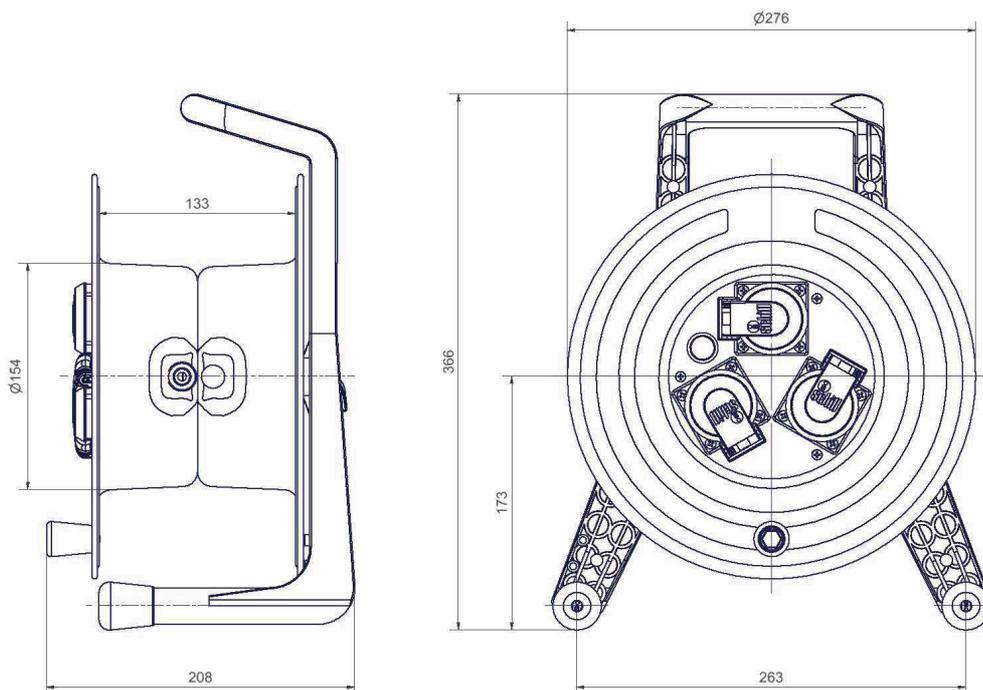


Drum dimensions

HT 380.MD4

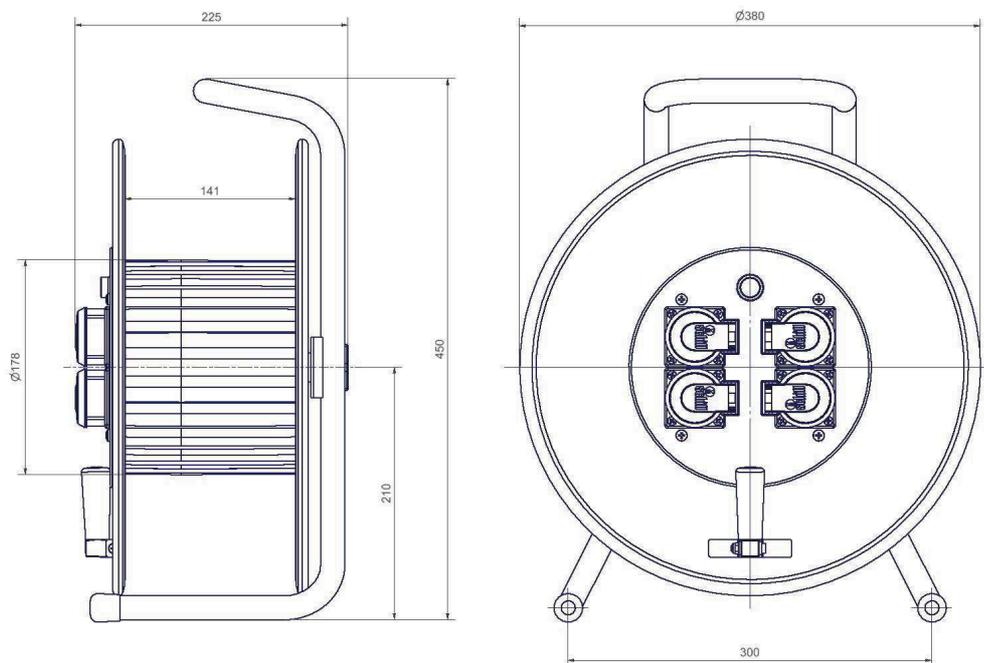


HT 380.MD4L

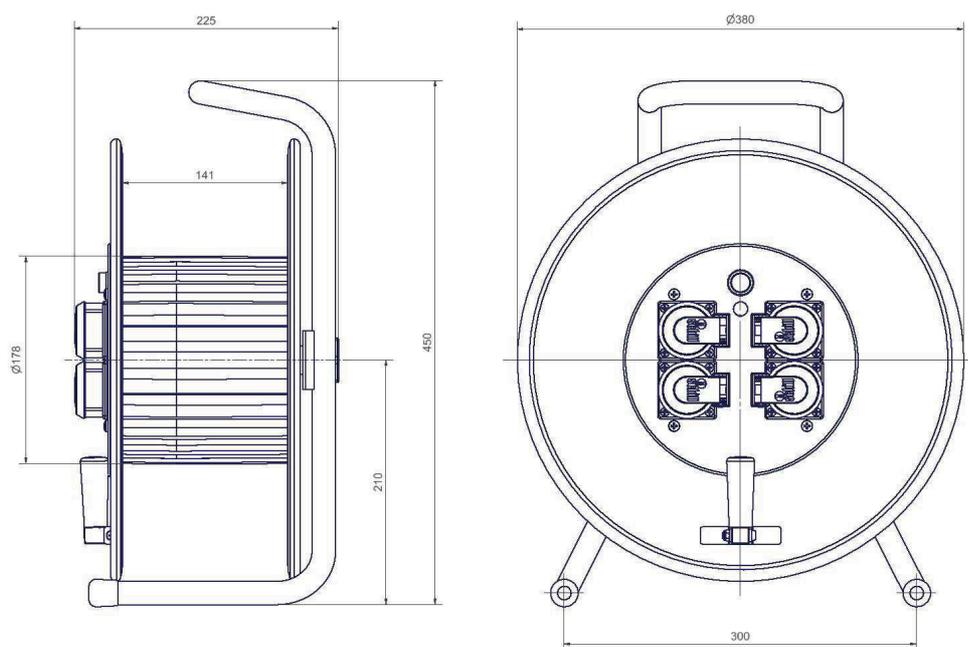


Drum dimensions

HT 380.MD5

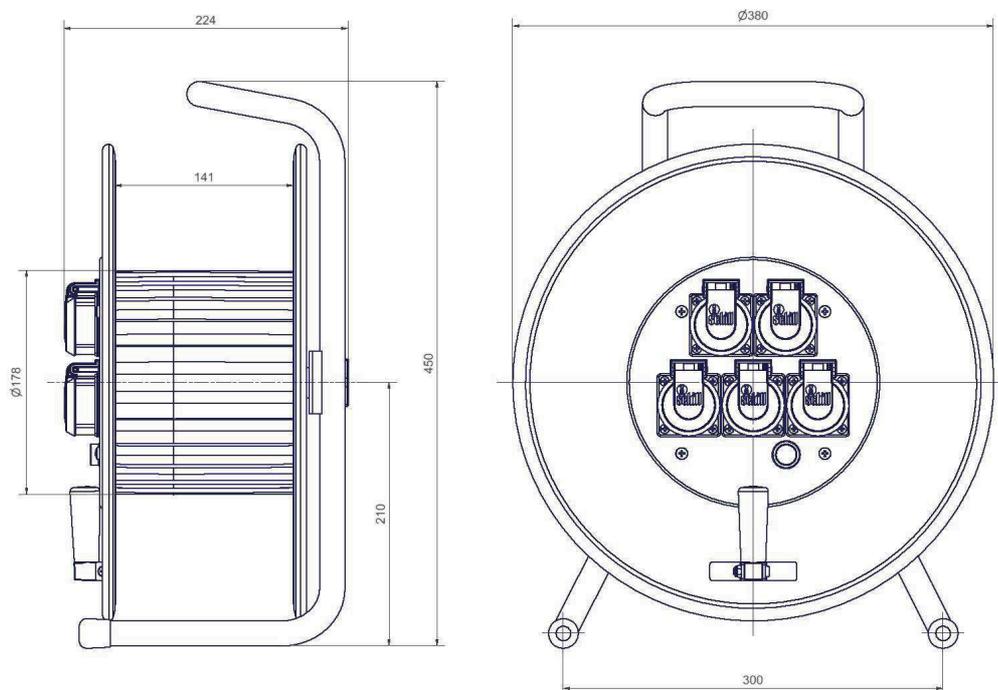


HT 380.MD5L

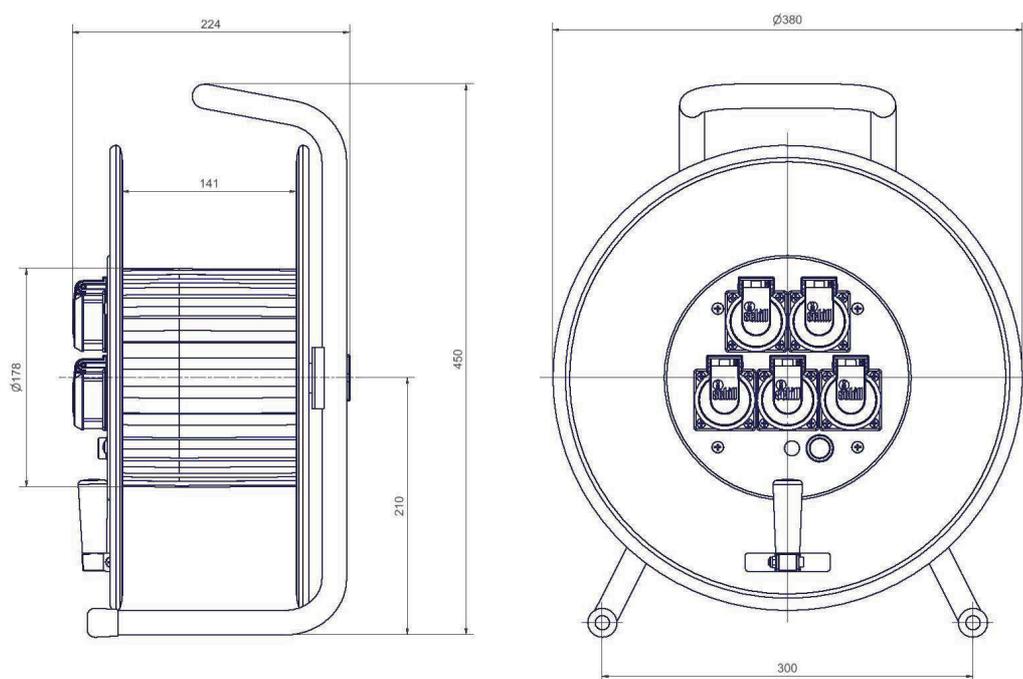


Drum dimensions

HT 380.2C516

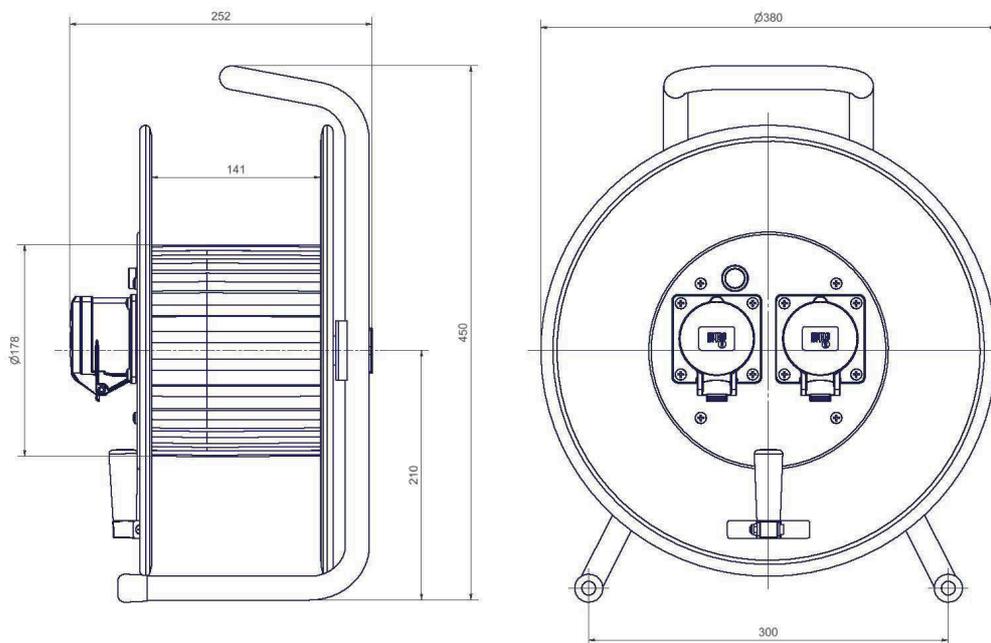


HT 380.2C516MD1

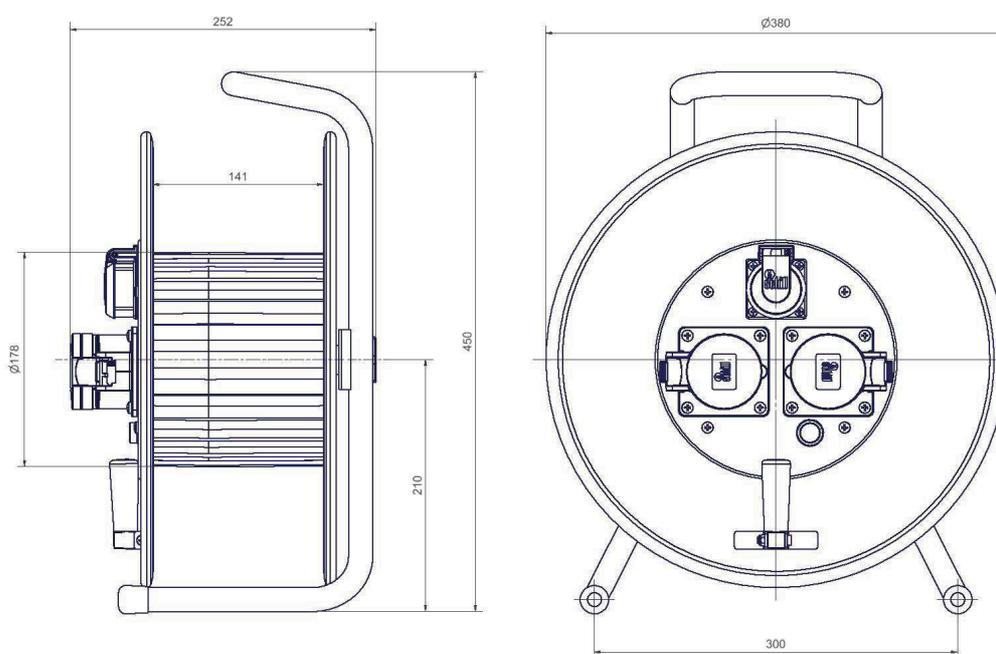


Drum dimensions

HT 380.C516MD3


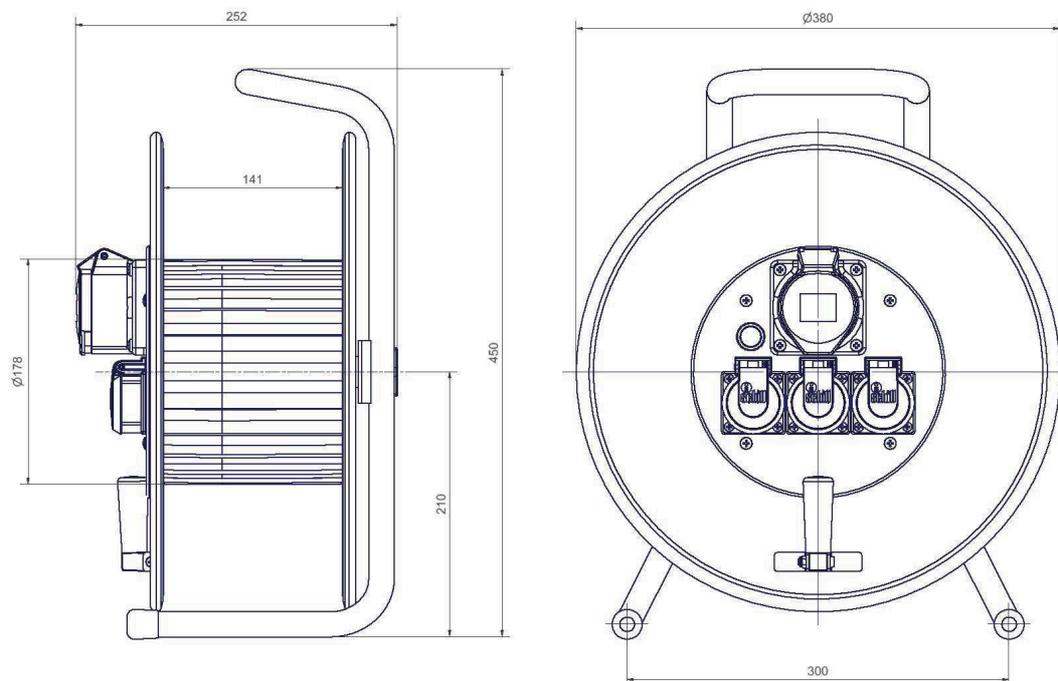


HT 380.WS3


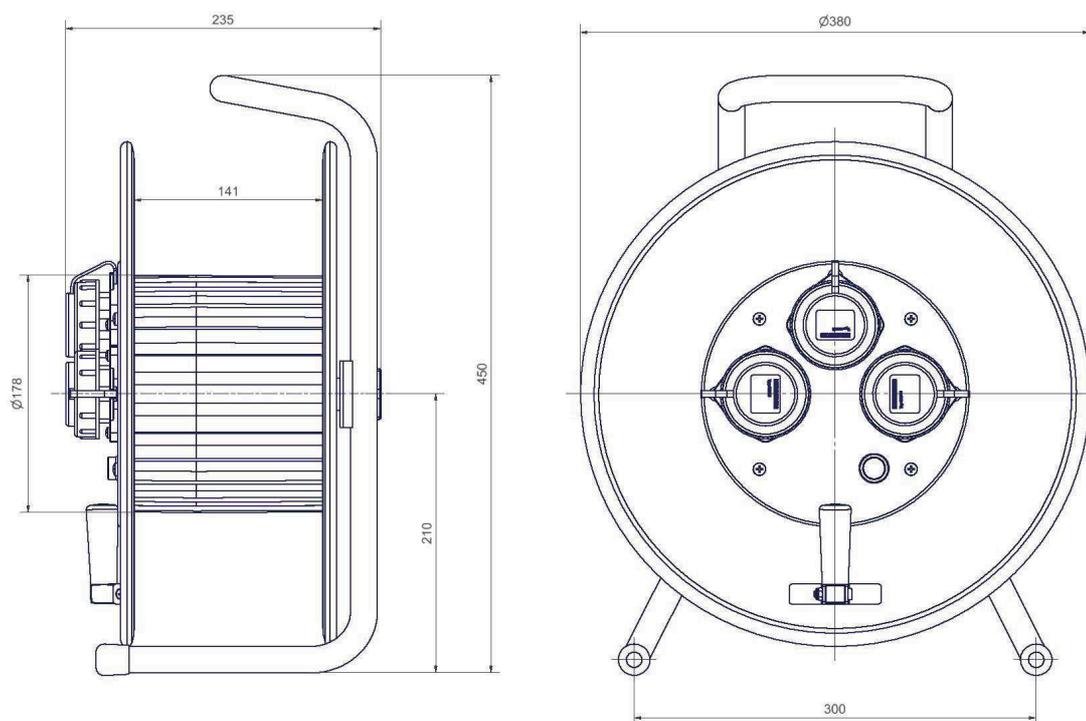


Drum dimensions

HT 381.2C532

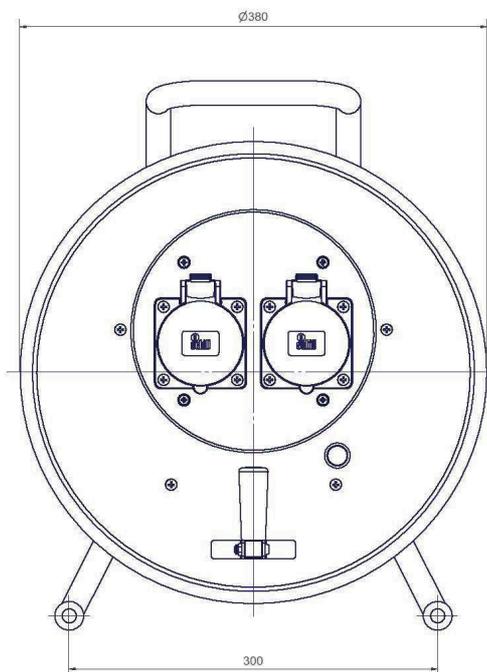
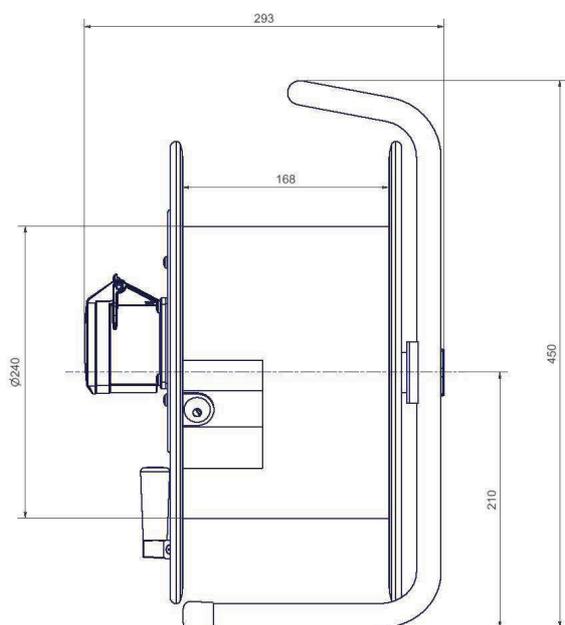


HT 381.2C532MD1

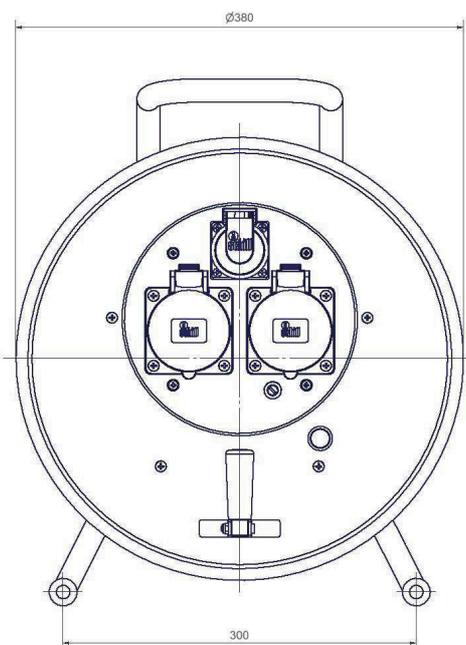
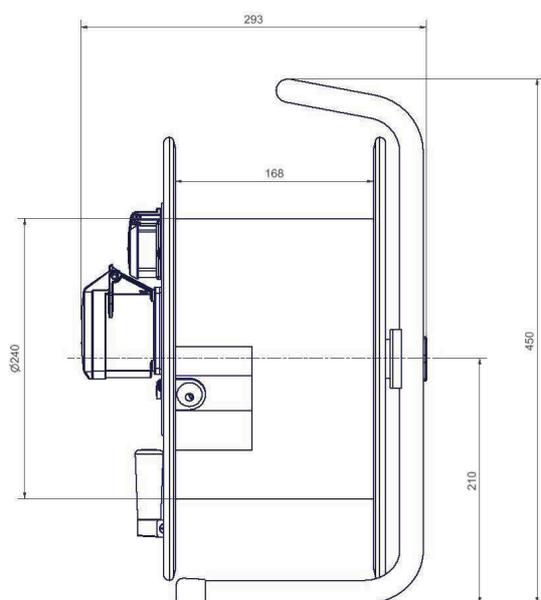


Drum dimensions

HT 381.C532C516MD1

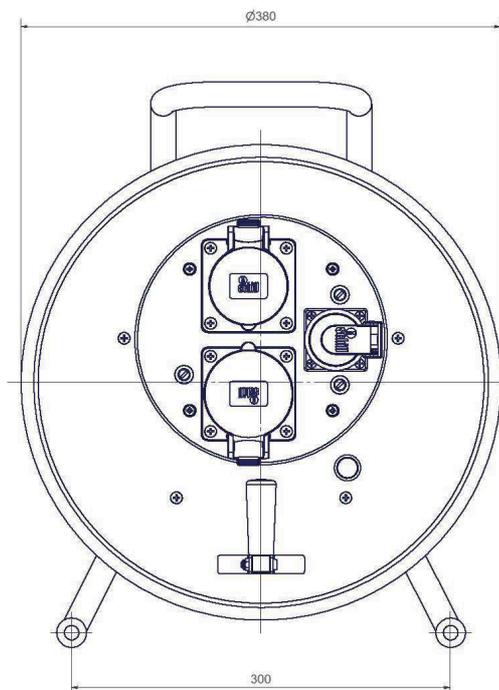
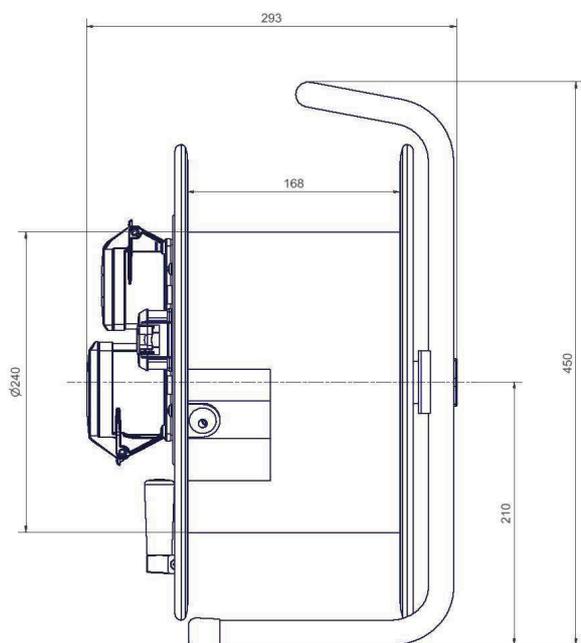


HT 381.C532MD2

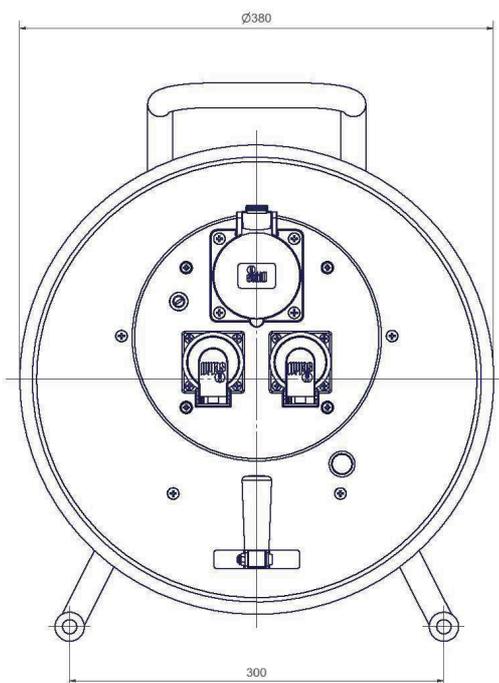
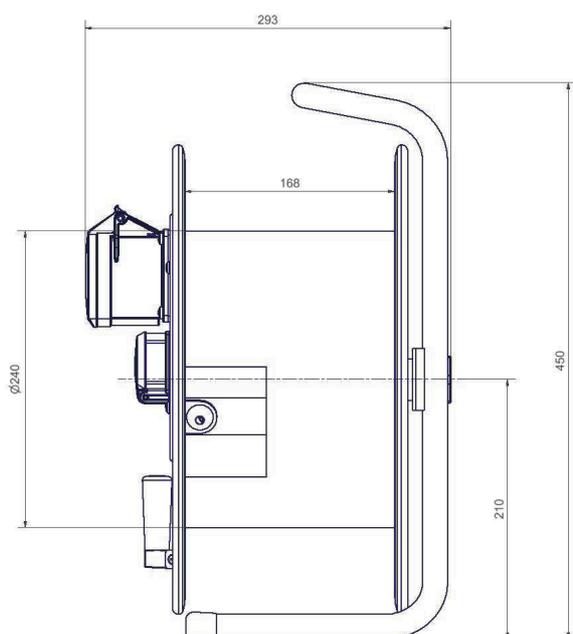


Drum dimensions

HT 381.FI.MD3+HT 381.FI.MD3B

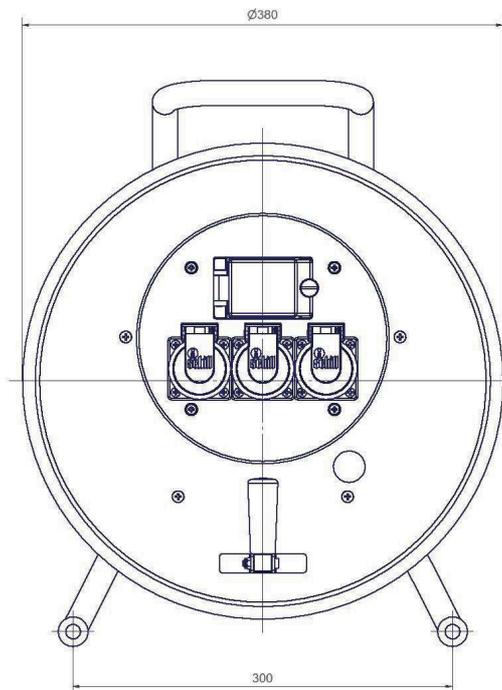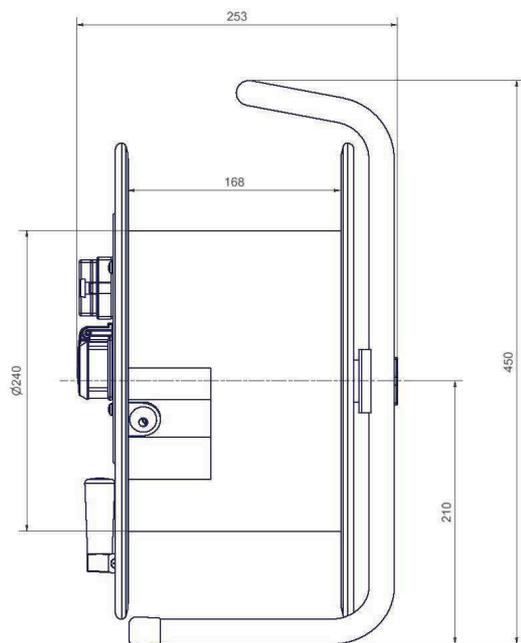


HT 385.2C516MD1

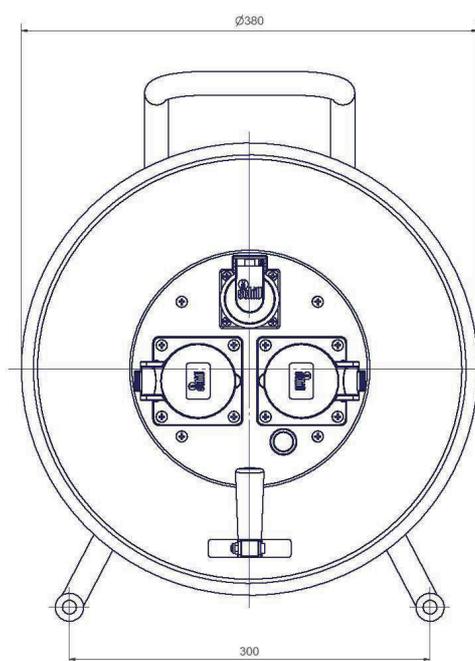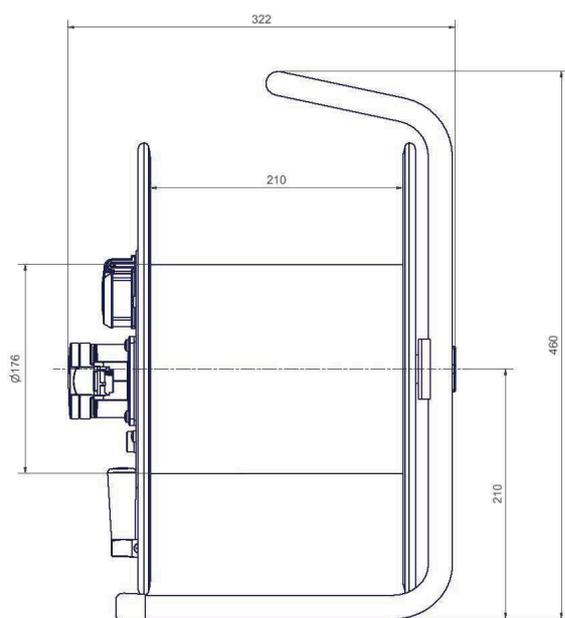


Drum dimensions

HT 385.C516MD3

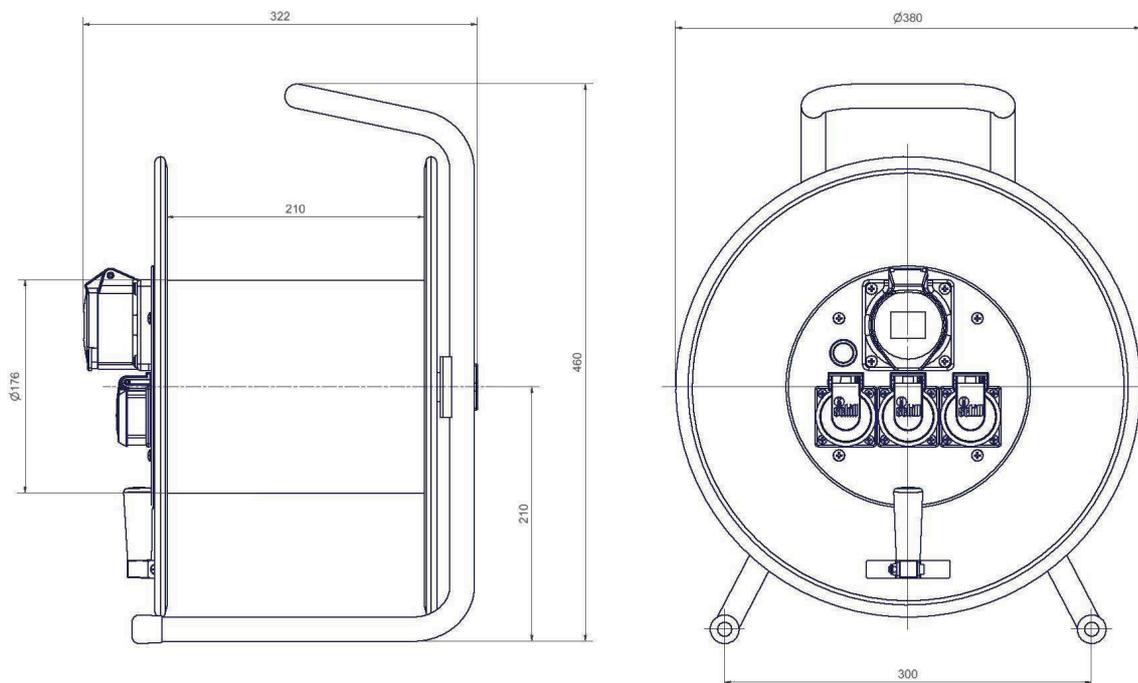


HT 480.MD4

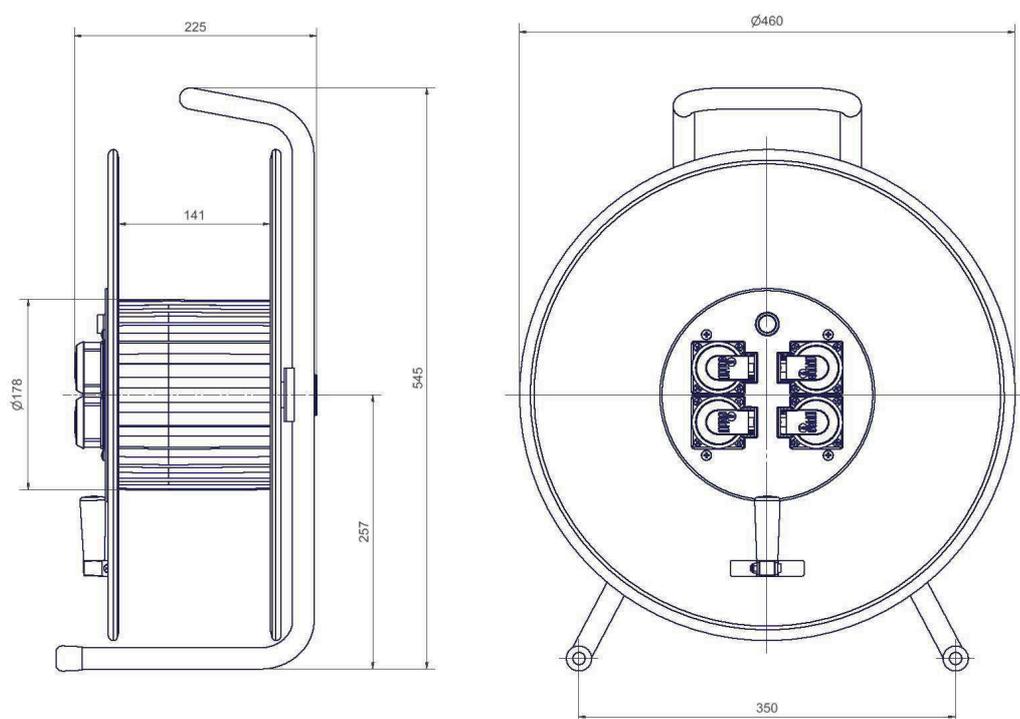


Drum dimensions

HT 480.MD4L

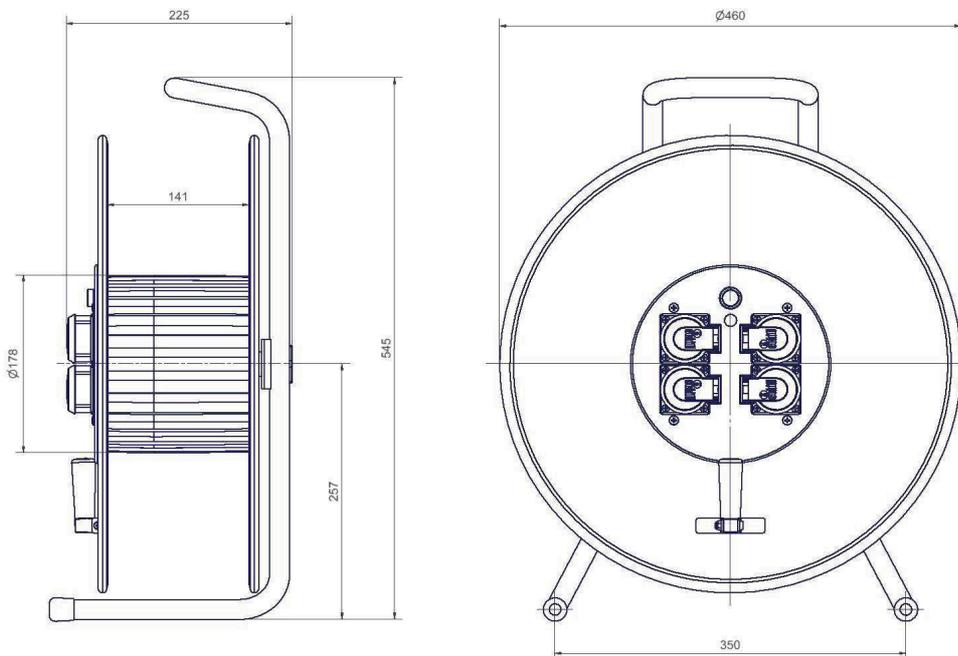


HT 480.MD5

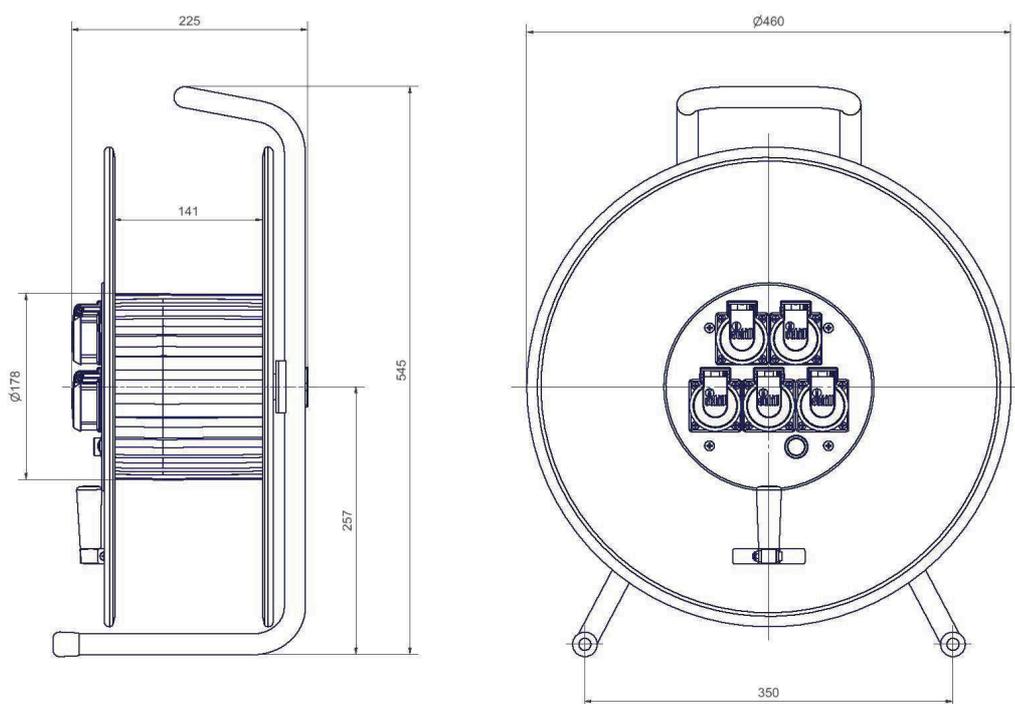


Drum dimensions

HT 480.MD5L

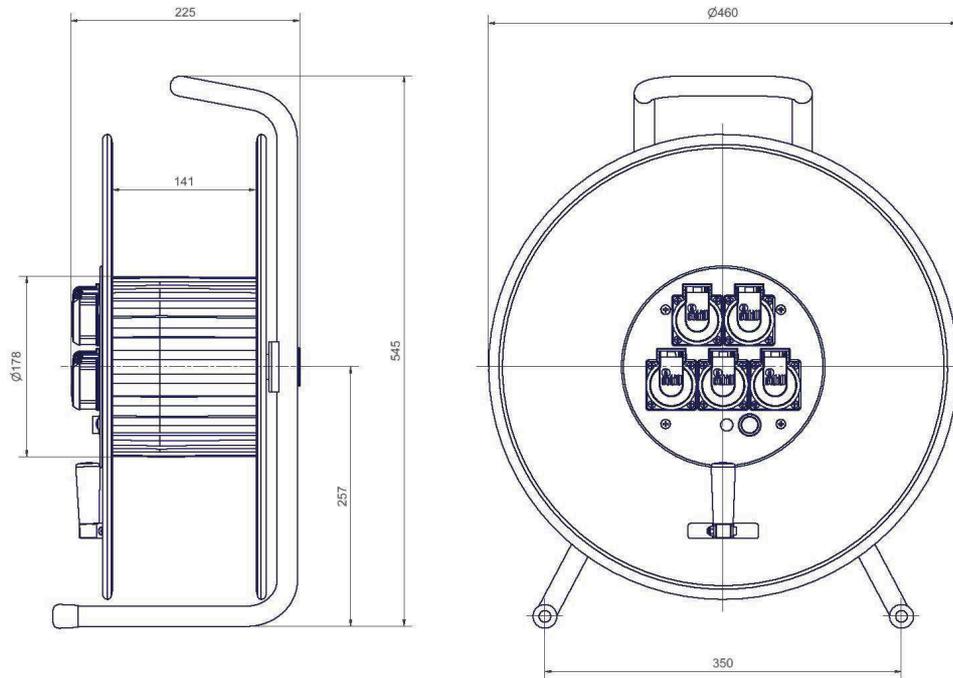


HT 480.2C516

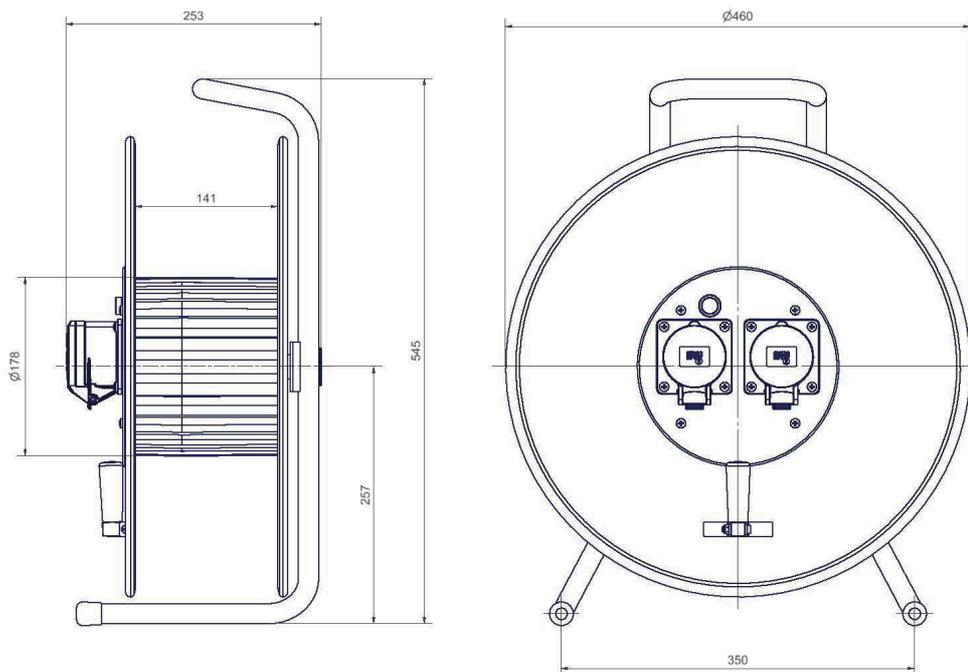


Drum dimensions

HT 480.2C516MD1

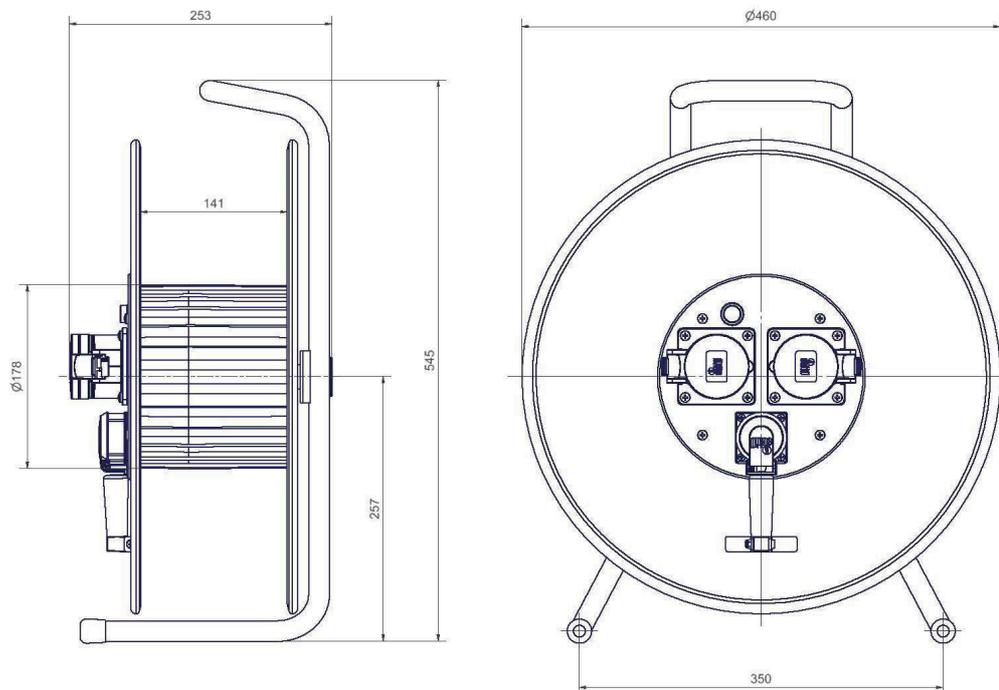


HT 480.C516MD3

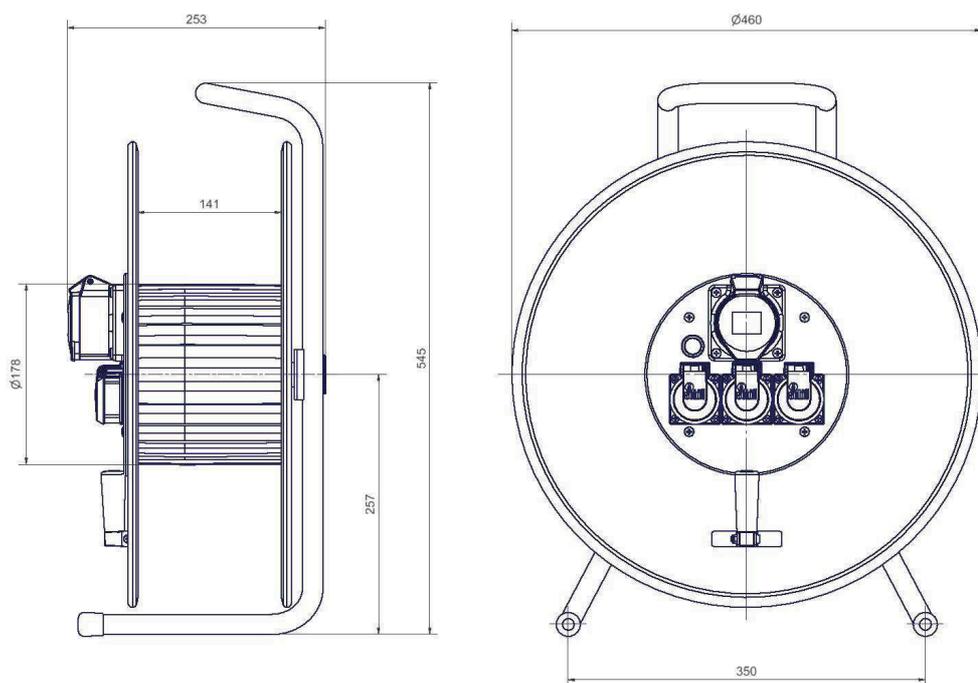


Drum dimensions

HT 481.2C532

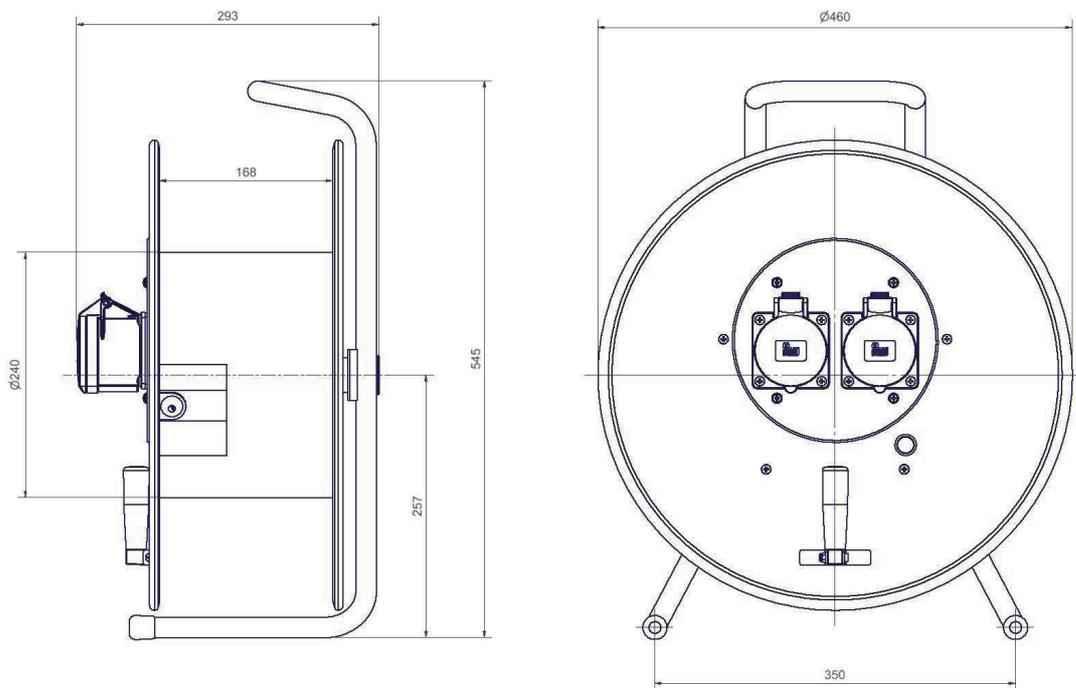


HT 481.2C532MD1

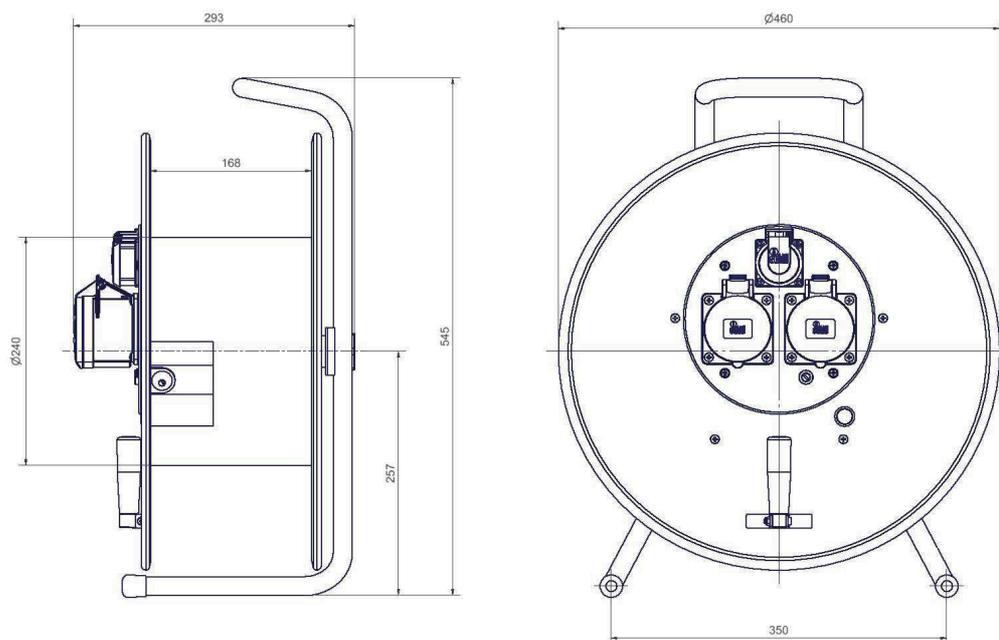


Drum dimensions

HT 481.C532C516MD1

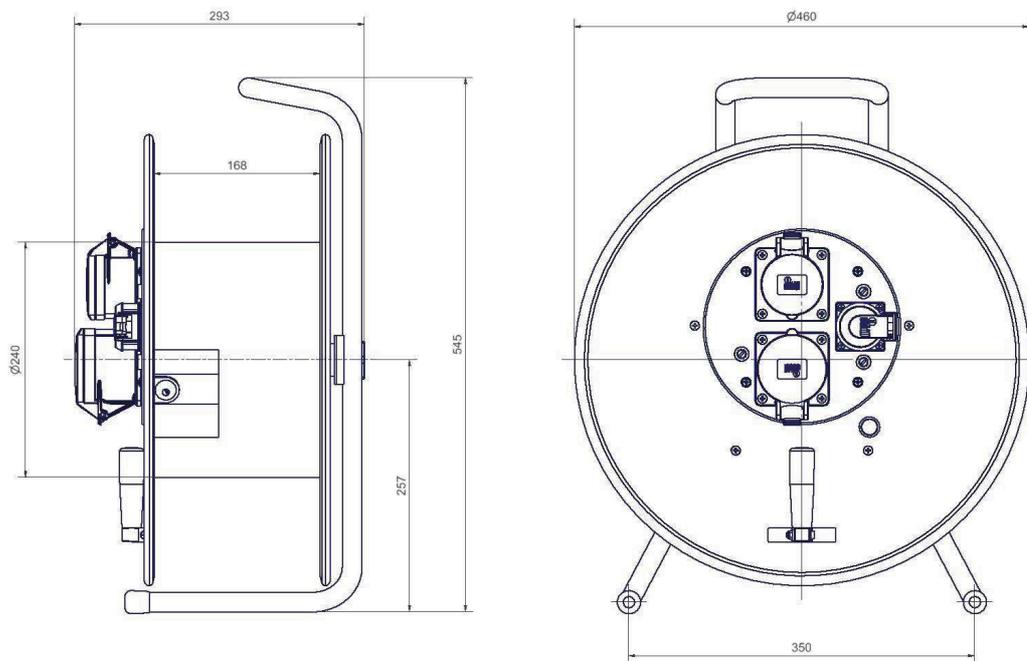


HT 481.C532MD2

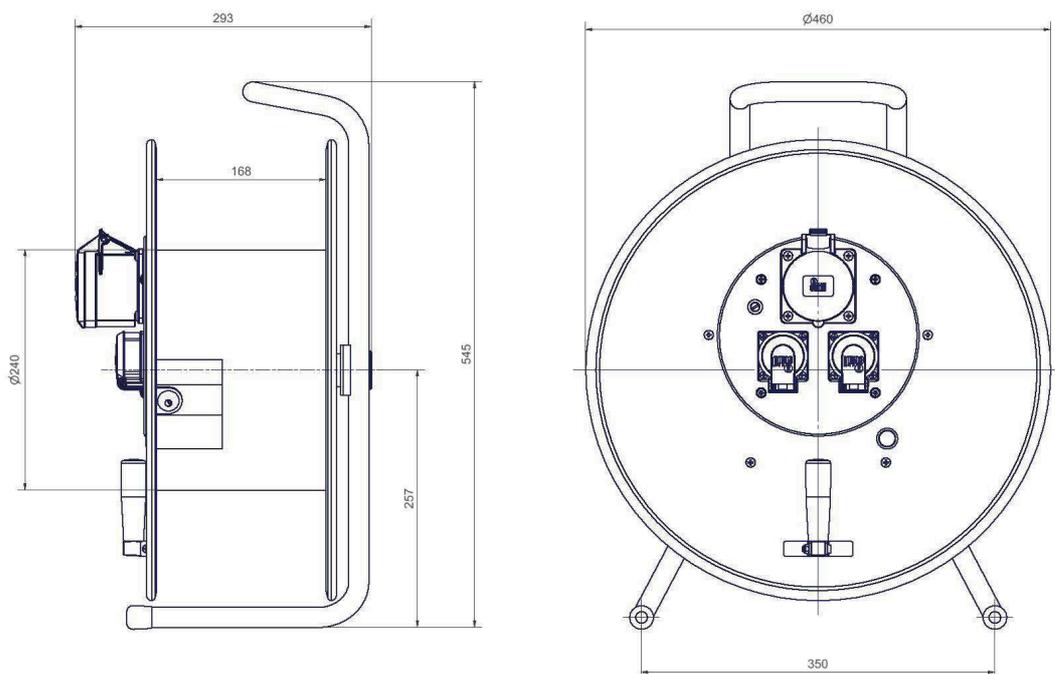


Drum dimensions

HT 482.FI.C516MD3

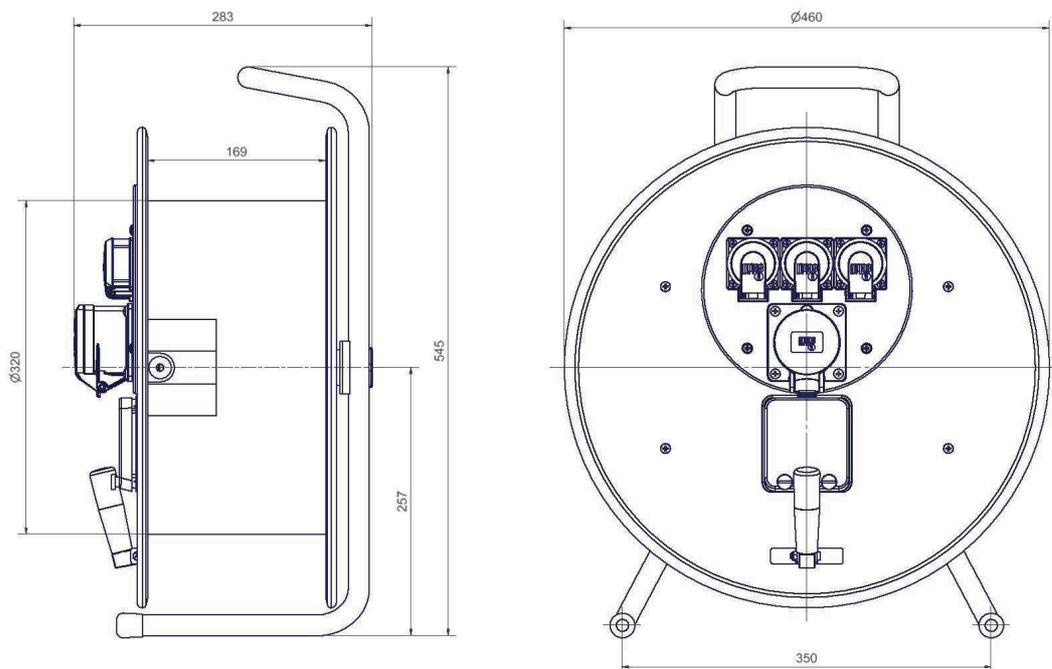


HT 582.C516MD3

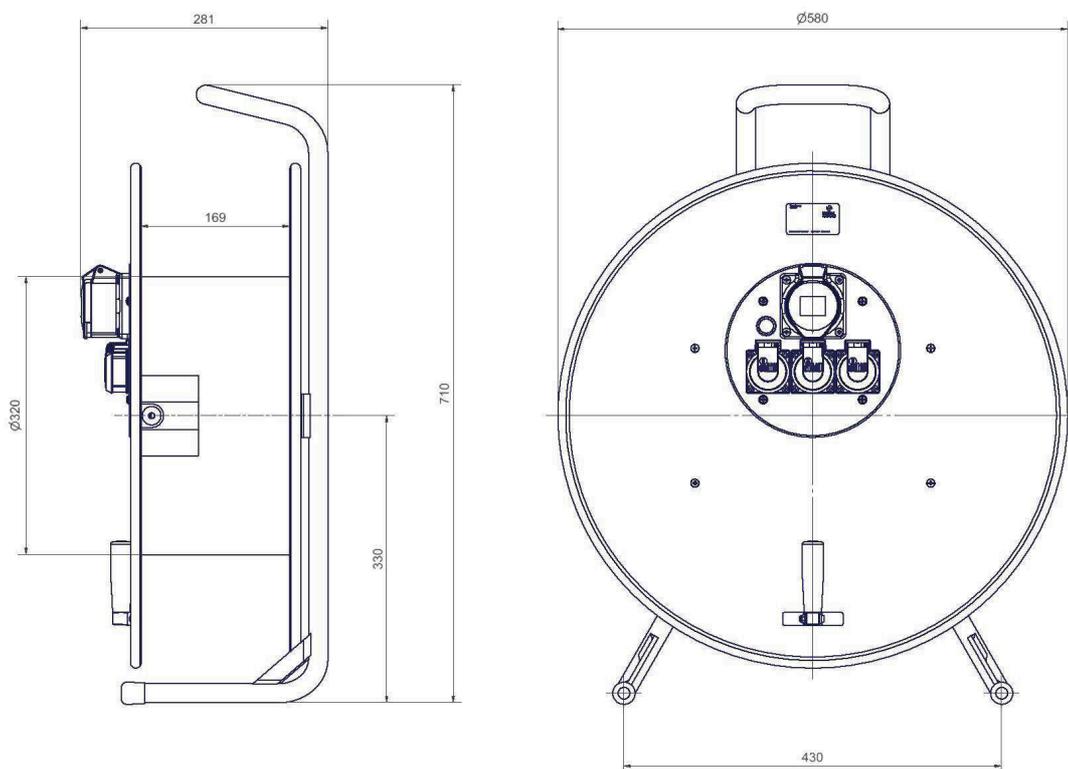


Drum dimensions

HT 582.C532MD2

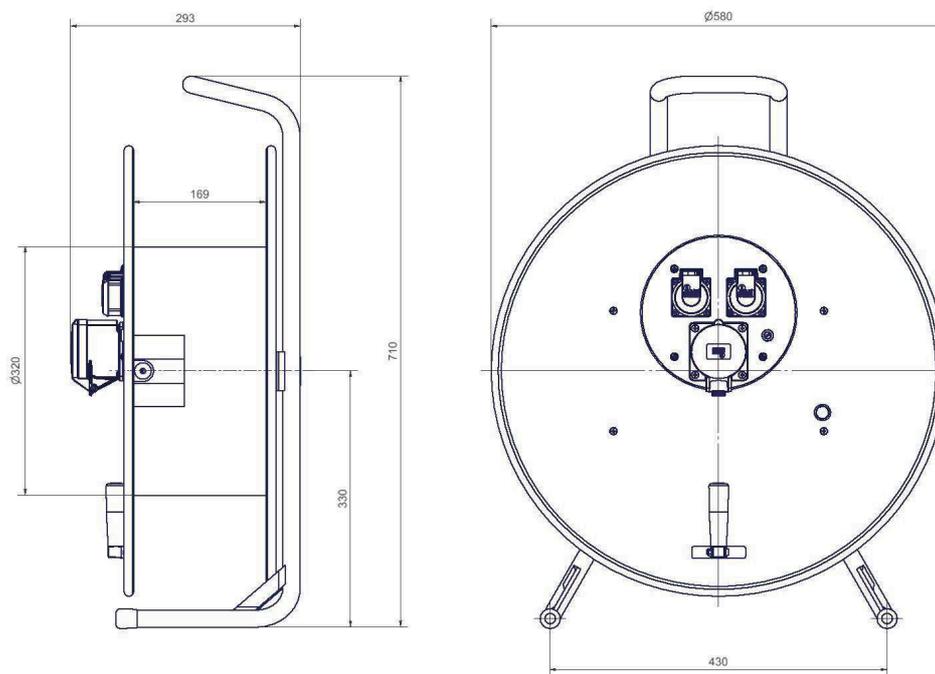


HT 582.MS3+HT 582.MS5

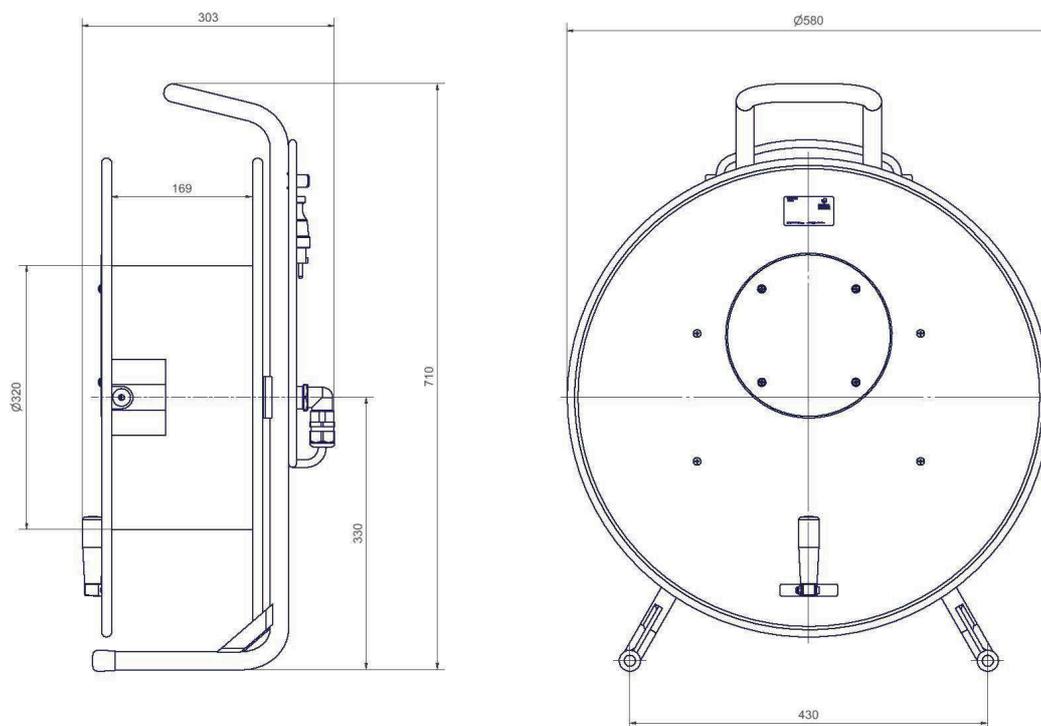


Drum dimensions

IT 220.S4.25KG315

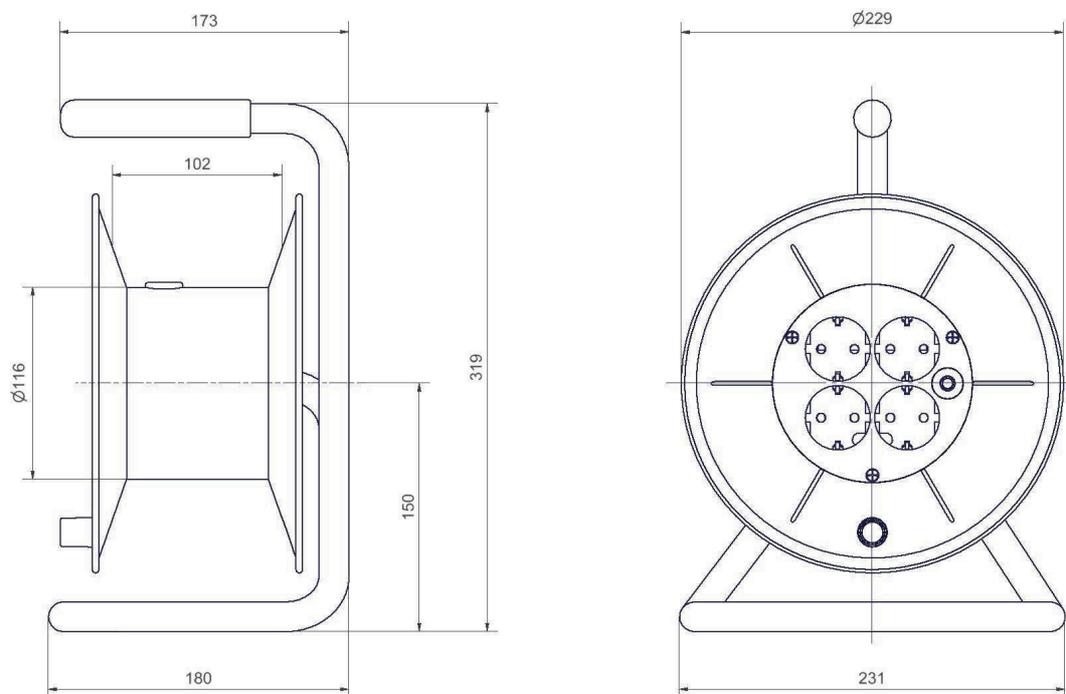


IT 266.MD3

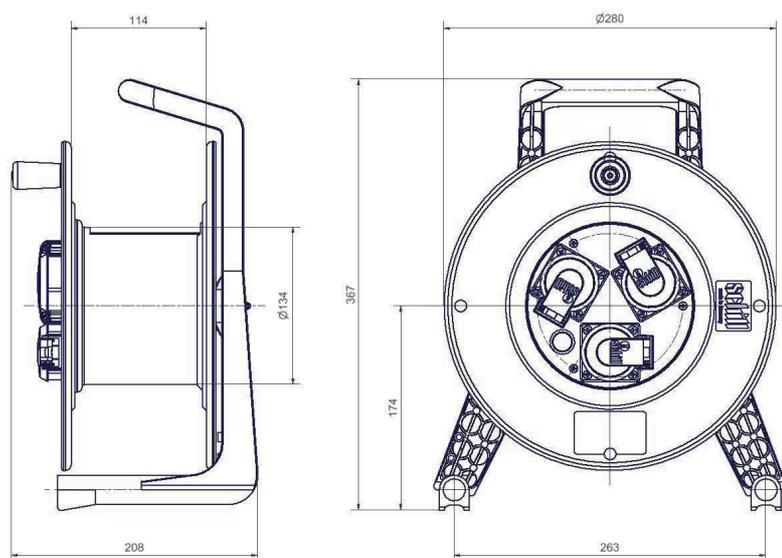


Drum dimensions

IT 266.MD3L


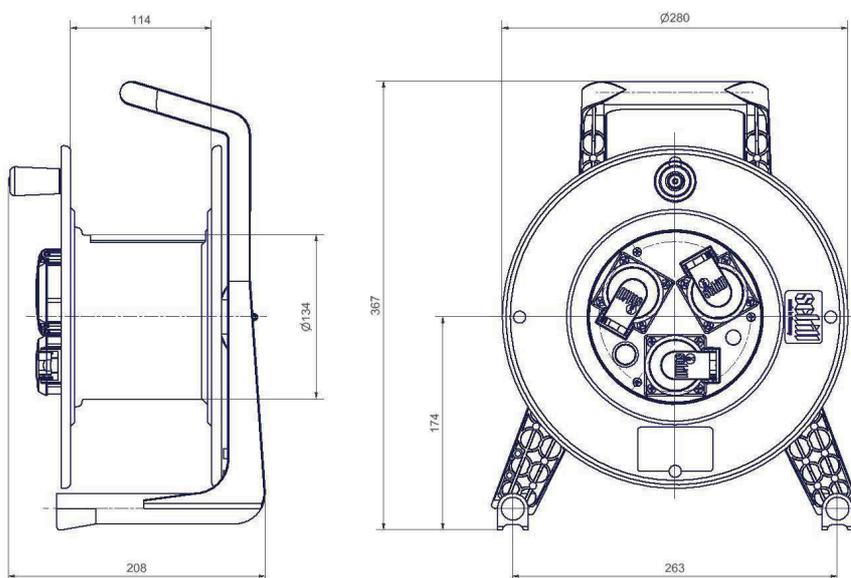


IT 266.MD3B


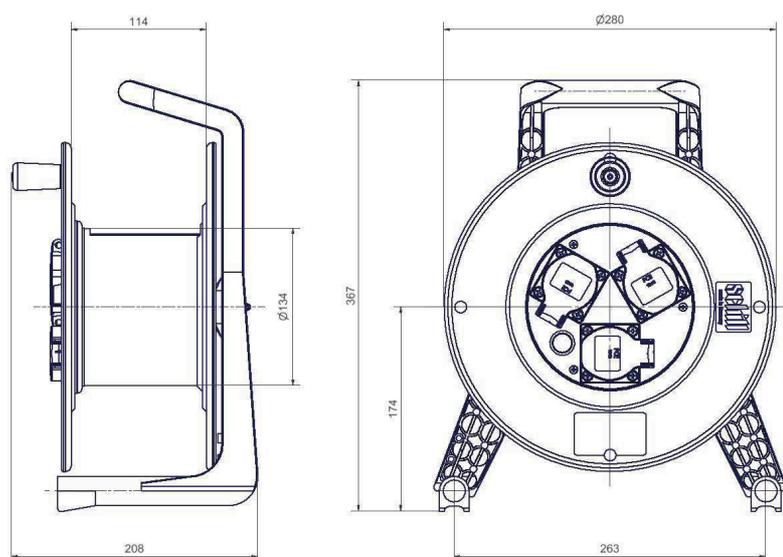


Drum dimensions

IT 280.S4

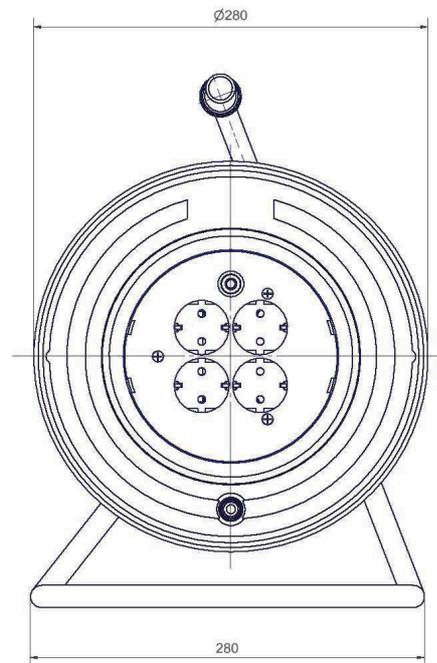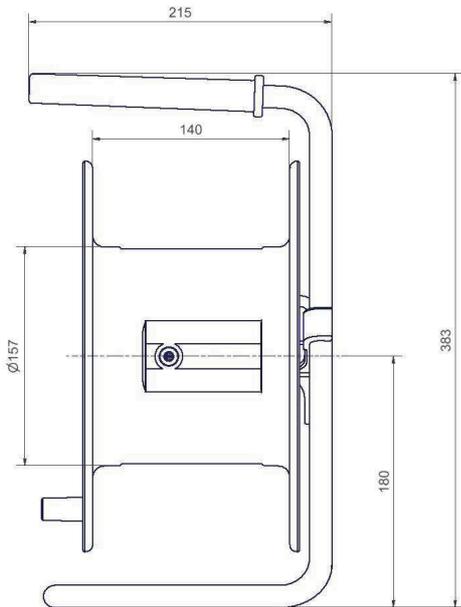


IT 280.TS4

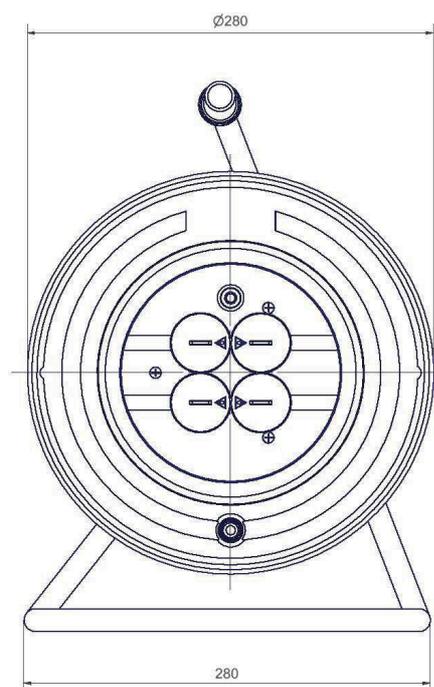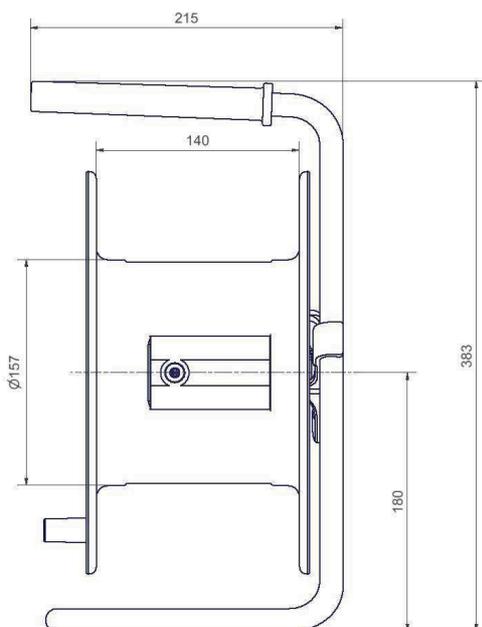


Drum dimensions

IT 300K.MS3+IT 300K.MS5

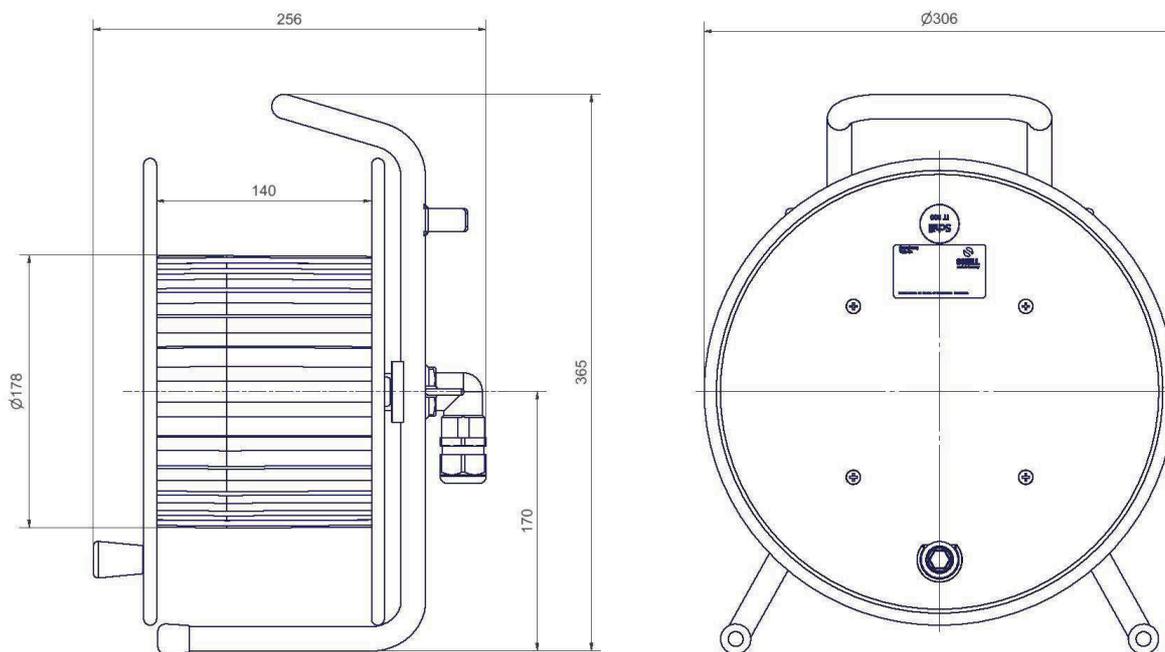


KB 170.S2

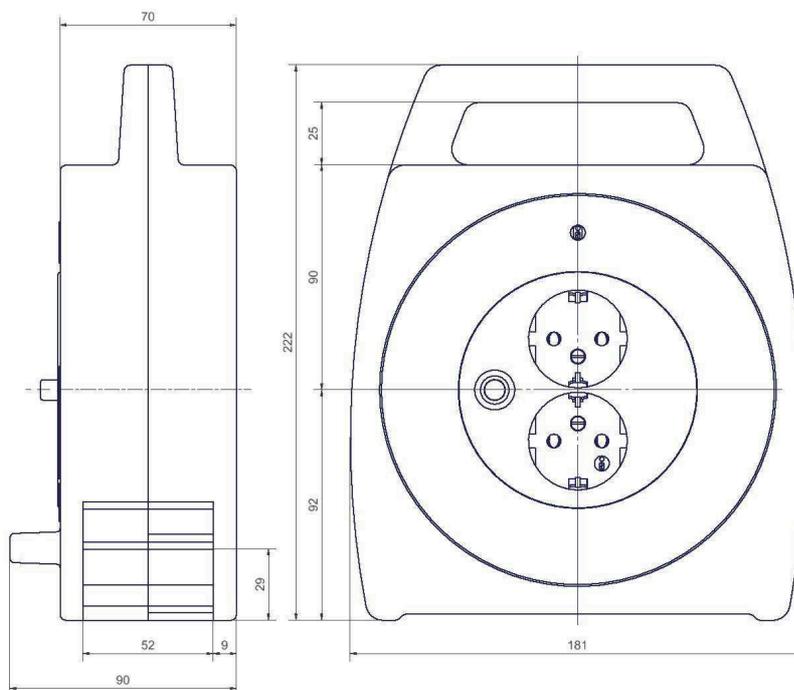


Drum dimensions

KB 220.S2

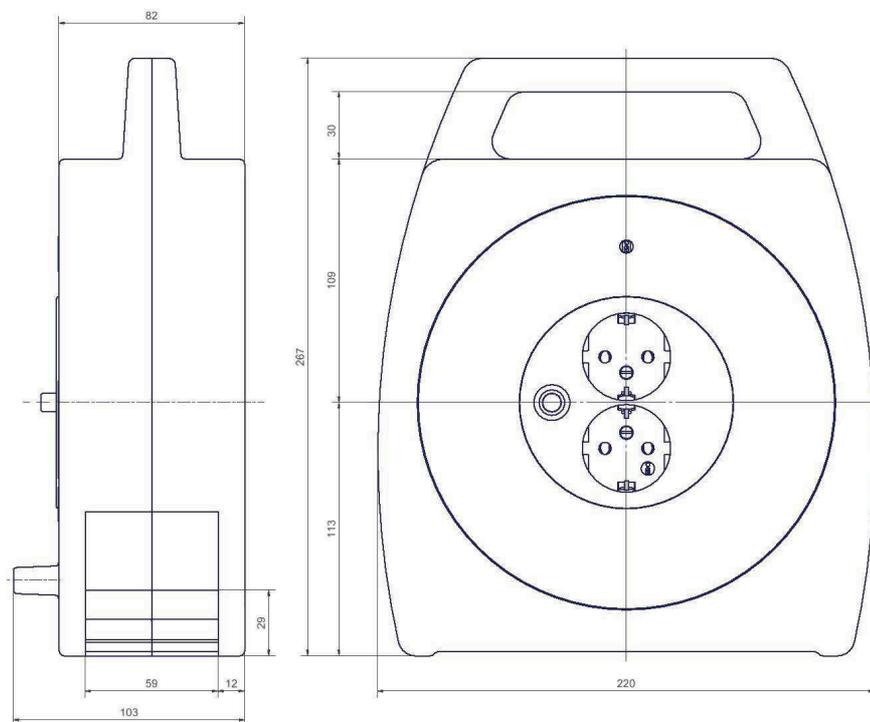


KB 210.S2+KB 0515.S2

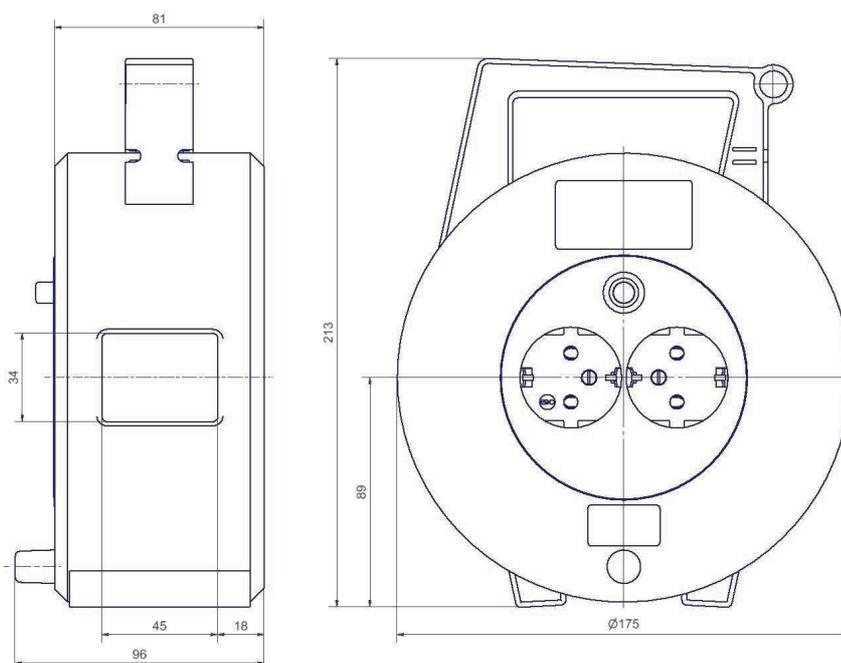


Drum dimensions

KB 225.S2

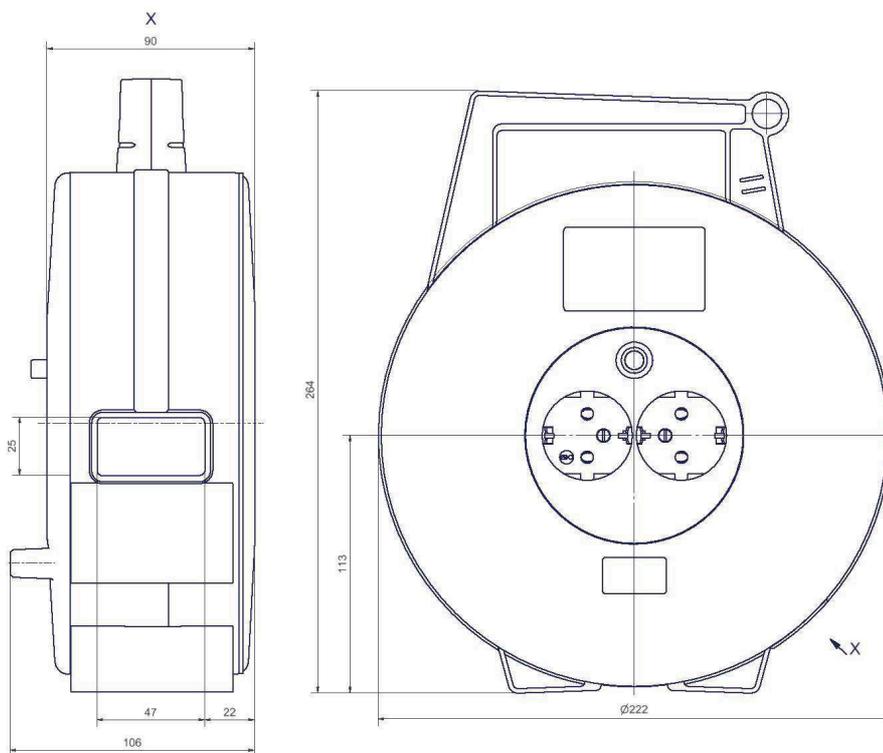


KB 1015.S4

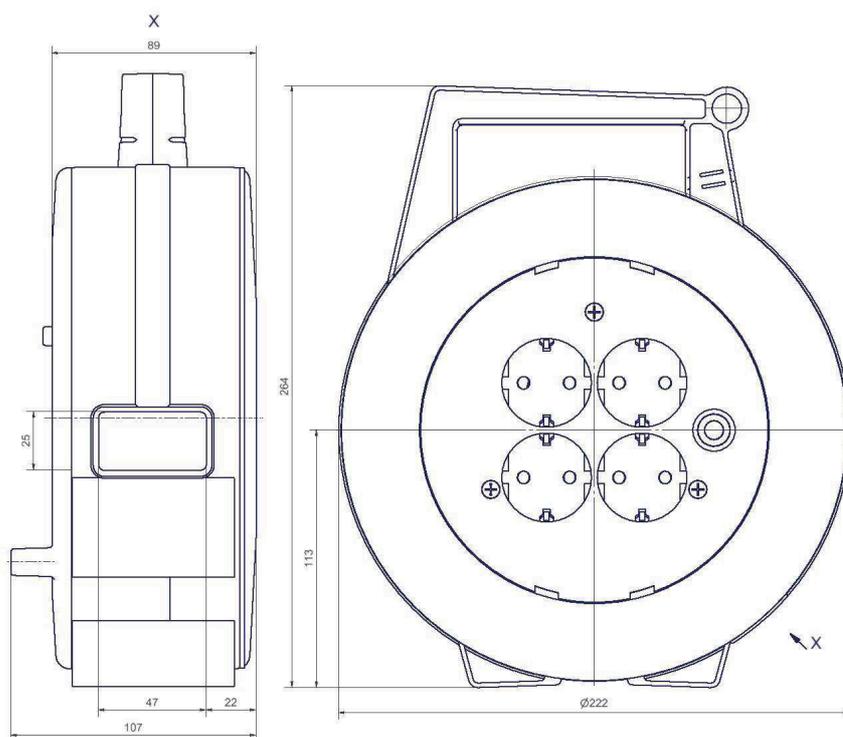


Drum dimensions

SK 4822.MS3.16+SK 4822.MS5.16

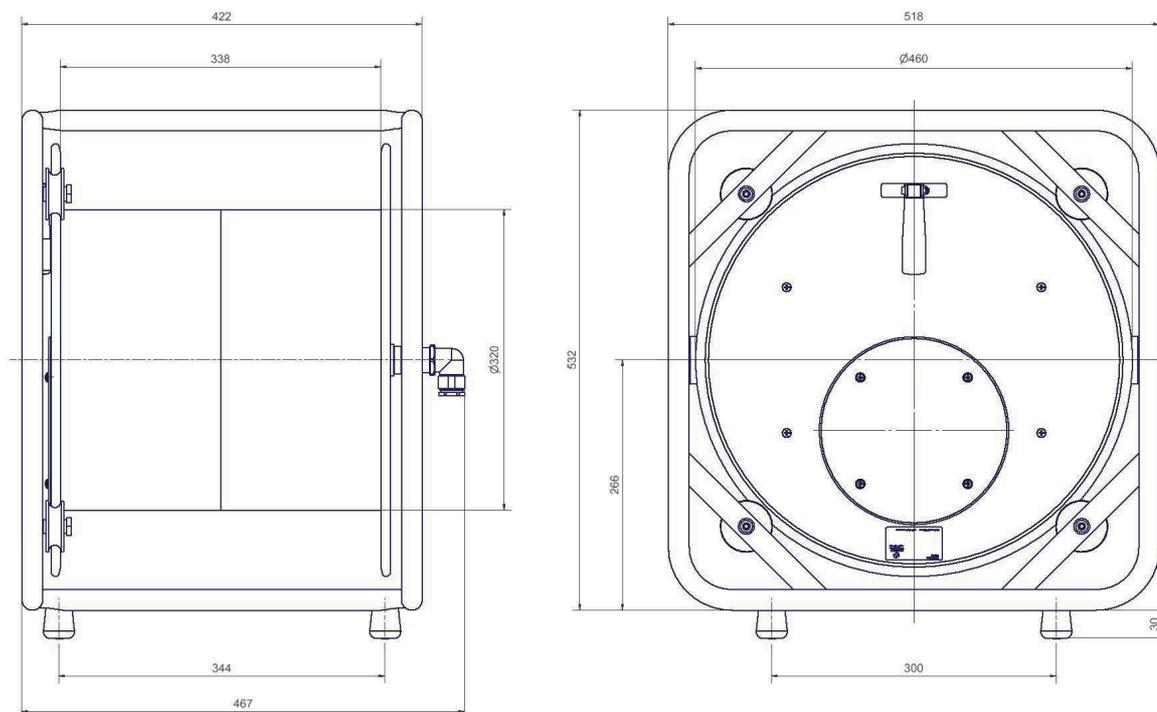


SK 4823.MS3.25+SK 4823.MS5.25/40+SK 4823.MS3.40

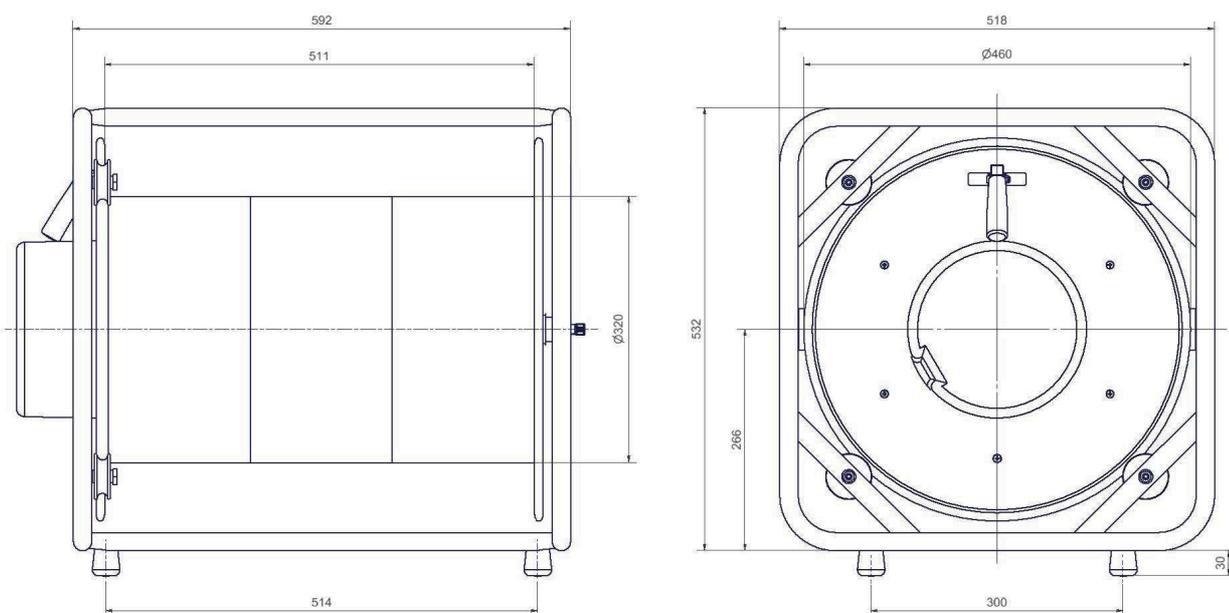


Drum dimensions


SK 4822.MS5.25

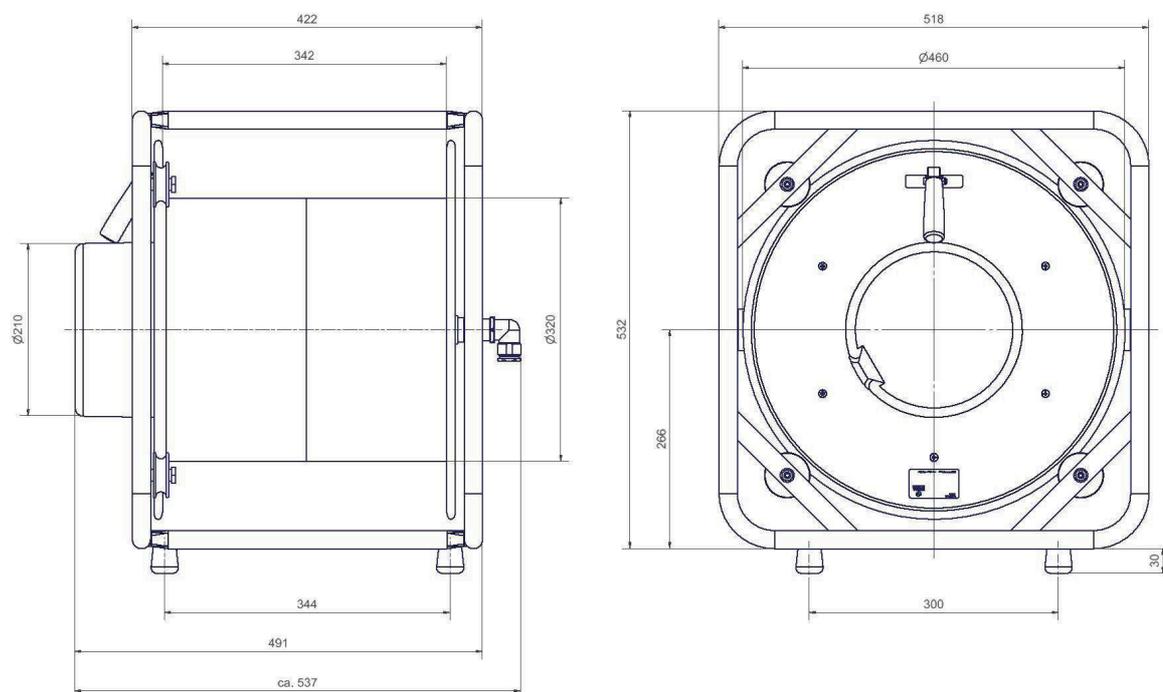


Travelling unit for GT 380

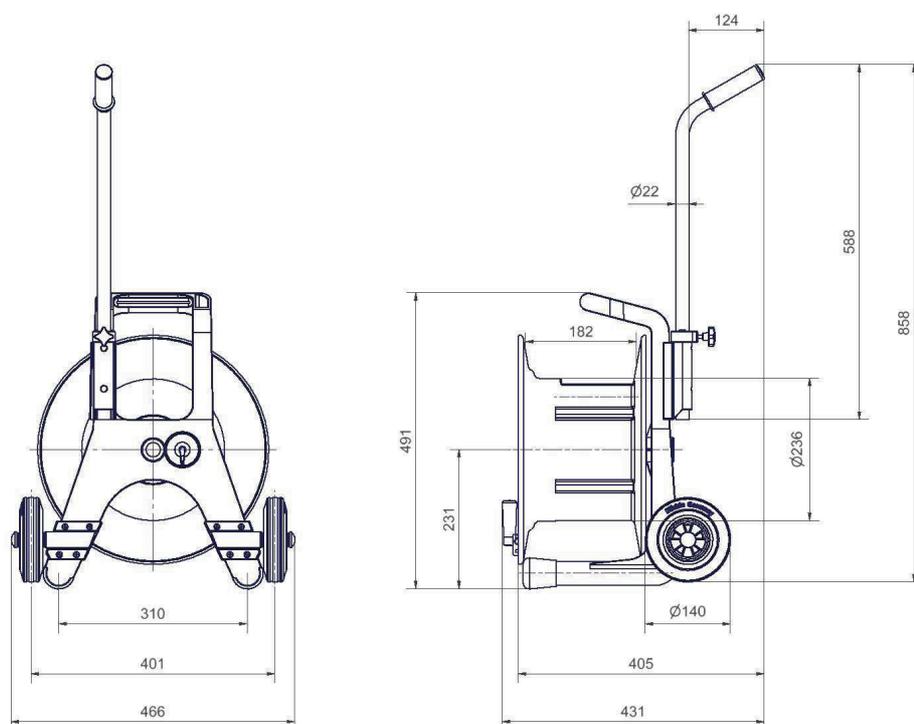

Travelling unit for GT 450

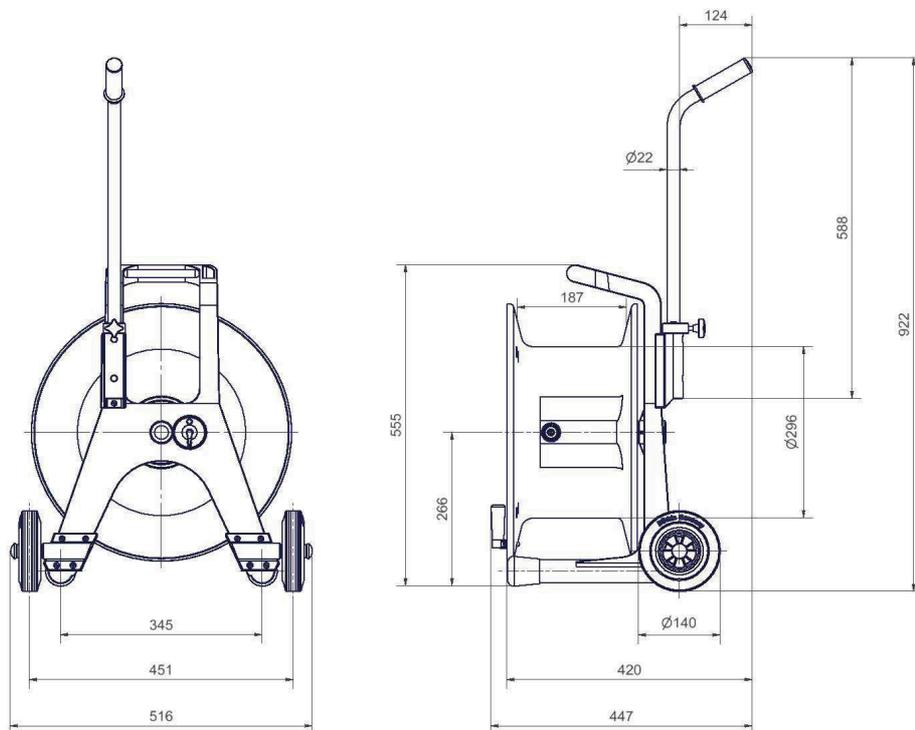


Travelling column unit for HT 380 - HT 582

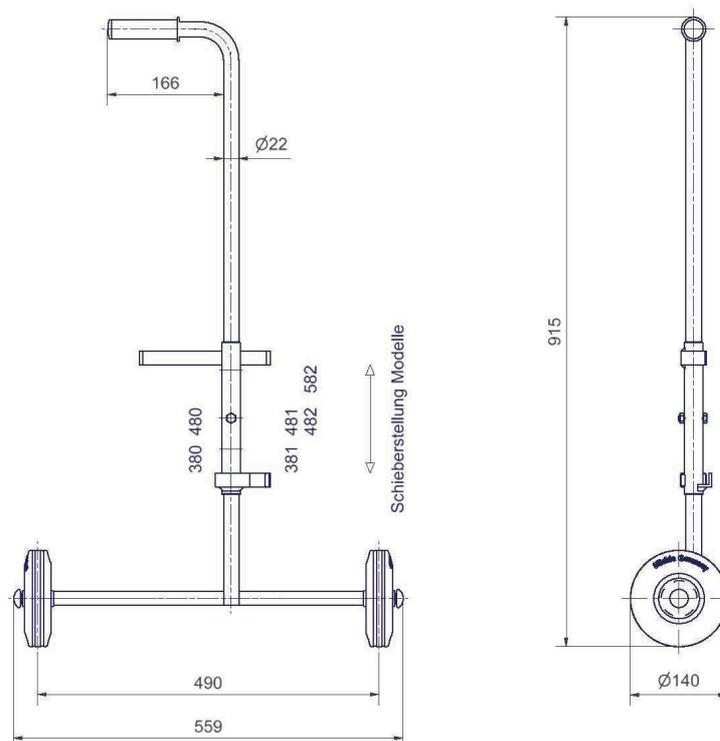


Drum dimensions

TW 4700 + 4730 + 4822.S Transport trolley with brake



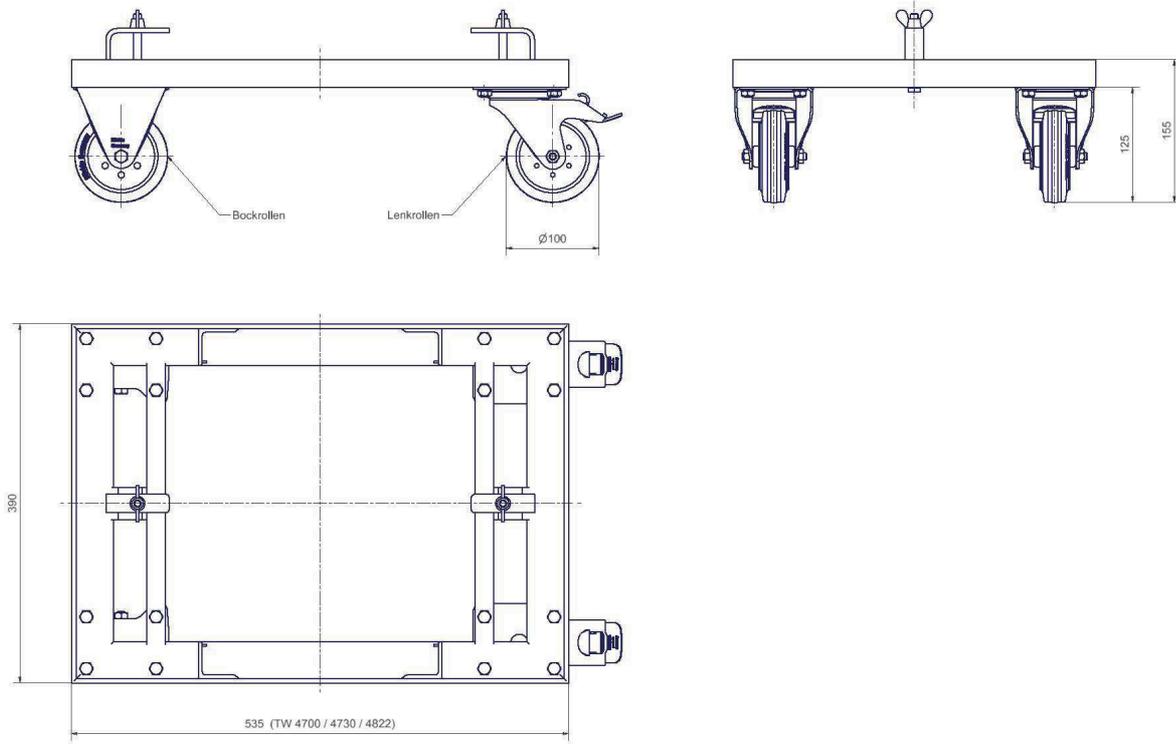


TW 4701 + 4731 + 4823.S Transport trolley with brake

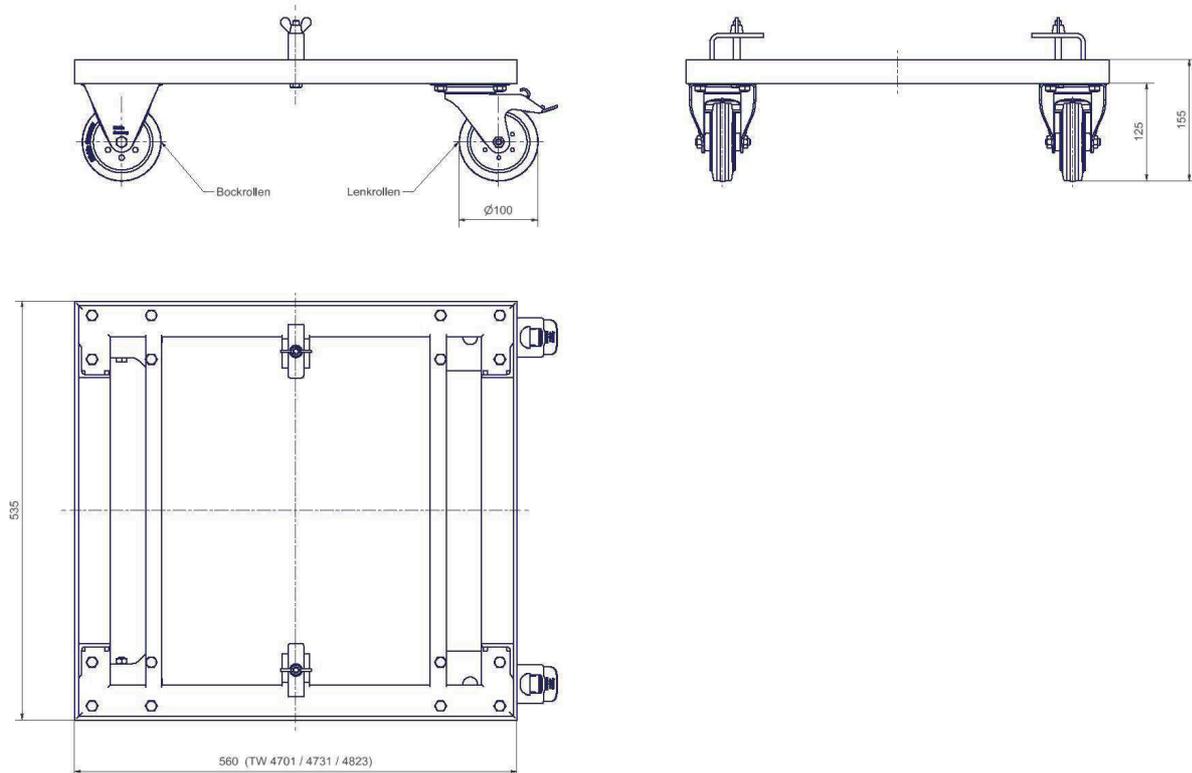

Drum dimensions

TW SK 310 + SK 380 + SK 450

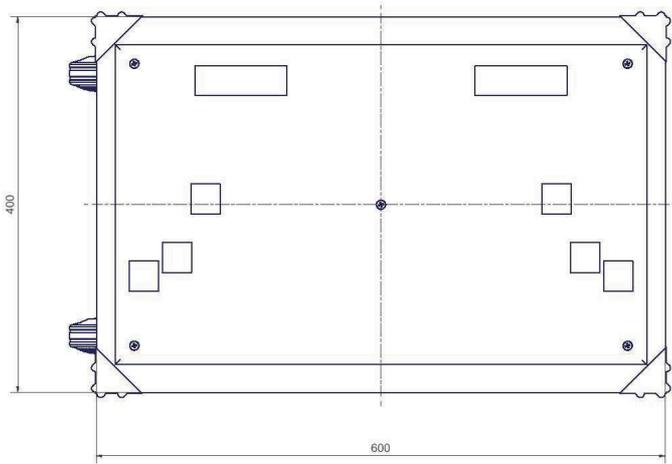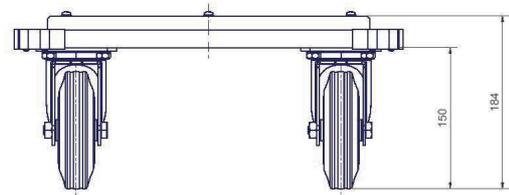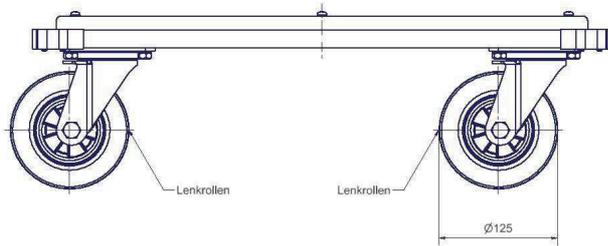

Worldwide

Audio/Video & Broadcast
The Resource Corporation Pty Ltd
Unit 15 / 173 - 181 Rooks Road Vermont
VIC 3133
AUSTRALIA
Phone: +61 (0) 3 9874 5988
E-Mail: sales@trc.com.au
www.trc.com.au

Trade & Industry
De Maegd NV Belgium
Ambachtenlaan 13
3001 Heverlee
BELGIUM
Phone: +32 (0) 16 400302
E-Mail: info@demaegd.be
www.demaegd.be

Trade & Industry
T.C.Hasemer PTY. LTD.
Unit 1, 16 Mavis Street
NSW 2212 Revesby
AUSTRALIA
Phone: +61 (0) 2 9771 9848
E-Mail: sales@hasemer.com.au

Audio/Video & Broadcast
Belram Luxemburg
Chaussee de Wavre, 1600
1160 Brussel
BELGIUM
Phone: +32 (0) 2 6729590
E-Mail: info@belram.com
www.belram.lu

Audio/Video & Broadcast
TONPLAN Goegele & Avedikian OG
Mozartstr. 14
6850 Dornbirn
AUSTRIA
Phone: +43 (0) 5572 200710
E-Mail: info@tonplan.com
www.tonplan.com

Audio/Video & Broadcast
Schill Kanada
4710 St Ambroise, Suite 234
Montreal, QC H4C 2C7
CANADA
Phone: +1 (0) 514-827 2979
E-Mail: info@schillreels.com
www.schillreels.com

Trade & Industry
Ing. E. Csernohorszky GmbH
Wallackgasse 4
1230 Wien
AUSTRIA
Phone: +43 (0) 1 69089-0
E-Mail: cserno@cserno.at
www.cserno.at

Trade & Industry
Hensel (Qingdao) Electrical Installation and Distribution Systems Co.Ltd
NO.8,Xinghai Road Huanhai Development Zone
Chengyang, Qingdao
China - 266108
CHINA
Phone: +86 (0) 532 81108656
E-Mail: info@hensel-electric.cn
www.hensel-electric.cn

Trade & Industry
Spiral Reihls & Co. KG
Erlachgasse 117
1100 Wien
AUSTRIA
Phone: +43 (0) 1 60108-0
E-Mail: zentrale@spiral.at
www.spiral.at

Trade & Industry
Munos spol. s.r.o
Zaspital 408
588 32 Brtnice
CZECH
Phone: +42 (0) 774 320 780
E-Mail: munos@munos.cz
www.munos.cz

Worldwide

Audio/Video & Broadcast
Kinovox Scandinavia
Marielundvej 45B
2730 Herlev
DENMARK
Phone: +45 (0) 70 22 38 11
E-Mail: info@kinovox.dk
www.kinovox.dk

Trade & Industry
Nord Tech Industrisystemer
Lucernemarken 18 A
5260 Odense S
DENMARK
Phone: +45 (0) 65 91 98 02
E-Mail: post@nord-tech.dk
www.nord-tech.dk

Audio/Video & Broadcast
Helipilt Ltd. Estonia
Tänassilma
Vetevana tee 6-3
76406 Harjumaa
ESTONIA
Phone: +372 (0) 56 220 102
E-Mail: helipilt@gmail.com
www.helipilt.ee

Trade & Industry
Oy T. Stenbacka AB
Emalikatu 2 B
04440 Järvenpää
FINLAND
Phone: +358 (0) 207 432 320
E-Mail: info@stenbacka.fi
www.t-stenbacka.fi

Audio/Video & Broadcast
Sommer Cable France
115 Rue de la république
67720 Weyersheim
FRANCE
Phone: +33 (0) 388 51 87 34
E-Mail: france@sommercable.com
www.sommercable.fr

Trade & Industry
Schill UK Ltd
Unit 11 Crystal Business Centre
Sandwich, Kent CT13 9QX
GREAT BRITAIN
Phone: +44 (0) 1304 273298
E-Mail: sales@schilluk.co.uk
www.schilluk.co.uk

Trade & Industry
Hensel Electric India Pvt.Ltd.
35 Kunnam Village
Sunguvarchathram - Walajabad Road
4th km behind Samsung / Flextronics
Sriperumbudur Taluk
Kanchipuram Dist. - 631 604
Tamil Nadu
INDIA
Phone: +91 (0) 44 3727 0202
E-Mail: info@hensel-electric.in
www.hensel.in

Trade & Industry
Reykjafell Ltd.
Skiopholti 35
105 Reykjavik
ISLAND
Phone: +354 (0) 588 6000
E-Mail: reykjafell@reykjafell.is
www.reykjafell.de

Trade & Industry
Hamehaber & Hamekasher (H&H) Ltd.
3 Israel Vishingrad Hamasger
Bat-Yam / 5959410
ISRAEL
Phone: +972 (03) 5516477
E-Mail: hamehaber@netvision.net.il
www.hamehaber.co.il

Audio/Video & Broadcast
Link srl
Via Bruno Pontecorvo 10
00012 Guidonia Montecelio (Rome)
ITALY
Phone: +39 (0) 06 227251
E-Mail: info@linkitaly.com
www.linkitaly.com

Worldwide

Audio/Video & Broadcast
TOMOCA Electronics Co., LTD
Radio-kaikan bild. 10F
1-15-16 Sotokanda Chiyoda-ku
101-0021 Tokyo
JAPAN
Phone: +81 (0) 3-3253-6528
E-Mail: sales@tomoca.co.jp
www.tomoca.co.jp

Audio/Video & Broadcast
TVC
Dvaro str. 140
Siauliai, LT-76199
LITHUANIA
Phone: +370 (0) 41 520 295
E-Mail: tvc@tvc.lt
www.tvc.lt

Trade & Industry
Koopman B.V.
Molenvliet 2
3961 Wijk bij Duurstede
NETHERLANDS
Phone: +31 (0) 343 59 22 22
E-Mail: info@koopman.nu
www.koopman.nu

Audio/Video & Broadcast
Jorgen Holmefjord AS
Jernkroken 9
0976 Oslo
NORWAY
Phone: +47 (0) 22252999
E-Mail: post@holmefjord.no
www.holmefjord.no

Audio/Video & Broadcast
PTH "Neopta electronics" Sp.z.o.o.
ul. Pawla Wlodkowica 14
60-334 Poznan
POLAND
Phone: +48 (0) 61 662 48 51
E-Mail: info@neopta.pl
www.neopta.pl

Audio/Video & Broadcast
Aplauz Sp. z.o.o. Poland
ul. Graniczna 19
05-092 Lomianki-Dabrowa
POLAND
Phone: +48 (0) 22 751 42 39
E-Mail: aplauz@aplauzaudio.pl
www.aplauzaudio.pl

Trade & Industry
Sofema
Rua Dr. Gilberto Monteiro 19
1495-691 Cruz-Quebrada/Dafundo
PORTUGAL
Phone: +351 (0) 213 920 700
E-Mail: sofema@sofema.pt
www.sofema.pt

Audio/Video & Broadcast
First Cable
Sirenevyi Boulevard 3, Bld. 3
105122 Moscow
RUSSIA
Phone: +7 (0) 495 600 6868
E-Mail: info@1-cable.ru
www.1-cable.ru

Audio/Video & Broadcast
LLC "AT Group"
Ilmskaya street, Bld. 5, Case 2, Fl. 4, Premise Z405
127576 Moscow
RUSSIA
Phone: +7 (499) 444-09-05
E-Mail: purchase@at-group.ru
www.at-group.ru

Trade & Industry
SibWest
Ovrjnaja Str. 4-1
630049 Novosibirsk
RUSSIA
Phone: +7 (0) 383 21 95 200
E-Mail: nsk@sibwest.com
www.sibwest.com

Audio/Video & Broadcast
Masstron Co., Ltd
5th Lok Yang Road 14
629763 Singapore
SINGAPORE
Phone: +65 (0) 6763 0309
E-Mail: sales@masstron.com
www.masstron.com

Worldwide

Audio/Video & Broadcast
Hannyang Broadcomms
305 Ho,A-dong, Hangang Xi Tower, 401
Yangcheon-gu
Seoul
SOUTH KOREA
Phone: +82 (0) 2 2602 1581/1585
E-Mail: sales@hannyang.com
www.hannyang.com

Audio/Video & Broadcast
Percon S.L.
Diputació 203
08011 Barcelona
SPAIN
Phone: +34 (0) 93 451 78 30
E-Mail: central@percon.es
www.percon.es

Trade & Industry
Coma S.A. Spain
Narcis Monturiol, no. 35
Poligon Industrial SudOest
08028 Sant Just Desvern (Barcelona)
SPAIN
Phone: +34 (0) 93 490 31 51
E-Mail: coma@eecom.com
www.eecom.com

Audio/Video & Broadcast
Cabletronic Sweden
Västberga Alle 32
12630 Hägersten
SWEDEN
Phone: +46 (0) 8 447 43 50
E-Mail: epost@cabletronic.se
www.cabletronic.se

Trade & Industry
Demelectric AG Schweiz
Steinhaldenstrasse 26
8954 Geroldswil
SWISS
Phone: +41 (0) 43 455 44 00
E-Mail: info@demelectric.ch
www.demelectric.ch

Audio/Video & Broadcast
Masstron (Thailand) Co., Ltd
1213/334 Soi Ladprao 94 (Panjamitr),
Ladprao Road, Kwang Plabpla, Khet Wang
Thonglang,
Bangkok, 10310
THAILAND
Phone: +66 (0) 2319-9375-6
E-Mail: sales@masstron.com
www.masstron.com

Audio/Video & Broadcast
Engineer-Service Ltd Ukraine
15 Vavylovykh str.
Kiev, 04060
UKRAINE
Phone: +38 (0) 44 593 18 20
E-Mail: info@iservice.kiev.ua
www.serv.com.ua

Audio/Video & Broadcast
CableTech
Warehouse No. 7 – Plot No. 598-1212
UNITED ARAB EMIRATES
Phone: +971 (0) 4 8852895
E-Mail: info@cabletechmea.com
www.cabletechmea.com

Trade & Industry
Hensel Electric U.A.E.
PO Box 514456
Sharjah Airport International Free Zone (SAIF Zone)
Block Q4-Street - Q4-57
Sharjah
UNITED ARAB EMIRATES
Phone: +971 (0) 6 5747547
E-Mail: info@hensel-electric.ae
www.hensel-electric.ae

Audio/Video & Broadcast
Schill USA
7044 Winding Trail
Brighton, MI 48116
USA
Phone: +1 (0) 517 404 3746
E-Mail: info@schillreels.com
www.schillreels.com

Follow us on

@schillkabeltrommeln



schilltrommeln



Schill Kabeltrommeln



schill_gmbh



@schill_gmbh





SCHILL

connecting professionals

sales@schill.de | www.schill.de