



von Profis - für Profis
connecting professionals



Catalog Industry
2019 / 1

Follow us on




@schillkabeltrommeln



schilltrommeln



Schill Kabeltrommeln



schill_gmbh



@schill_gmbh

The right cable drum for professionals.

Any work involving cables, lines or hoses requires cable drums. Whether it is at home, in trade, in industry, at TV or radio stations or at events, Schill offers impressive, high-performance products for every application.

Schill GmbH & Co. KG is based in Baden-Württemberg and has been producing cable drums and reels in the family tradition since 1948. The forward-looking medium-sized enterprise produces both individual solutions and standard systems: stable plastic cable boxes for domestic use, robust cable drums made from special rubber or sheet steel for construction as well as motorised built-in cable drums for outside broadcast vans; Schill's product range meets every need – right up to pivoting spring-loaded or hose reels.

Schill provides innovative systems for customers and partners from the fields of audio/video, broadcast, trade and industry. Improvement, development and regular inspections of the cable drums and reels keep quality at a consistently high level while always ensuring compliance with current international standards such as DIN EN ISO 9001:2015.

Furthermore, many Schill cable drums meet the requirements of the German Social Accident Insurance DGUV; DGUV Info 203-006 (BGI 608) and DGUV Info 203-005 (BGI 600 Category K2).

The headquarters and administration of Schill GmbH & Co. KG are situated in Fellbach near Stuttgart. Since 1968, the production facilities have been in Laichingen on the Swabian Jura. Today, the company is run by the third generation of Schill's – Ingo and Gerrit – and has a total of 60 employees who boast many years of experience and expertise.

Over the years, Schill has become established as a major name on the international global market.



Administration


Schill GmbH & Co. KG
Bruckstraße 44
D-70734 Fellbach, Germany
Phone: +49 (0)711 578807-0
Fax: +49 (0)711 578807-44



Production

Schill GmbH & Co. KG
Hirschstraße 81
D-89150 Laichingen, Germany
Phone: +49 (0)7333 9648-0
Fax: +49 (0)7333 9648-44

The company with tradition

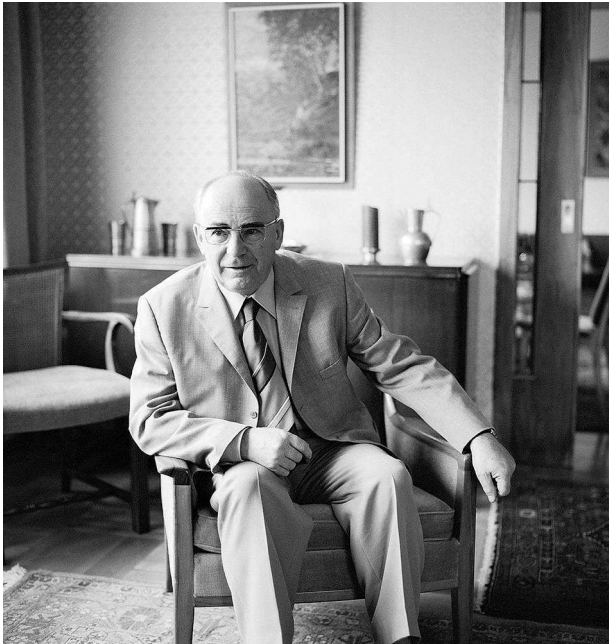

The company founder: Otto Schill

As a company with a strong tradition which has been characterised by quality and solid craftsmanship for over half a century, Schill produces innovative products with meticulous care and state-of-the-art production technology. For over 60 years, the company's mission has been to provide the best for its customers, every time. Innovations in applicability and technology set new standards again and again and ensure that the products are constantly being redeveloped and improved. In this way, a revolutionary idea from company founder Otto Schill, combined with vision, love and passion, paved the way for a truly indispensable product.

1940


By manufacturing accessories for broadcasting such as special cable drums, director's stands and microphone tripods, the engineer Otto Schill writes the first chapter of this traditional company's impressive success story.



Mikrofon- und Beleuchtungsständer ausziehbar auf 5/10 m

1950

The company expands and grows continuously thanks to extremely innovative inventions such as the portable cable drum made from sheet steel.

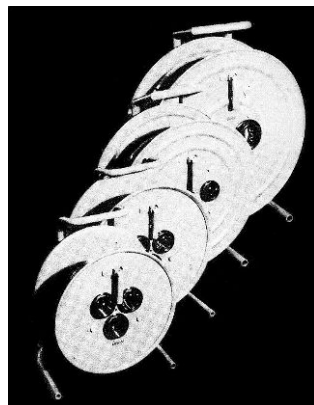

1960

A cable box with ten metres of cable and two sockets facilitates the increasing use of electrical devices in the home. In 1967, the company presents the first spring-loaded drum.



1970

Otto Schill invents the first fully insulated plastic cable drum. The new light box joins the cable box range. Schill trained the first tool maker at their site Laichingen in the year 1970.



The company with tradition



Third generation

Ingo and Gerrit Schill have been the company's managing directors for over 16 years. Today, the company has 60 employees and has long been established as a major name on the international global market.



The managing directors (from left): Gerrit and Ingo Schill

1980

The company launches the largest plastic cable drum produced to date on the market. Thanks to its large core diameter, it can be fitted with all kinds of socket combinations, residual current devices and automatic fuses.




1990

Following the death of senior partner Otto Schill, his son continues his life's work by taking on the management of the family company. Immo Schill decides to introduce a quality management system.




2000

Immo Schill's sons Ingo and Gerrit join Schill GmbH & Co. KG as further managing directors and are soon made partners. The company's client base expands continuously in the fields of broadcasting, TV and video and overseas exports increase. At the end of 2010, Immo Schill retires from the company management. In 2008 Schill becomes a training company for commercial professions at their office in Fellbach.

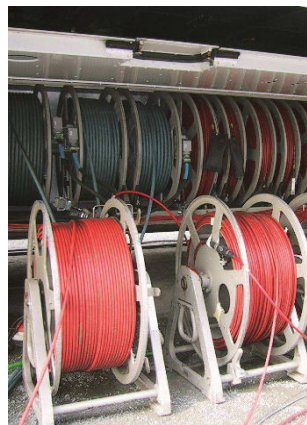

2010

At the end of 2010, Immo Schill retires from the company management. In 2017 Schill launches the first completely waterproof cable reel GT 310.WS3-IP67. One year later, various FT reels with LAN cable are introduced.

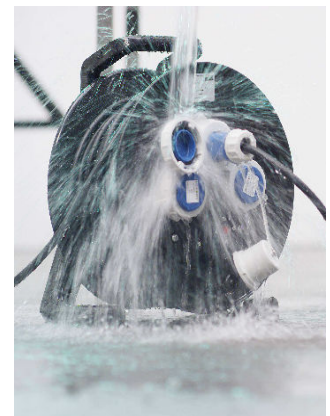

Structure of the article description:

Example: Trade

GT 310.MD4L.40PU315



1 2 3 4 5 6 7 8

1 Drum type

Special rubber cable drum

2 Approx. drum diameter in mm

310

3 Socket description

4 machine sockets 2-pole+E, 16A, 230V

4 Other description

Signal lamp

5 Cable length in m

40

6 Cable type

H07BQ-F

7 Number of cores

3-core

8 Cable cross section in mm

1,5

Example: Industry

FT 260.0308.S316



1 2 3 4 5

1 Drum type

Cable reel with spring balancer

2 Approx. housing diameter in mm

260

3 Numbers of slip ring poles

3-pole slip ring

4 Cable length in m

8

5 Plug connection

3-pole 16A plug connection

Example: Audio / Video

GT 310.S0



1 2 3

1 Drum type

Special rubber cable drum

2 Approx. drum diameter in mm

310

3 Fitting

Without sockets / with blank cover for self-tooling

Example: Broadcast

PL 450.250.300



1 2 3 4

1 Drum type

Camera cable drum

2 Approx. disc diameter in mm

450

3 Approx. drum diameter in mm

250

4 Core width in mm

300

Description

Cable descriptions

KK	H05VV-F / Plastic cable / suitable for indoor use
KG	H05RR-F / Rubber cable / suitable for indoor use
KS	H07RN-F / Heavy rubber hose line / suitable for outdoor use
PU	H07BQ-F / PUR-Line H07BQ-F (standard cable colour yellow, orange possible; cable printing possible / suitable for outdoor use)

Drum type

ALD	Cable winch drum made of polycarbonate	Practical Line
ALM	Motorized cable drum made of polycarbonate	Practical Line
BA	Spring balancer for weight compensation	Dispensor Line
EFT	Installation cable reel with spring balancer made of plastic	Flex Line
EST	Installation hose reel with spring balancer made of plastic	Air Flex Line
FT	Cable reel with spring balancer made of plastic or sheet steel	Flex Line
FTE	Cable/Spring balancer reel for grounding purposes made of plastic	Flex Line
GT	Special rubber cable drum	Professional Line
HT	Sheet steel cable drum	Classic Line
IT	Plastic cable drum	Base Line
IPL	Motorized drum system made of polycarbonate	Individual Line
KB	Cable box made of plastic	Home Line
MPL	Motorized drum system made of polycarbonate	Camera Line
PL	Camera cable drum made of polycarbonate or aluminium	Camera Line
PLG	Cable winch drum made of polycarbonate	Camera Line
SK	Stage cable drum made of sheet steel	Stage Line
SL	Stage cable drum made of polycarbonate	Stage Line
ST	Hose reel with spring balancer made of plastic or sheet steel	Air Flex Line
VL	Extension cable	Extension Line

Socket description

B	Belgian / French Version
BS	Sockets British Standard
C316	CEE 3x16A / 2-pole+E, 16A, 230V
C516	CEE 5x16A / 4-pole+E, 16A, 400V
C532	CEE 5x32A / 4-pole+E, 32A, 400V
CW	CEE-sockets pressurised water resistant
MD	Machine socket with hinged cover / 2-pole+E, 16A, 230V
MD4L	Machine socket with hinged cover and signal lamp (L) / 2-pole+E, 16A, 230V
MD4K	Machine socket with child-proof lock (K) / 2-pole+E, 16A, 230V
S	Open earthed socket / 2-pole+E, 16A, 230V / indoor use only
TS	Open earthed socket with drip water cover / 2-pole+E, 16A, 230V
WS	Socket pressurised water resistant / 2-pole+E, 16A, 230V
Z-plug connection	Cable reels plug connections

Description unloaded drums

Open	Without sockets / without KOMB-cover
S0	Without sockets / with blind cover for self-tooling / partly with closed front panel
RM	Without sockets / with auxiliary spool
MFK	Without sockets / with latching door
RMFK	Without sockets / with latching door and auxiliary spool
MS	Without sockets / with slip ring

Other description

AD KOMB	Socket insert without sockets
FI	With residual current device
FST	Travelling column unit
KOMB	Combination cover with sockets
LED	With integrated LED
PRCD-S	With personal protection when drawing current from on-site sockets
Travel Unit	Transport travel unit
TW	Transport trolley for SK's

Long-time spare parts service

You need a spare part? At Schill you can obtain almost all components of the products as spare parts. The sales team is looking forward to your inquiry at sales@schill.de.

Special construction

Your cable drum is not listed? For special construction please contact the sales department via email at sales@schill.de.

Special colours

All cable drums are available in other colours at an additional charge. Please contact the sales department for more information at sales@schill.de.

Note : All technical information, descriptions and illustrations contained in this catalog may be subject to modifications or errors.

Explanation of the symbols and abbreviated designations for SCHILL model series

Cable qualities

H05VV-F 3G1,5



1 2 3 4 5 6 7 8

1 Purpose

H = harmonised cable

2 Nominal voltage V

05 = 300/500 V

07 = 450/750 V

3 Insulation

V = PVC

R = natural or synthetic rubber

B = synthetic rubber

4 Cable sheath

V = PVC

R = natural or synthetic rubber

N = neoprene rubber

Q = polyurethane

5 Cable type

F = flexible wires for flexible cables

6 Number of wires

7 Protective conductor

G = with green/yellow wire

8 Cable cross section

Schill cable designations

KK = H05VV-F

KG = H05RR-F

KS = H07RN-F

PU = H07BQ-F

(For PU cable standard cable colour yellow, cable printing possible)

Cable types

H05VV-F: Standard version for normal load. Suitable for indoor applications.

H05RR-F: Suitable for connecting devices where the cable is subject to light mechanical loads. Suitable for indoor applications.

H07RN-F: Suitable for connecting devices where the cable is subject to moderate mechanical loads, e.g. for devices in commercial and agricultural work shops. Suitable for dry, damp or wet rooms and for constant use outdoors.

H07BQ-F: Suitable for connecting devices where the cable is subject to moderate mechanical loads and for connecting commercial or agricultural devices, for example. Suitable for constant use outdoors.

Degrees of protection

Code digit 1 - protection against foreign bodies

IP0X	IP1X	IP2X	IP3X	IP4X	IP5X	IP6X
Not protected	Protected against foreign bodies > 50 mm	Protected against foreign bodies > 12,5 mm	Protected against foreign bodies > 2,5 mm	Protected against foreign bodies > 1 mm	Protected against dust	Dust-proof
						

Degrees of protection

Code digit 2 - protection against water

IPX0	IPX1	IPX2	IPX3	IPX4	IPX5	IPX6	IPX7	IPX8
Not protected	Protected against vertically dripping water	Protected against dripping water when tilted	Protected against spraying water	Protected against splashing water	Protected against water jets	Protected against powerful water jets	Protected against intermittent submersion*	Protected against continuous submersion
								

*For GT 310.WS3-IP67: Up to 1 meter water depth and for a maximum of 30 minutes (checked by TÜV-Süd)

Explanation of symbols



Complies with DGUV
203-006 and 203-005
Formerly BGI 608 and 600



Earthed socket
Open



With thermal protection
Thermal protection in accordance with VDE



Machine socket
with self-closing hinged cover



With RCD
Residual current device



CEE socket 3x16A
with self-closing hinged cover



Only to be connected
by a qualified electrician



CEE socket 5x16A
with self-closing hinged cover



CEE socket 5x32A
with self-closing hinged cover

Protection classes



I: Protected by protective conductor connection, all conductive parts are connected to the earth potential.



II: Protective insulation, reinforced or double insulation of the mains supply circuit.

certificate
no. **ET 16057**
dated 21.04.2016

 **DGUV Test**
Prüf- und Zertifizierungsstelle
Elektrotechnik
Fachbereich Energie Textil
Elektro Medieneerzeugnisse

Translation

GS Test Certificate

Name and address of the holder of the certificate: **Schill GmbH & Co. KG**
(customer): **Hirschstrasse 81**
89150 Laichingen

Name and address of the Manufacturer: **Schill GmbH & Co. KG**
Bruckstraße 44
70734 Fellbach

Product designation: **Cable reels**

Type: **GT 235...** (Variants see Annex)
GT 310... (Variants see Annex)
IT 266... (Variants see Annex)

Intended purpose: **To use at the construction- and assembly sites**

Testing based on: **GS-ET 35** Supplementary requirements for the testing and certification of cable reels at the construction- and assembly sites

2011-04

Remarks:

The type tested meets the requirements specified in article 21 para. 1 of the German Product Safety Act.

The holder of the certificate is entitled to affix the GS mark shown overleaf to the products complying with the type tested. At that, the holder of the certificate shall observe the conditions specified overleaf.

The present certificate including the right to affix the GS is valid until: **31.12.2020**

Further provisions concerning the validity, the extension of the validity and other conditions are laid down in the Rules of Procedure for Testing and Certification of January 2015.

Az: 23.010.07 / 14-019-VT01 / Wld /Wi


Dipl.-Ing. Stefan Stommel
Manager of the Certification Body



Deutsche Gesetzliche Unfallversicherung (DGUV) e. V.
Spitzenverband der gewerblichen Berufsgenossenschaften
und der Unfallversicherungsträger der öffentlichen Hand
Vereinsregister-Nr. VR 751 B, Amtsgericht Charlottenburg

DGUV Test Prüf- und Zertifizierungsstelle Elektrotechnik
Fachbereich Energie Textil Elektro Medieneerzeugnisse
Gustav-Heinemann-Ufer 130 • 50968 Köln • Deutschland
Telefon +49 (0)221 3778-6301 • Telefax +49 (0)221 3778-6322

PZB04E
04.14

In any case, the German original shall prevail

Current: 10A	12
<i>Fittings: Flat slip ring, 3-pole</i>	12
<i>Fittings: Flat slip ring, 5-pole</i>	17
Current: 16A	19
<i>Fittings: Flat slip ring, 3-pole</i>	19
<i>Fittings: Flat slip ring, 5-pole</i>	21
<i>Fittings: Flat slip ring, 7-pole</i>	23
<i>Fittings: Flat slip ring, 10-pole</i>	25
<i>Fittings: Flat slip ring, 15-pole</i>	27
<i>Fittings: Flat slip ring, 20-pole</i>	28
Current: 25A	30
<i>Fittings: Brush slip ring, 3-pole</i>	30
<i>Fittings: Brush slip ring, 5-pole</i>	32
Current: 40A	34
<i>Fittings: Brush slip ring, 5-pole</i>	34
Reels with attachments	36
<i>Fittings: Plug connection</i>	36
<i>Fittings: With earthing clamp</i>	40
Reels for data networks	41
Reels for data transfer	42
Reels for eMobility	43
Reels for signal transmission	48
Hose reel	54
Accessories	62
<i>Roller guides</i>	62
<i>Hose reel</i>	64
Drum dimensions	67
Diagrams spring assemblies	80

Current:
Fittings:
Material:

10A
Flat slip ring, 3-pole
Plastic



IP20

EFT 130



- 3-pole flat slip ring, 10A
- for protected installation and attachment
- fuse connection terminal with 10A glass fuse
- without cover for connection housing
- without locking mechanism

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
681 00 303 000	EFT 130.3KK3075	IP20	3	H03VV-F 3G0,75	FT 150 Typ 1	230V~/10A	1000W	2300W	0.80

IP20

EFT 160



- 3-pole flat slip ring, 10A
- for protected installation and attachment
- fuse connection terminal with 10A glass fuse
- cover for connection housing
- without locking mechanism

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
671 00 305 000	EFT 160.5KK3075	IP20	5	H03VV-F 3G0,75	FT 150 Typ 1	230V~/10A	1000W	2300W	0.89
671 00 304 000	EFT 160.4KK310	IP20	4	H05VV-F 3G1,0	FT 150 Typ 1	230V~/10A	1250W	2300W	1.00

Current: 10A
 Fittings: Flat slip ring, 3-pole
 Material: Plastic



IP20

EFT 265



- 3-pole flat slip ring, 16A
- for protected installation and attachment
- fuse connection terminal with 10A glass fuse
- cover for connection housing
- without locking mechanism

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
661 00 308 000	EFT 265.0308	IP20	8	H05VV-F 3G1,5	FT 260 Typ 2	230V~/10A	1800W	2300W	2.29

IP20

EFT 130A



- 3-pole flat slip ring, 10A
- for protected installation and attachment
- fuse connection terminal with 10A glass fuse
- without cover for connection housing
- locking mechanism

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
681 01 303 000	EFT 130A.3KK3075	IP20	3	H03VV-F 3G0,75	FT 150 Typ 1	230V~/10A	1000W	2300W	0.80

Current:
Fittings:
Material:

10A
Flat slip ring, 3-pole
Plastic



IP20

EFT 160A



- 3-pole flat slip ring, 10A
- for protected installation and attachment
- fuse connection terminal with 10A glass fuse
- cover for connection housing
- locking mechanism

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
671 01 305 000	EFT 160A.5KK3075	IP20	5	H03VV-F 3G0,75	FT 150 Typ 1	230V~/10A	1000W	2300W	1.08
671 01 304 000	EFT 160A.4KK310	IP20	4	H05VV-F 3G1,0	FT 150 Typ 1	230V~/10A	1250W	2300W	1.00

IP20

EFT 265A



- 3-pole flat slip ring, 16A
- for protected installation and attachment
- fuse connection terminal with 10A glass fuse
- cover for connection housing
- locking mechanism

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
661 01 308 000	EFT 265A.0308	IP20	8	H05VV-F 3G1,5	FT 260 Typ 2	230V~/10A	1800W	2300W	2.90

Current:
Fittings:
Material:

10A
Flat slip ring, 3-pole
Plastic



IP20

FT 150



- 3-pole flat slip ring, 10A
- fuse connection terminal with 10A glass fuse
- universal holder for ceiling/wall mounting
- locking mechanism which can be deactivated

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
670 00 305 000	FT 150.5KK3075	IP20	5	H03VV-F 3G0,75	FT 150 Typ 1	230V~/10A	1000W	2300W	1.18
670 00 304 000	FT 150.4KK310	IP20	4	H05VV-F 3G1,0	FT 150 Typ 1	230V~/10A	1250W	2300W	1.35



IP20

FT 260



- 3-pole flat slip ring, 16A
- fuse connection terminal with 10A glass fuse
- universal holder for ceiling/wall mounting
- locking mechanism which can be deactivated

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
640 00 300 000	FT 260.0300				FT 260 Typ 2	230V~/10A			2.23
640 00 308 000	FT 260.0308	IP20	8	H05VV-F 3G1,5	FT 260 Typ 2	230V~/10A	1800W	2300W	3.00
640 00 312 000	FT 260.0312	IP20	12	H05VV-F 3G1,0	FT 260 Typ 2	230V~/10A	1000W	2300W	3.10

Current: 10A
 Fittings: Flat slip ring, 3-pole
 Material: Plastic



FT 350



- 3-pole flat slip ring, 16A
- fuse connection terminal with 10A glass fuse
- pivoting wall holder
- rotating ceiling holder as accessory available
- locking mechanism which can be deactivated
- without plug connection

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
660 00 300 000	FT 350.0300				FT 350 Typ 1	230V~/10A			4.51
660 00 315 000	FT 350.0315	IP20	15	H07RN-F 3G1,5	FT 350 Typ 1	230V~/10A	1800W	2300W	7.85

Current: 10A
 Fittings: Flat slip ring, 5-pole
 Material: Plastic



IP20

EFT 265



- 5-pole flat slip ring, 16A
- for protected installation and attachment
- fuse connection terminal with 10A glass fuse
- cover for connection housing
- without locking mechanism

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
661 00 505 000	EFT 265.0505	IP20	5	H05VV-F 5G1,5	FT 260 Typ 2	400V~/10A	2200W	6800W	2.98

IP20

EFT 265A



- 5-pole flat slip ring, 16A
- for protected installation and attachment
- fuse connection terminal with 10A glass fuse
- cover for connection housing
- locking mechanism

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
661 01 505 000	EFT 265A.0505	IP20	5	H05VV-F 5G1,5	FT 260 Typ 2	400V~/10A	2200W	6800W	3.10

Current:
Fittings:
Material:

10A
Flat slip ring, 5-pole
Plastic



IP20

FT 260



- 5-pole flat slip ring, 16A
- fuse connection terminal with 10A glass fuse
- universal holder for ceiling/wall mounting
- locking mechanism which can be deactivated

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
640 00 500 000	FT 260.0500				FT 260 Typ 2	400V~/10A			2.58
640 00 505 000	FT 260.0505	IP20	5	H05VV-F 5G1,5	FT 260 Typ 2	400V~/10A	2200W	6800W	2.80



IP20

FT 350



- 5-pole flat slip ring, 16A
- fuse connection terminal with 10A glass fuse
- pivoting wall holder
- rotating ceiling holder as accessory available
- locking mechanism which can be deactivated
- without plug connection

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
660 00 500 000	FT 350.0500				FT 350 Typ 1	400V~/10A			5.51
660 00 510 000	FT 350.0510	IP20	10	H07RN-F 5G1,5	FT 350 Typ 1	400V~/10A	2400W	6800W	8.05

Current: 16A
 Fittings: Flat slip ring, 3-pole
 Material: Plastic



FT 038 without thermoswitch



- 3-pole flat slip ring, 16A
- locking mechanism which can be deactivated
- without thermoswitch
- pivoting wall holder
- rotating ceiling holder as accessory available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 31 300 000	FT 038.0300.16				FT 038 Typ 2	230V~/16A			9.12
620 31 320 000	FT 038.0320	IP44	20	H07RN-F 3G1,5	FT 038 Typ 2	230V~/16A	1000W	2300W	12.30



FT 038 with thermoswitch



- 3-pole flat slip ring 16A
- locking mechanism which can be deactivated
- thermoswitch
- pivoting wall holder
- rotating ceiling holder as accessory available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 31 325 000	FT 038.0325.16	IP44	25	H05BQ-F 3G1,0	FT 038 Typ 3	230V~/16A	800W	2300W	10.12
620 31 325 001	FT 038.0325.16	IP44	15	H07RN-F 3G2,5	FT 038 Typ 3	230V~/16A	2000W	3800W	12.27

Current:
Fittings:
Material:

16A
Flat slip ring, 3-pole
Sheet steel



FT 046



- 5-pole flat slip ring 16A
- locking mechanism
- flange fastening
- pivoting wall and rotating ceiling holder as accessories available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
630 31 723 000	FT 046.0300.16				FT 046 Typ 3	230V~/16A			20.80
630 31 423 000	FT 046.0333	IP44	33	H07RN-F 3G1,5	FT 046 Typ 3	230V~/16A	800W	3600W	27.14
630 31 325 000	FT 046.0325.16	IP44	25	H07RN-F 3G2,5	FT 046 Typ 3	230V~/16A	2000W	3600W	29.33

Current: 16A
 Fittings: Flat slip ring, 5-pole
 Material: Plastic



FT 038



- 5-pole flat slip ring, 16A
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 32 500 000	FT 038.0500.16				FT 038 Typ 2	400V~/16A			8.42
620 32 515 000	FT 038.0515	IP44	15	H07RN-F 5G1,5	FT 038 Typ 2	400V~/16A	4000W	11kW	12.75
620 32 525 400	FT 038.0525.16	IP44	15	H07RN-F 5G2,5	FT 038 Typ 2	400V~/16A	4500W	11kW	14.32

Current:
Fittings:
Material:

16A
Flat slip ring, 5-pole
Sheet steel



FT 046



- 5-pole flat slip ring 16A
- locking mechanism
- flange fastening
- pivoting wall and rotating ceiling holder as accessories available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
630 32 753 000	FT 046.0500.16				FT 046 Typ 2	400V~/16A			21.50
630 32 453 000	FT 046.0530	IP44	30	H07RN-F 5G1,5	FT 046 Typ 2	400V~/16A	3800W	11kW	28.00

Current:
Fittings:
Material:

16A
Flat slip ring, 7-pole
Plastic



FT 038



- 7-pole flat slip ring, 16A
- locking mechanism which can be deactivated
- cable Ölflex Crane with supporting element
- pivoting wall holder
- rotating ceiling holder as accessory available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 33 715 900	FT 038.0700				FT 038 Typ 1				10.00
620 33 715 000	FT 038.0715	IP44	15	Ölflex 7G1,5	FT 038 Typ 1	400V~/16A	4000W	11kW	15.06
620 33 715 400	FT 038.0715	IP44	15	Ölflex 7G2,5	FT 038 Typ 1	400V~/16A	4000W	11kW	17.06

Current:
Fittings:
Material:

16A
Flat slip ring, 7-pole
Sheet steel



FT 046



- 7-pole flat slip ring 16A
- locking mechanism
- cable Ölflex Crane with supporting element
- flange fastening
- pivoting wall and rotating ceiling holder as accessories available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
630 33 792 000	FT 046.0700.16				FT 046 Typ 1	400V~/16A			24.00
630 33 492 000	FT 046.0725	IP44	25	Ölflex 7G1,5	FT 046 Typ 1	400V~/16A	3800W	11kW	30.00

Current:
Fittings:
Material:

16A
Flat slip ring, 10-pole
Plastic



FT 038



- 10-pole flat slip ring 16A
- locking mechanism which can be deactivated
- cable Ölflex Classic
- pivoting wall holder
- rotating ceiling holder as accessory available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 10 000 000	FT 038.1000				FT 038 Typ 2	400V~/16A			11.00
620 10 010 000	FT 038.1010	IP44	10	Ölflex 10G1,5	FT 038 Typ 2	400V~/16A	4200W	11kW	13.68

Current:
Fittings:
Material:

16A
Flat slip ring, 10-pole
Sheet steel



FT 046



- 10-pole flat slip ring, 16A
- locking mechanism
- cable Ölflex Classic
- flange fastening
- pivoting wall and rotating ceiling holder as accessories available

Notes:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
630 10 000 400	FT 046.1000				FT 046 Typ 2	400V~/16A			20.00
630 20 025 400	FT 046.1020	IP44	20	Ölflex 10G1,5	FT 046 Typ 2	400V~/16A	3800W	11kW	20.00

Current: 16A
Fittings: Flat slip ring, 15-pole
Material: Plastic



FT 038



- 15-pole flat slip ring 16A
- locking mechanism
- flange fastening
- pivoting wall and rotating ceiling holder as accessories available

Notes:
A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 15 000 000	FT 038.1500				FT 038 Typ 1	400V~/16A			12.00

Current:
Fittings:
Material:

16A
Flat slip ring, 20-pole
Plastic



FT 038



- 20-pole flat slip ring 16A
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 20 000 000	FT 038.2000				FT 038 Typ 1	400V~/16A			18.51
620 20 015 000	FT 038.2015	IP44	15	Ölflex 20G1,0	FT 038 Typ 1	400V~/16A	4000W	11kW	17.51

Current:
Fittings:
Material:

16A
Flat slip ring, 20-pole
Sheet steel



FT 046



- 20-pole flat slip ring 16A
- locking mechanism
- flange fastening
- pivoting wall and rotating ceiling holder as accessories available

Notes:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
630 20 000 000	FT 046.2000				FT 046 Typ 2	400V~/16A			24.00
630 20 025 000	FT 046.2025	IP44	25	Ölflex 20G1,0	FT 046 Typ 2	400V~/16A	3800W	11kW	33.00

Current:
Fittings:
Material:

25A
Brush slip ring, 3-pole
Plastic



FT 038



- for higher power ratings
- 3-pole brush slip ring 25A
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
621 31 300 000	FT 038.0300.25				FT 038 Typ 2	230V~			12.51
621 31 325 000	FT 038.0325.25	IP44	15	H07RN-F 3G2,5	FT 038 Typ 2	230V~/25A	2000W	4500W	16.13

Current:
Fittings:
Material:

25A
Brush slip ring, 3-pole
Sheet steel



FT 046



- for higher power ratings
- 3-pole brush slip ring 25A
- locking mechanism and flange fastening
- pivoting wall and rotating ceiling holder as accessories available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
631 31 300 000	FT 046.0300.25				FT 046 Typ 2	230V~/25A			22.33
631 31 325 000	FT 046.0325.25	IP44	25	H07RN-F 3G2,5	FT 046 Typ 2	230V~/25A	2000W	3600W	29.33

Current:
Fittings:
Material:

25A
Brush slip ring, 5-pole
Plastic



FT 038



- for higher power ratings
- 5-pole brush slip ring 25A
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
621 32 500 000	FT 038.0500.25				FT 038 Typ 1	400V~/25A			13.30
621 32 525 000	FT 038.0525.25	IP44	15	H07RN-F 5G2,5	FT 038 Typ 1	400V~/25A	4500W	11kW	18.00

Current:
Fittings:
Material:

25A
Brush slip ring, 5-pole
Sheet steel



FT 046



- for higher power ratings
- 5-pole brush slip ring 25A
- locking mechanism which can be deactivated
- pivoting wall and rotating ceiling holder as accessory available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
631 32 500 000	FT 046.0500.25				FT 046 Typ 2	400V~/25A			24.33
631 32 525 000	FT 046.0525.25	IP44	25	H07RN-F 5G2,5	FT 046 Typ 2	400V~/25A	4000W	11kW	33.33

Current:
Fittings:
Material:

40A
Brush slip ring, 5-pole
Plastic



FT 038 ceiling holder



- for higher power ratings
- 5-pole brush slip ring 40A
- locking mechanism which can be deactivated
- ceiling holder

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
622 32 500 000	FT 038.0500.40-DB				FT 038 Typ 1	400V~/40A			14.96
622 32 515 000	FT 038.0515.40-DB	IP44	15	H07RN-F 5G4,0	FT 038 Typ 1	400V~/40A	6500W	22kW	19.16



FT 038 wall holder



- for higher power ratings
- 5-pole brush slip ring 40A
- locking mechanism which can be deactivated
- pivoting wall holder

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
622 32 500 001	FT 038.0500.40-WB				FT 038 Typ 1	400V~/40A			14.96
622 32 515 001	FT 038.0515.40-WB	IP44	15	H07RN-F 5G4,0	FT 038 Typ 1	400V~/40A	6500W	22kW	21.34

Current:
Fittings:
Material:

40A
Brush slip ring, 5-pole
Sheet steel



FT 046



- for higher power ratings
- 5-pole brush slip ring 40A
- locking mechanism and flange fastening
- pivoting wall and rotating ceiling holder as accessories available

Note:

A H07RN-F or H07BQ-F cable is required for use outdoors and in damp rooms.

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
632 32 500 000	FT 046.0500.40				FT 046 Typ 1	400V~/40A			27.02
632 32 520 000	FT 046.0520.40	IP44	20	H07RN-F 5G4,0	FT 046 Typ 1	400V~/40A	6500W	22kW	36.33

Reels
Current: 10A
Fittings: Plug connection
Material: Plastic



IP20

FT 150



- 3-pole flat slip ring 10A
- fuse connection terminal with 10A glass fuse
- universal holder for ceiling/wall mounting
- locking mechanism which can be deactivated
- plug connection (right-angle Schuko plug and Schuko coupling)

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
670 10 304 000	FT 150.4KK310.S316	IP20	4	H05VV-F 3G1,0	FT 150 Typ 1	230V~/10A	1250W	2300W	1.67

IP20

FT 260



- 3-pole flat slip ring 16A
- fuse connection terminal with 10A glass fuse
- universal holder for ceiling/wall mounting
- locking mechanism which can be deactivated
- plug connection (right-angle Schuko plug and Schuko coupling)

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
640 10 308 000	FT 260.0308.S316	IP20	8	H05VV-F 3G1,5	FT 260 Typ 2	230V~/10A	1800W	2300W	3.66
640 10 312 000	FT 260.0312.S316	IP20	12	H05VV-F 3G1,0	FT 260 Typ 2	230V~/10A	1000W	2300W	3.82

Reels
Current: 10A
Fittings: Plug connection
Material: Plastic



IP20

FT 260.0305-cube MD4



- 3-pole flat slip ring 16A
- fuse connection terminal with 10A glass fuse
- universal holder for ceiling/wall mounting
- locking mechanism which can be deactivated
- 2 cable stoppers
- power cube with 4 Schuko sockets

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
640 00 305 500	FT 260.0305-Cube MD4	IP20	5	H05VV-F 3G2,5	FT 260 Typ 1	230V~/10A	1800W	2300W	3.00

IP20

FT 350.0315.S316



- 3-pole flat slip ring 16A
- fuse connection terminal with 10A glass fuse
- pivoting wall holder
- rotating ceiling holder as accessory available
- locking mechanism which can be deactivated
- plug connection (Schuko plug and Schuko coupling)

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
660 10 315 000	FT 350.0315.S316	IP20	15	H07RN-F 3G1,5	FT 350 Typ 1	230V~/10A	1800W	2300W	7.85

Reels
Current: 10A
Fittings: Plug connection
Material: Plastic



IP20

FT 350.0510.C516



- 5-pole flat slip ring 16A
- fuse connection terminal with 10A glass fuse
- pivoting wall holder
- rotating ceiling holder as accessory available
- locking mechanism which can be deactivated
- plug connection (CEE plug and coupling 16A)

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
660 10 510 000	FT 350.0510.C516	IP20	10	H07RN-F 5G1,5	FT 350 Typ 1	400V~/10A	2400W	6800W	9.32

Reels with attachments
Current: 16A
Fittings: Plug connection
Material: Plastic



FT 038



- 3-pole flat slip ring 16A
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available
- plug connection (Schuko plug and Schuko coupling)

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 31 320 503	FT 038.0320.S316	IP44	15	H07RN-F 3G2,5	FT 038 Typ 2	230V~/16A	1000W	2300W	12.30
620 31 320 502	FT 038.0320.S316	IP44	20	H07RN-F 3G1,5	FT 038 Typ 2	230V~/16A	1000W	2300W	12.30



FT 038.0515.C516



- 5-pole flat slip ring 16A
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available
- plug connection (CEE plug and coupling 16A)

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 10 515 000	FT 038.0515.C516	IP44	15	H07RN-F 5G1,5	FT 038 Typ 2	400V~/16A	4000W	11kW	12.75

Reels
Current:
Fittings:
Material:

with attachments
 16A
With earthing clamp
 Plastic



Earthing drums



- for earthing purposes
- earthing clamp
- universal holder for FT 260 series
- ceiling holder as accessory as of model FTE 350 optionally available
- locking mechanism which can be deactivated
- cable color H07V-K: yellow/green
- cable color H07RN-F: black

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
641 00 110 000	FTE 260.0110.H07VK		10	H07V-K 1x10	FT 260 Typ 2				3.46
641 00 210 000	FTE 260.0110.H07RN		8	H07RN-F 1x10	FT 260 Typ 2				4.02
641 00 206 000	FTE 260.0616.H07VK		10	H07V-K 1x16	FT 260 Typ 2				3.46
660 00 115 000	FTE 350.0115.H07VK		15	H07V-K 1x10	FT 350 Typ 1				7.00
660 00 215 000	FTE 350.0115.H07RN		15	H07RN-F 1x10	FT 350 Typ 1				7.69
660 00 214 000	FTE 350.1416.H07VK		14	H07V-K 1x16	FT 350 Typ 1				7.00
660 00 210 000	FTE 350.0110.H07RN		10	H07RN-F 1x16	FT 350 Typ 1				7.69
620 31 120 000	FTE 038.0120.H07VK		20	H07V-K 1x10	FT 038 Typ 2				10.25
620 31 220 000	FTE 038.0120.H07RN		20	H07RN-F 1x10	FT 038 Typ 2				11.07
620 31 120 400	FTE 038.0120.H07VK		20	H07V-K 1x16	FT 038 Typ 2				10.25
620 31 220 400	FTE 038.0120.H07RN		18	H07RN-F 1x16	FT 038 Typ 2				11.07
630 31 230 000	FTE 046.3016.H07VK		30	H07V-K 1x16	FT 046 Typ 3				27.00
630 31 130 400	FTE 046.0130.H07RN		30	H07RN-F-1x16	FT 046 Typ 3				27.00

Reels
Current: 16A
Fittings: Plug connection
Material: Plastic



FT 038.1205-LAN-cube MD3 **NEW**



- 5-pole slip ring 16A
- data slip ring
- data transmission: 100 Mbits/Ethernet
- application: 100 BASE-TX+power
- 8 m extension cable Hybrid
- power cube with 3 machine sockets and RJ45 plug
- 2 m cable for permanent connection
- locking device can be turned off
- wall bracket for pivoted mounting
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 06 000 400	FT 038.1205.LAN-Cube MD3	IP20	8		FT 038 Typ 2	230V~/16A	1000W	3680W	9.47

Reels
Fittings:
Material:

for data transfer
data slip ring
Plastic



IP20

FT 150-LAN^{NEW}



- data slip ring
- data transmission: 1GBits/s Ethernet
- application: 100BASE-TX / 1000BASE-T
- 5 m extension cable with RJ45 plug; cable color blue
- RJ45 socket for connection lead
- locking device can be turned off
- without cable connection
- universal holder for wall/ceiling mounting

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
670 00 125 000	FT 150.1205.LAN	IP20	5		FT 150 Typ 1				1.35

IP20

FT 260-LAN^{NEW}



- data slip ring
- data transmission: 1GBits/s Ethernet
- application: 100BASE-TX / 1000BASE-T
- 10 m extension cable with RJ45 plug; cable color blue
- RJ45 socket for connection lead
- locking device can be turned off
- without cable connection
- universal holder for wall/ceiling mounting

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
640 00 121 000	FT 260.1210.LAN	IP20	10		FT 260 Typ 2				2.23

Reels
Current:
Fittings:
Material:

for eMobility
16A
without electronics
plastic



IP42

FT 260.0416.E00.0520.0103-0000 **NEW**



- cable reel for eMobility
- 4-pole flat slip ring
- locking mechanism which can be deactivated
- thermal protection
- 5 m extension cable (3G2,5+1x0,5 qmm) with type 2 charging socket 16A
- 2 m connecting cable (3G2,5+1x0,5 qmm) with type 2 charging connector 16A (on request also for direct connection without plug)
- universal holder for wall or ceiling mounting

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
640 90 405 000	FT 260.0416.E00.0520.0103-0000	IP42	5	3G2,5+1x0,5qmm	FT 260 Typ 2	230V~/16A	2200W	3600W	4.43

IP42

FT 350.0416.E00.0820.0103-0000 **NEW**



- cable reel for eMobility
- 4-pole flat slip ring
- locking mechanism which can be deactivated
- thermal protection
- 8 m extension cable (3G2,5+1x0,5 qmm) with type 2 charging socket 16A
- 2 m connecting cable (3G2,5+1x0,5 qmm) with type 2 charging connector 16A (on request also for direct connection without plug)
- swivel wall mounting bracket
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
660 90 412 000	FT 350.0416.E00.0820.0103-0000	IP42	8	3G2,5+1x0,5qmm	FT 350 Typ 1	230V~/16A	2200W	3600W	7.82

Reels
Current:
Fittings:
Material:

for eMobility
 16A
without electronics
plastic



IP42

FT 350.0616.E00.0820.0203-0000 **NEW**



- cable reel for eMobility
- 6-pole flat slip ring
- locking mechanism which can be deactivated
- thermal protection
- 8 m charging cable (5G2,5+1x0,5 qmm) with type 2 charging socket 16A
- 2 m connecting cable (5G2,5+1x0,5 qmm) with type 2 charging connector 16A (on request also for direct connection without plug)
- swivel wall mounting bracket
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
660 90 610 000	FT 350.0616.E00.0820.0203-0000	IP42	8	5G2,5+1x0,5qmm	FT 350 Typ 1	400V~/16A	4200W	11kW	8.87



FT 038.0616.E00.0820.0203-0000 **NEW**



- cable reel for eMobility
- 6-pole flat slip ring
- axle with ball bearings
- locking mechanism which can be deactivated
- thermal protection
- 8 m extension cable (5G2,5+1x0,5 qmm) with type 2 charging socket 16A
- 2 m connection cable (5G2,5+1x0,5 qmm) with type 2 charging connector 16A (on request also for direct connection without plug)
- swivel wall mounting bracket
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 90 615 000	FT 038.0616.E00.0820.0203-0000	IP44	8	5G2,5+1x0,5qmm	FT 038 Typ 2	400V~/16A	11kW	11kW	13.36

Reels
Current:
Fittings:
Material:

for eMobility
32A
without electronics
plastic



FT 038.1032.E00.0820.0304-0000 **NEW**



- cable reel for eMobility
- 10-pole flat slip ring
- axle with ball bearings
- locking mechanism which can be deactivated
- 8 m extension cable (5G6,0+1x0,5 qmm) with type 2 charging socket 32A
- 2 m connection cable (5G6,0+1x0,5 qmm) with type 2 charging connector 32A (on request also for direct connection without plug)
- swivel wall mounting bracket
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 90 010 000	FT 038.1032.E00.0820.0304-0000	IP44	8	5G6,0+1x0,5qmm	FT 038 Typ 1	400V~/32A	22kW	22kW	15.36

Reels
Current:
Fittings:
Material:

for eMobility
16A
with electronics
plastic



IP42

FT 260.0416.I02.0520.0101-0000 **NEW**



- cable reel for eMobility
- 4-pole flat slip ring
- integrated charging electronics
- thermal protection
- locking mechanism which can be deactivated
- 5 m extension cable (3G2,5+1x0,5 qmm) with type 2 charging socket 16A
- 2 m connecting cable H07RN-F 3G2,5 without plug connection
- universal holder for wall or ceiling mounting

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
640 91 405 000	FT 260.0416.I02.0520.0101-0000	IP42	5	3G2,5+1x0,5qmm	FT 260 Typ 2	230V~/16A	2200W	3600W	4.43



IP42

FT 350.0416.I02.0820.0101-0000 **NEW**



- cable reel for eMobility
- 4-pole flat slip ring
- integrated charging electronics
- thermal protection
- locking mechanism which can be deactivated
- 8 m extension cable (3G2,5+1x0,5 qmm) with type 2 charging socket 16A
- 2 m connecting cable H07RN-F 3G2,5 without plug connection
- swivel wall mounting bracket
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
660 91 405 000	FT 350.0416.I02.0820.0101-0000	IP42	8	3G2,5+1x0,5qmm	FT 350 Typ 1	230V~/16A	2200W	3600W	8.87

Reels
Current:
Fittings:
Material:

for eMobility
16A
with electronics
plastic



FT 038.0516.I02.0820.0205-0000 **NEW**



- cable reel for eMobility
- 5-pole flat slip ring
- integrated charging electronics
- thermal protection
- axle with ball bearings
- locking mechanism which can be deactivated
- 8 m extension cable (5G2,5+1x0,5 qmm) with type 2 charging socket 16A
- 2 m connection cable H07RN-F 5G2,5 without connection plug
- swivel wall mounting bracket
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 91 615 000	FT 038.0616.I02.0820.0205-0000	IP44	8	5G2,5+1x0,5qmm	FT 046 Typ 2	400V~/16A	11kW	11kW	12.75



FT 038.0516.I03.0820.0205-0000 **NEW**



- cable reel for eMobility
- 5-pole flat slip ring
- integrated charging electronics
- thermal protection
- axle with ball bearings
- DC residual current sensor 6mA
- locking mechanism which can be deactivated
- 8 m extension cable (5G2,5+1x0,5 qmm) with type 2 charging socket
- 2 m connection cable H07RN-F 5G2,5 without plug connection
- swivel wall mounting bracket
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 92 615 000	FT 038.0616.I03.0820.0205-0000	IP44	8	5G2,5+1x0,5qmm	FT 046 Typ 2	400V~/16A	11kW	11kW	12.75

Reels

Current:

Fittings:

Material:

for signal transmission

2A

Data slip ring, 6-pole

Plastic



FT 038



- 6-pole data slip ring
- for signal transfer up to 230V max. 2A per ring
- terminals in the distribution box
- locking device can be turned off
- without connection and pull out cable
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 06 000 000	FT 038.0600				FT 038 Typ 3				8.00

Reels
Current:
Fittings:
Material:

for signal transmission
2A
Data slip ring, 12-pole
Plastic



FT 038



- 12-pole data slip ring
- for signal transfer up to 230V max. 2A per ring
- terminals in the distribution box
- locking device can be turned off
- without connection and pull out cable
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 12 000 000	FT 038.1200				FT 038 Typ 2				8.00

Reels
Current:
Fittings:
Material:

for signal transmission
2A
Data slip ring, 12-pole
Sheet steel



FT 046



- 12-pole data slip ring
- for signal transfer up to 230V max. 2A per ring
- terminals in the distribution box
- locking device can be turned off
- without connection and pull out cable
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
630 12 000 000	FT 046.1200				FT 046 Typ 3				20.00

Reels
Current:
Fittings:
Material:

for signal transmission
2A
Data slip ring, 18-pole
Plastic



FT 038



- 18-pole data slip ring
- for signal transfer up to 230V max. 2A per ring
- terminals in the distribution box
- locking device can be turned off
- without connection and pull out cable
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 18 000 000	FT 038.1800				FT 038 Typ 1				8.00

Reels

Current:

Fittings:

Material:

for signal transmission

2A

Data slip ring, 18-pole

Sheet steel



FT 046



- 18-pole data slip ring
- for signal transfer up to 230V max. 2A per ring
- terminals in the distribution box
- locking device can be turned off
- without connection and pull out cable
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
630 18 000 000	FT 046.1800				FT 046 Typ 2				20.00

Reels

Current:

Fittings:

Material:

for signal transmission

2A

Data slip ring, 24-pole

Plastic



FT 038



- 24-pole data slip ring
- for signal transfer up to 230V max. 2A per ring
- terminals in the distribution box
- locking device can be turned off
- without connection and pull out cable
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Protection class	Cable (m)	Cable type	Spring pack	Nominal voltage	Cable power coiled	Cable power uncoiled	Weight (kg)
620 24 000 000	FT 038.2400				FT 038 Typ 1				8.00

Hose reel
Operating pressure: 10-15 bar
Nominal 4-6 mm
Material: Plastic



EST 160



- for attachment to work benches, etc.
- operating pressure: 10 bar
- air connection: R 1/4" external
- without locking mechanism

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
663 04 030 000	EST 160.0403	3 m NW4	R 1/4" external		FT 150 Typ 1	1.28

EST 265



- for attachment to work benches, etc.
- operating pressure: 10 bar
- air connection: R 1/4" external
- without locking mechanism

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
664 06 080 000	EST 265.0608	6,5 m NW6	R 1/4" external		FT 260 Typ 2	3.02

Hose reel
Operating pressure: 10-15 bar
Nominal 4-6 mm
Material: Plastic



EST 160A



- for attachment to work benches, etc.
- operating pressure: 10 bar
- air connection: R 1/4" external
- with locking mechanism (A)

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
663 04 031 000	EST 160A.0403	3 m NW4	R 1/4" external		FT 150 Typ 1	1.28

EST 265A



- for attachment to work benches, etc.
- operating pressure: 10 bar
- air connection: R 1/4" external
- with locking mechanism (A)

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
664 06 081 000	EST 265A.0608	6,5 m NW6	R 1/4" external		FT 260 Typ 2	3.02

Hose reel

Operating pressure: 10-15 bar

Nennweite: 6-13 mm

Material: Plastic



ST 150



- operating pressure: 10 bar
- air connection: R 1/4" external
- locking mechanism which can be deactivated
- universal holder for wall and ceiling mounting

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
635 04 030 000	ST 150	3 m NW4	R 1/4" external		FT 150 Typ 1	1.28

ST 260



- operating pressure: 10 bar
- air connection: R 1/4" external
- locking mechanism which can be deactivated
- universal holder for wall and ceiling mounting

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
645 06 080 000	ST 260	6,5 m NW6	R 1/4" external		FT 260 Typ 2	2.44

Hose reel

Operating pressure: 10-15 bar

Nennweite: 6-13 mm

Material: Plastic



ST 350



- operating pressure: 15 bar
- air connection: R 1/4" external
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
665 06 100 000	ST 350.0610	10 m NW6	R 1/4" external		FT 350 Typ 1	7.37

Hose reel

Operating pressure: 10-15 bar

Nennweite: 6-13 mm

Material: Plastic



ST 038



- operating pressure: 15 bar
- connection for supply line: R 1/2"
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
625 09 120 000	ST 038.0912	12 m NW9	R 3/8" internal		FT 038 Typ 2	13.12
625 06 150 000	ST 038.0615	15 m NW6	R 1/4" internal		FT 038 Typ 2	12.51
625 13 090 000	ST 038.1309	9 m NW13	R 1/2" internal		FT 038 Typ 2	11.62

Hose reel

Operating pressure: 10-15 bar

Nennweite: 6-13 mm

Material: Sheet steel



ST 046



- operating pressure: 15 bar
- connection for supply line: R 1/2"
- locking mechanism
- flange fastening
- rotating ceiling holder and pivoting wall holder as accessories

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
635 06 250 000	ST 046.0625	25 m NW6	R 1/4" internal		FT 046 Typ 3	27.09
635 09 200 000	ST 046.0920	20 m NW9	R 3/8" internal		FT 046 Typ 3	28.16
635 13 150 000	ST 046.1315	15 m NW13	R 1/2" internal		FT 046 Typ 2	28.98

Hose reel
Operating pressure: 180-225 bar
Nennweite: 6-10 mm
Material: Plastic



ST 038HD.1010



- operating pressure: 180 bar
- connection for supply line: M16x1.5 internal
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
626 09 100 000	ST 038HD.1010	10 m NW10	M16x1,5 internal		FT 038 Typ 1	13.12

ST 038HD.0615



- operating pressure: 225 bar
- connection for supply line: M16x1.5 internal
- locking mechanism which can be deactivated
- pivoting wall holder
- rotating ceiling holder as accessory available

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
626 06 150 000	ST 038HD.0615	15 m NW6	M16x1,5 internal		FT 038 Typ 1	13.12

Hose reel
Operating pressure: 180-225 bar
Nennweite: 6-10 mm
Material: Sheet steel



ST 046HD.1015



- operating pressure: 225 bar
- connection for supply line: M16x1.5 internal
- flange fastening and locking mechanism
- rotating ceiling holder and pivoting wall all holder as accessories available

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
636 09 150 000	ST 046HD.1015	15 m NW10	M16x1,5 internal		FT 046 Typ 1	26.00

ST 046HD.0620



- operating pressure: 225 bar
- flange fastening and locking mechanism
- connection for supply line: M16x1.5 internal
- rotating ceiling/wall holder as accessory available

Order No.	Item	Tube	Hose	Operating pressure (bar)	Spring pack	Weight (kg)
636 06 200 000	ST 046HD.0620	20 m NW6	M16x1,5 internal		FT 046 Typ 1	28.00

Roller guides



Stand-alone roller yoke for easy cable guidance in the case of long working distances. The roller guide should be installed in places where the cable would run over edges. This helps to prevent excessive wear and a reduction in spring-back force. The roller guide is to be fastened in place with two M6 screws (hole spacing 59,9 mm). Deflection of the extension cable by an angle of 90° or more is to be avoided.

Order No.	Item	Version		Weight (kg)
600 00 010 000	Roller guides			0.20

Mounted plug connections...



Only in conjunction with cable reels.

Order No.	Item	Version		Weight (kg)
91 020 000	Insertion connection S 316	Earthed plug and coupling		0.12
91 045 000	Insertion connection C316	CEE-plug and -socket	2-pole + E, 16A, 230V	0.40
91 050 000	Insertion connection C516	CEE-plug and coupling	4-pole+E, 16A, 400V	0.40
91 060 000	Insertion connection C532	CEE-plug and coupling	4-pole+E, 32A, 400V	0.54
91 070 000	Suspended coupling 3/316	Earthed plug with 3x suspended	coupling (not for FT 50)	0.60

Ceiling holder for FT 350 - FT 046



Order No.	Item	Version		Weight (kg)
600 00 040 000	DB 350	FT 350, swivel range 360°		0.70
600 00 020 000	DB 038	FT 038, rotates 360°		0.40
600 00 050 000	DB 046	FT 046, rotates 360°		2.80

Wall holder for FT 350 - FT 046



Order No.	Item	Version		Weight (kg)
600 00 060 000	WB 046	FT/ST 046, pivots 88°		2.80
600 00 030 000	WB 038/350	FT/ST 038/350, pivots 88°		1.04

Roller guide for hoses



Stand-alone roller yoke for easy hose guidance in the case of long working distances. The roller guide should be installed in places where hoses would run over edges. This helps to prevent excessive wear and a reduction in spring-back force. The roller guide is to be fastened in place with two M6 screws (hole spacing 2.36 inch). Deflection of the extension hose by an angle of 90° or more is to be avoided.

Order No.	Item	Version		Weight (kg)
600 00 010 000	Roller guides			0.20

Blow gun with quick coupling for ST 260 - ST 038



Order No.	Item	Version		Weight (kg)
98 900 000	Blow gun	ST 260 with quick-release coupling		0.26
98 910 000	Blow gun	ST 350, ST 038	with quick-release coupling	0.26

Ceiling holder for ST 350 - ST 046




Order No.	Item	Version		Weight (kg)
600 00 040 000	DB 350	FT 350, swivel range 360°		0.70
600 00 020 000	DB 038	FT 038, rotates 360°		0.40
600 00 050 000	DB 046	FT 046, rotates 360°		2.80

Wall holder for ST 350 - ST 046




Order No.	Item	Version		Weight (kg)
600 00 060 000	WB 046	FT/ST 046, pivots 88°		2.80
600 00 030 000	WB 038/350	FT/ST 038/350, pivots 88°		1.04

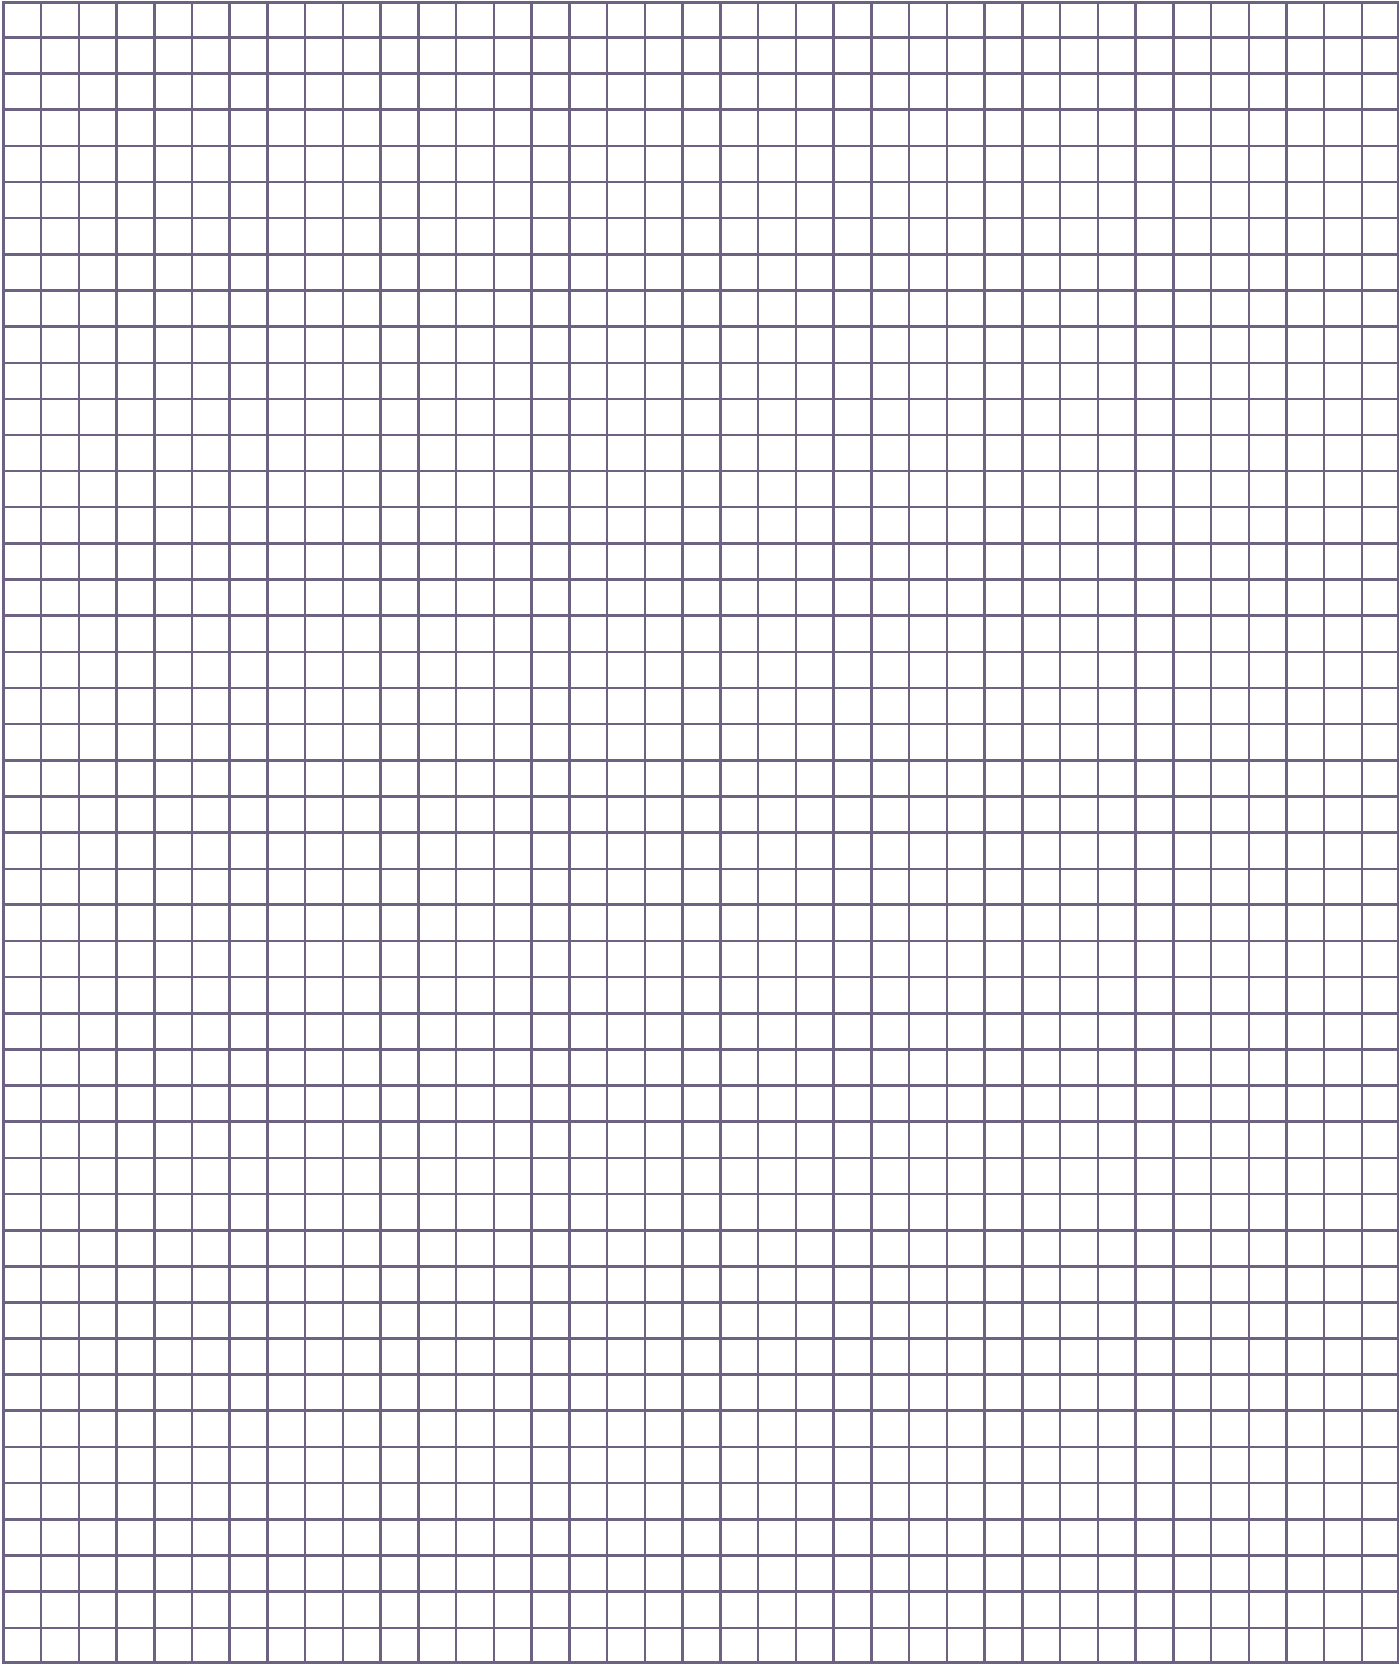


Drum dimensions




EFT 130

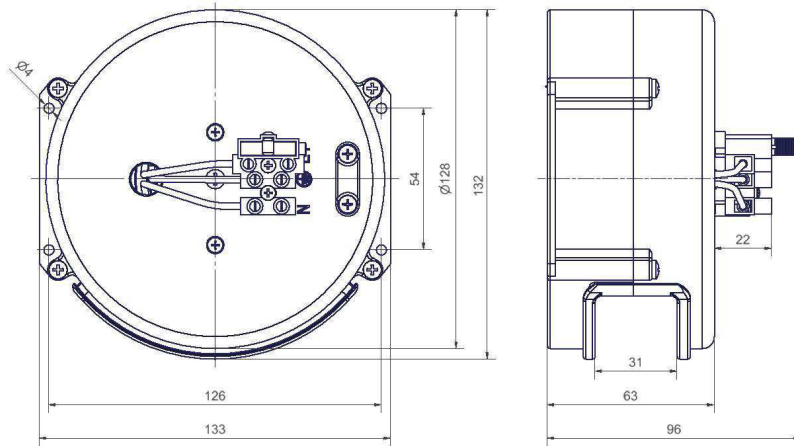


EFT 160

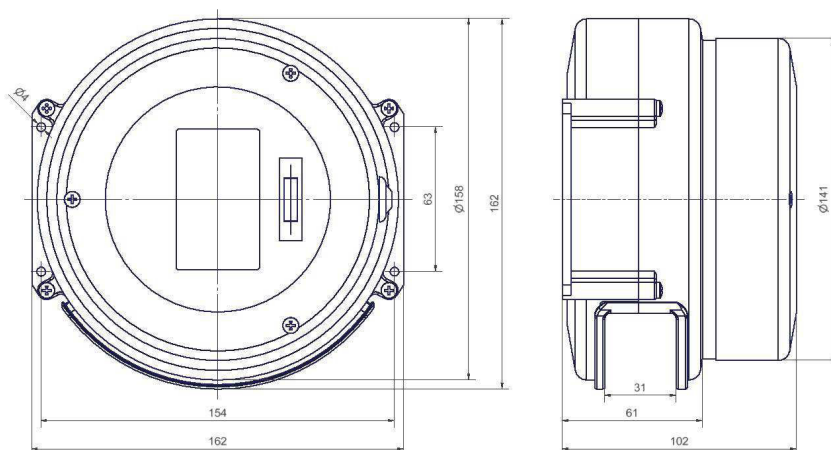

EFT 265

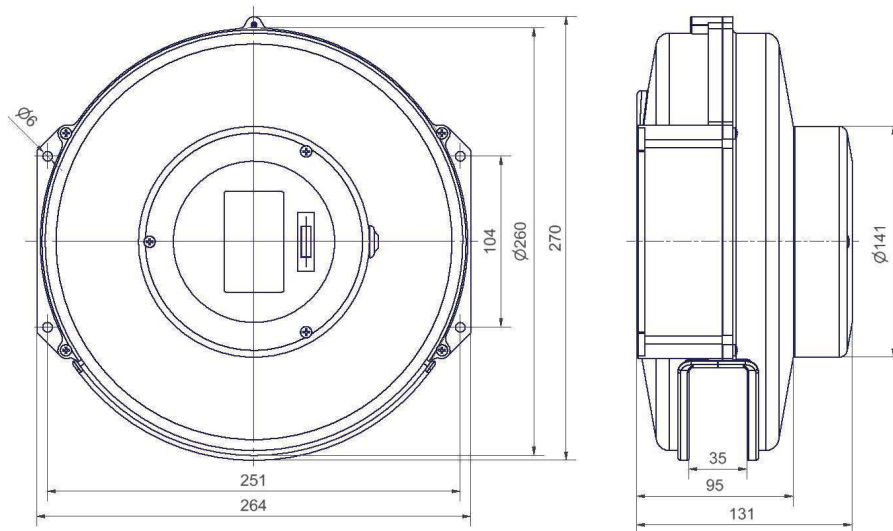


FT 150

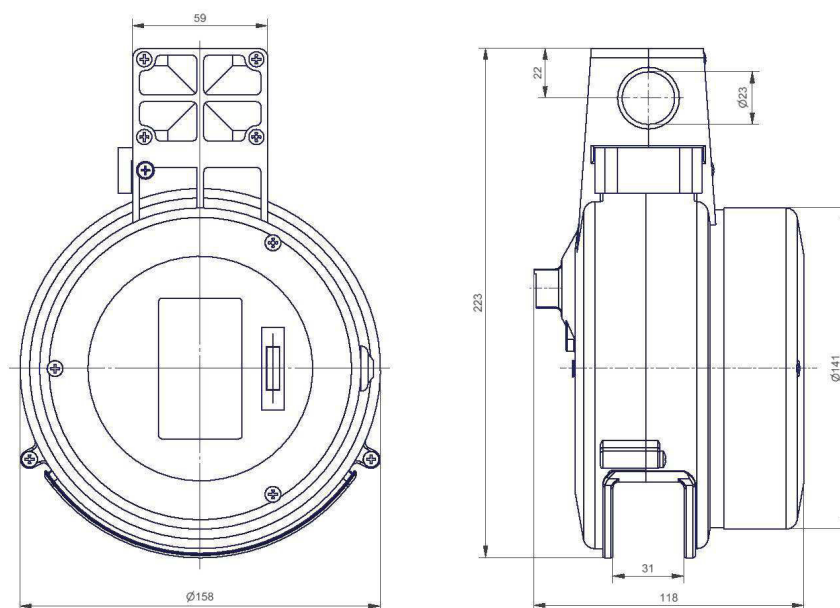


Drum dimensions



FT 260

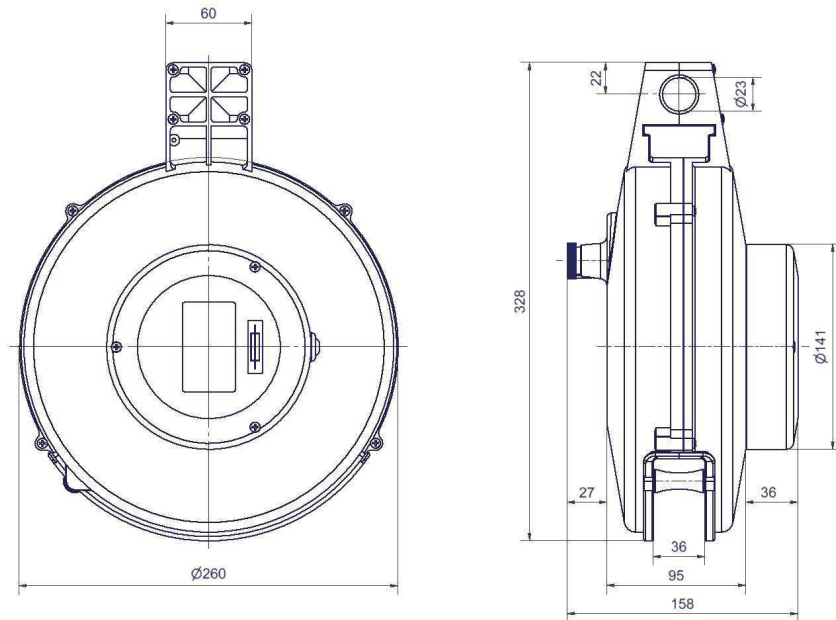


FT 350

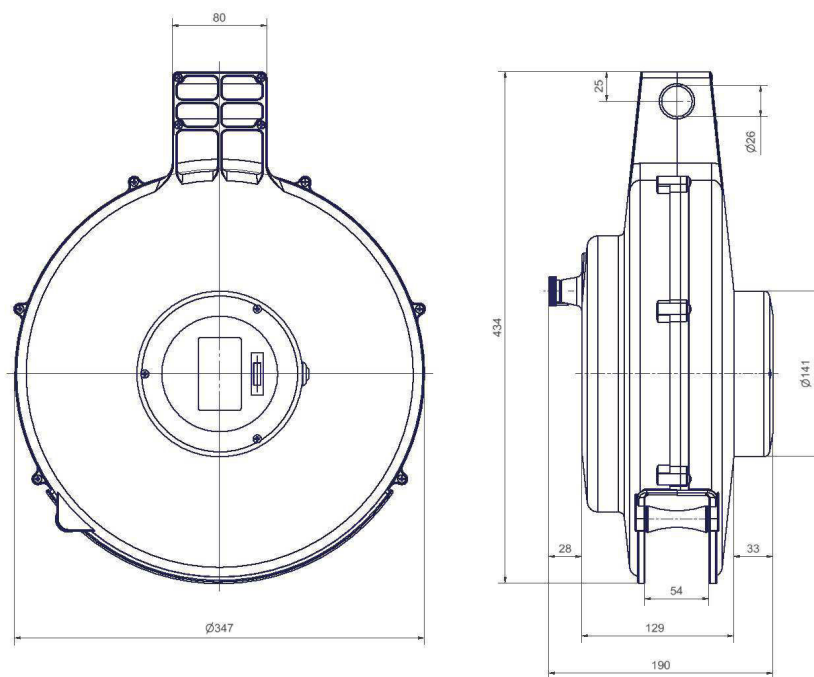


Drum dimensions



FT 038 (3 + 5 pole 16A)

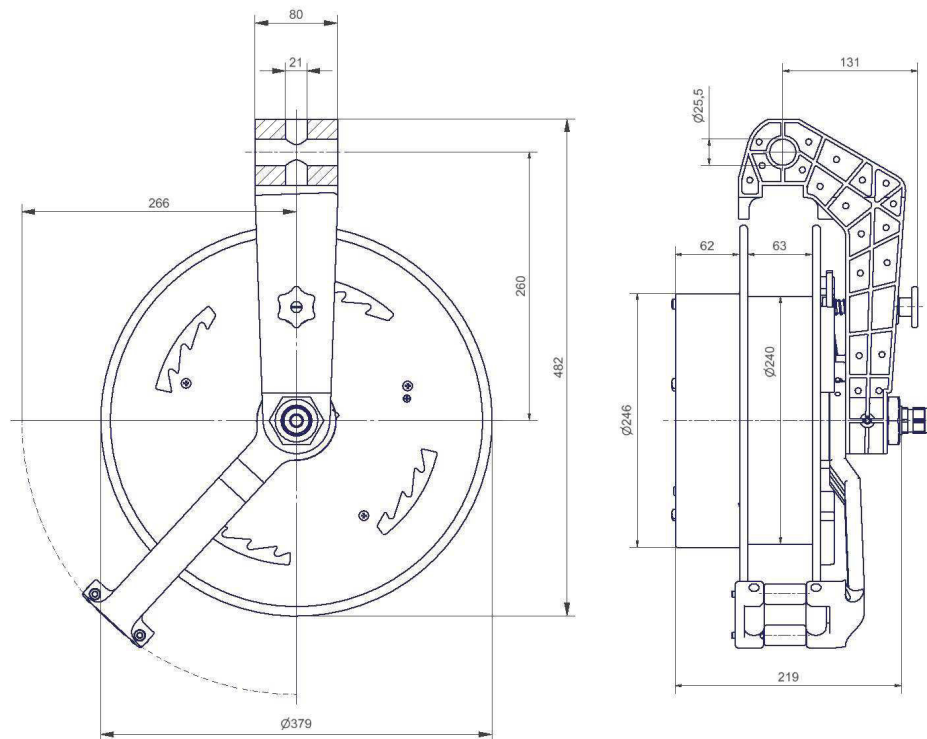


FT 038 (3 pole 25A)

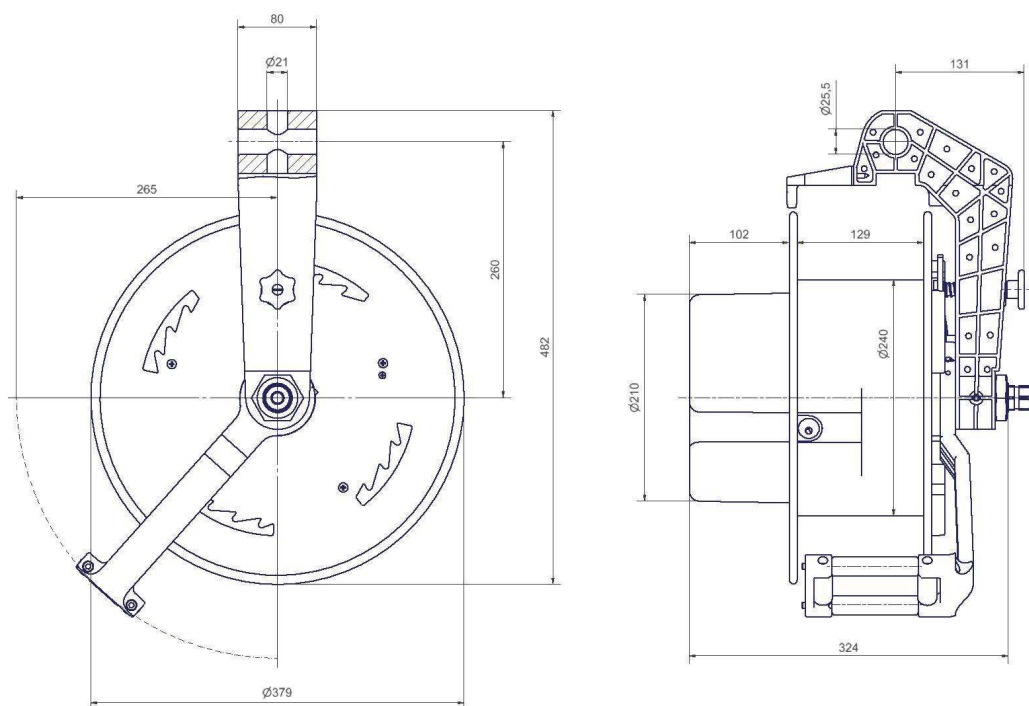


Drum dimensions



FT 038 (7 + 10 pole 16A)

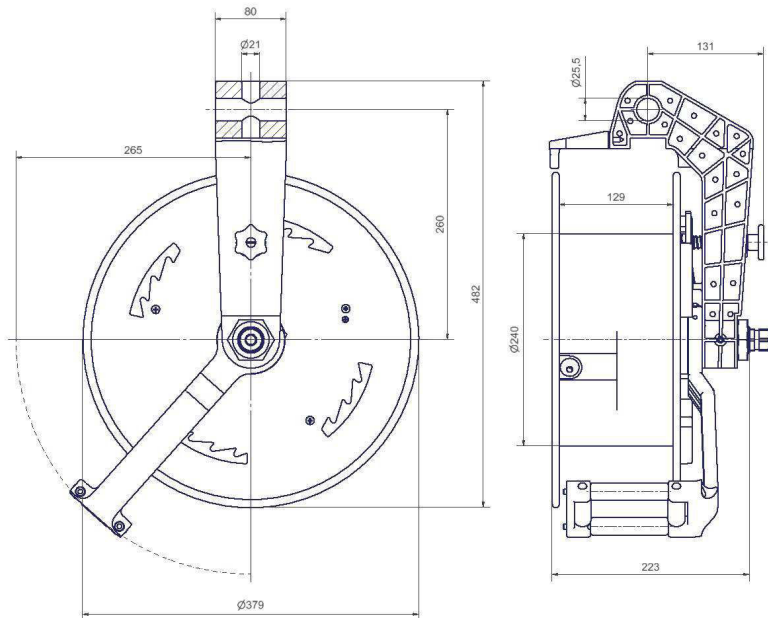


FT 038 (15 + 20 pole 16A)

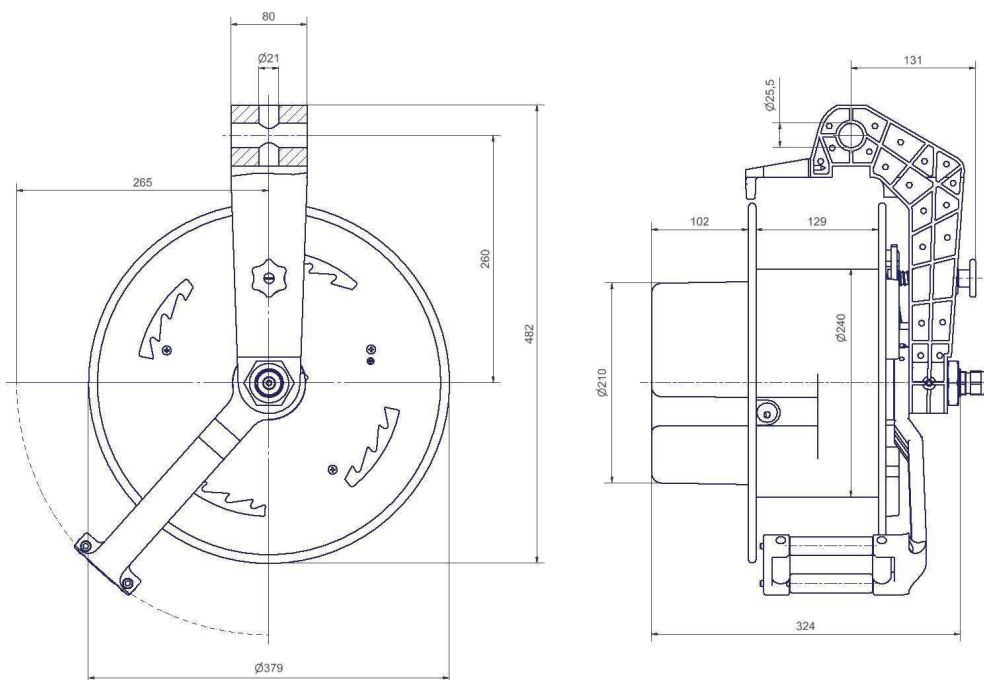


Drum dimensions



FT 038 (6 + 12 pole 2A)

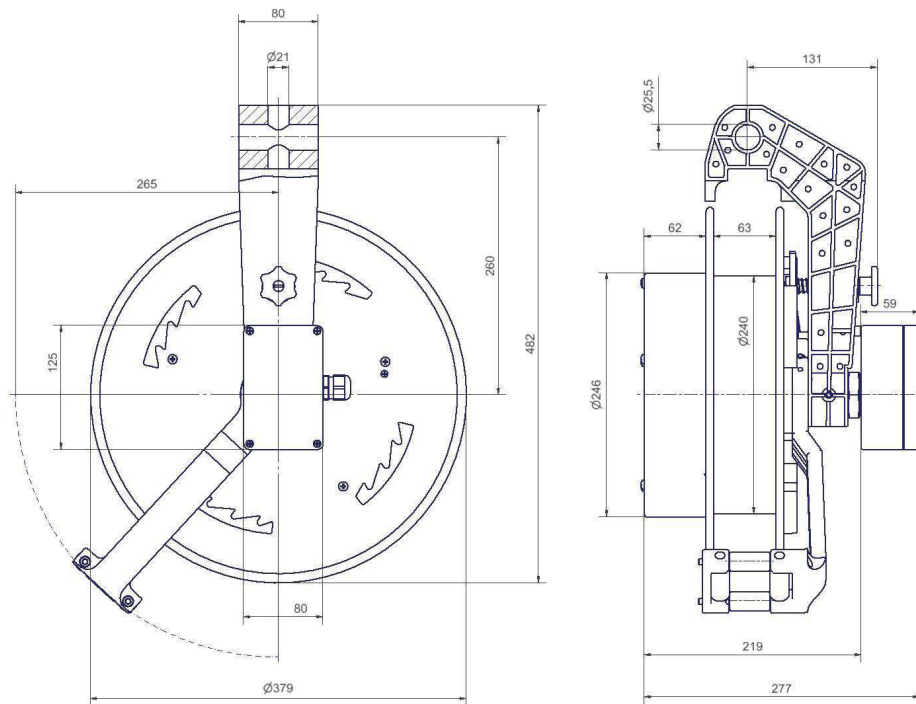


FT 038 (18 + 24 pole 2A)

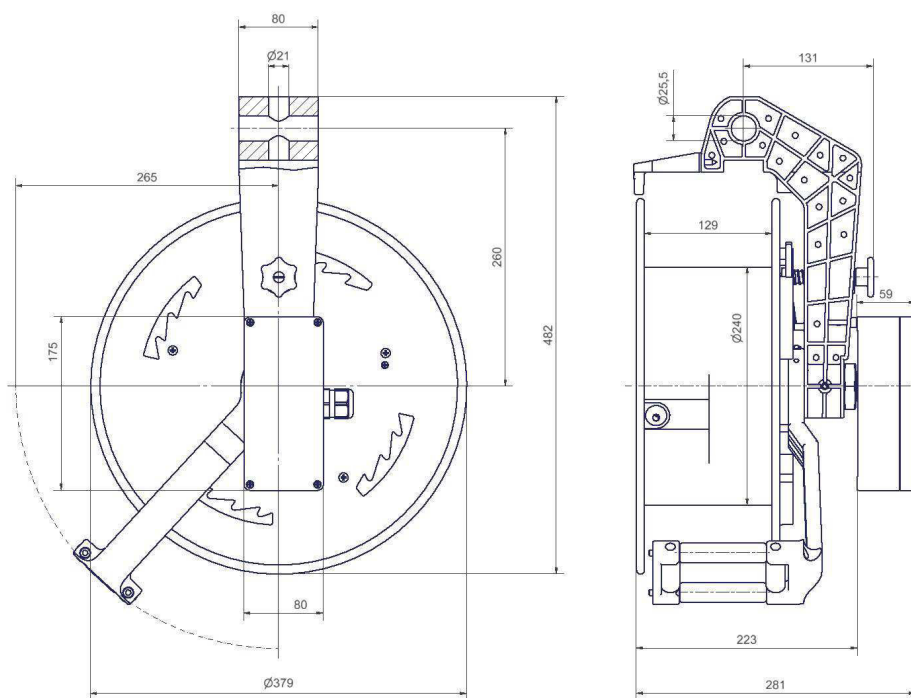


Drum dimensions

FT 038 (5 pole 40A DB)

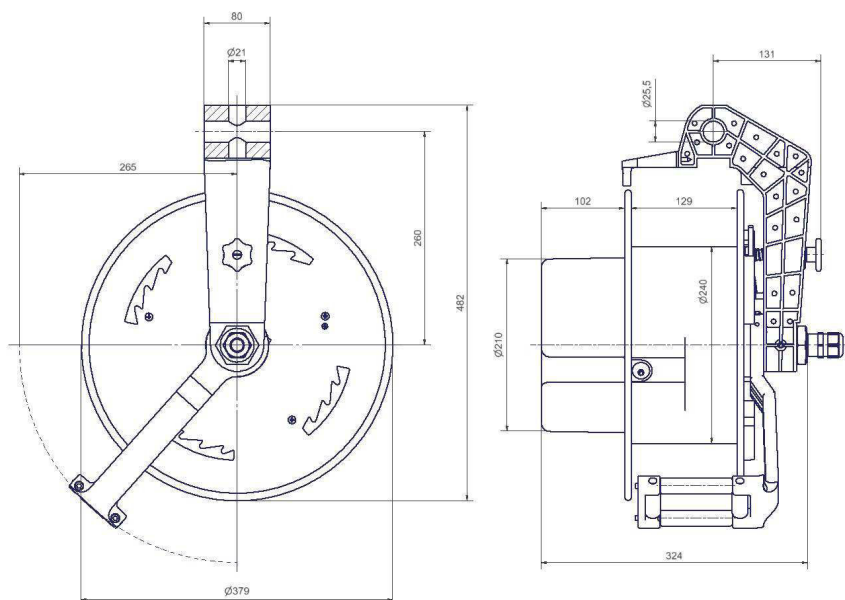


FT 038 (5 pole 40A WB)

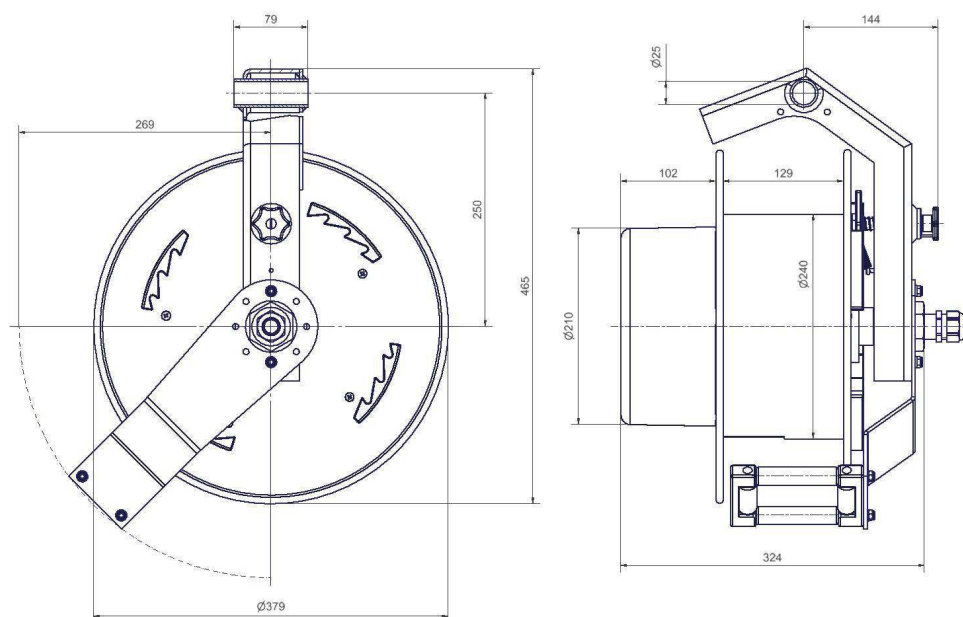


Drum dimensions



FT 046 (3+5 pole 16A)

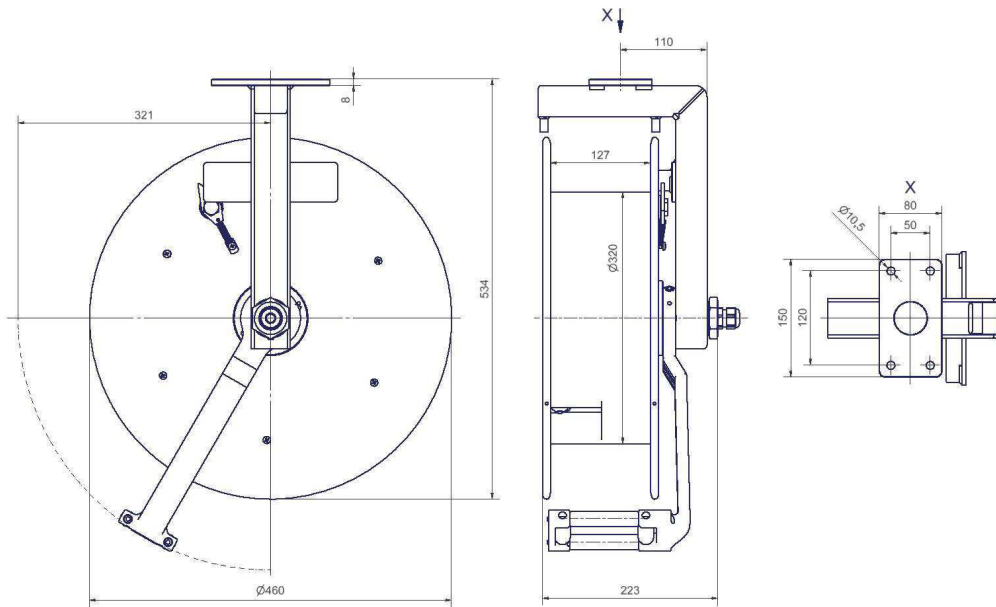


FT 046 (3 pole 25A)

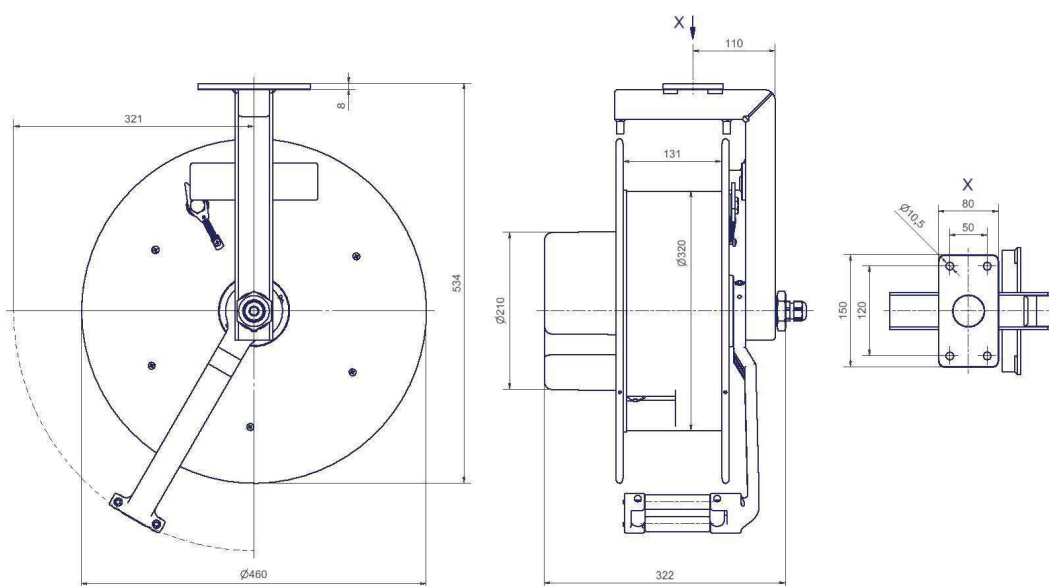


Drum dimensions



FT 046 (7 + 10 pole 16A)

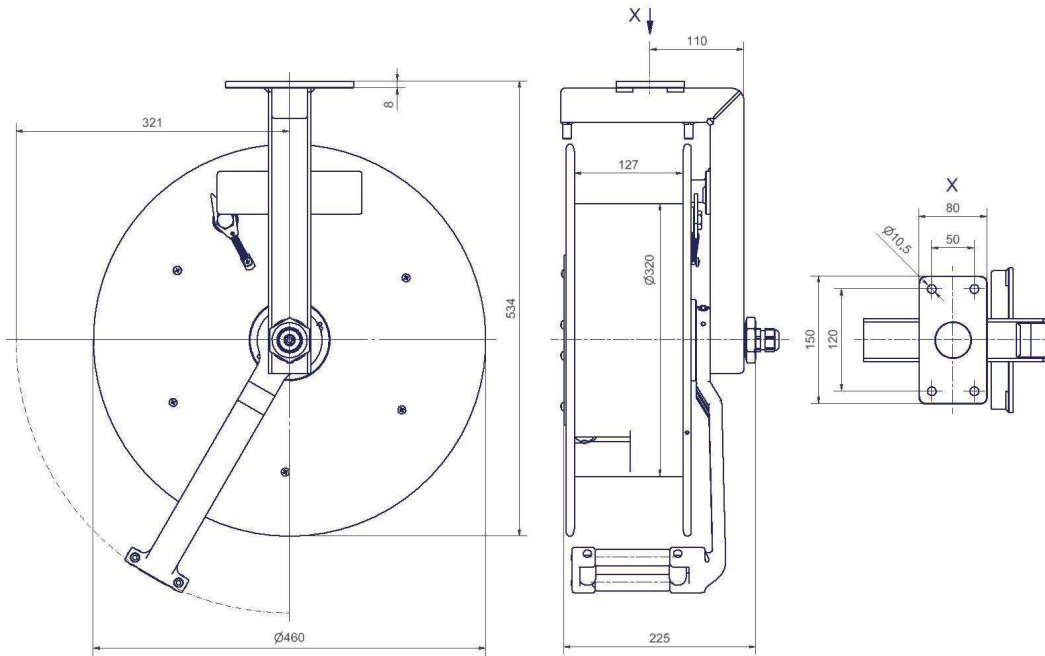


FT 046 (15 + 20 pole 16A)

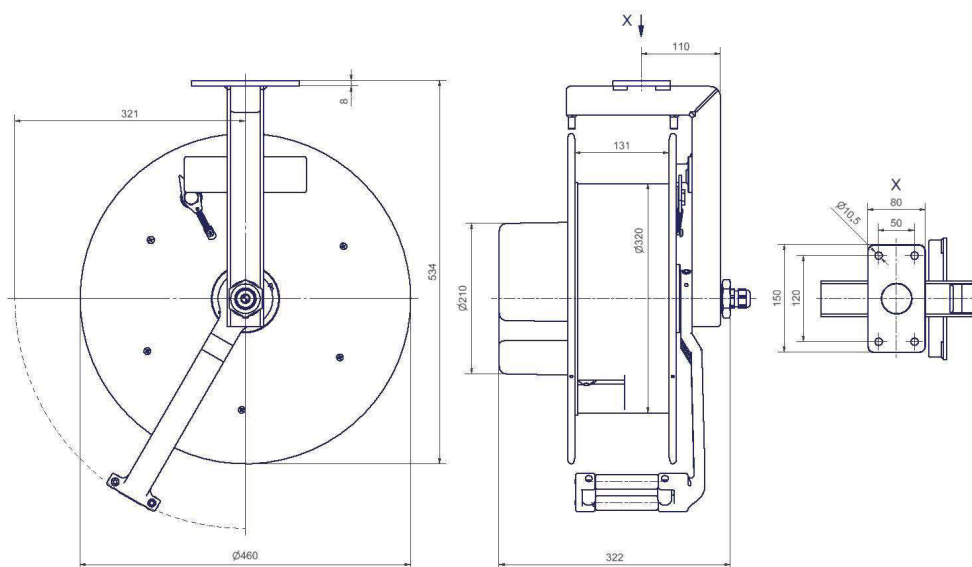


Drum dimensions




FT 046 (6 + 12 pole 2A)

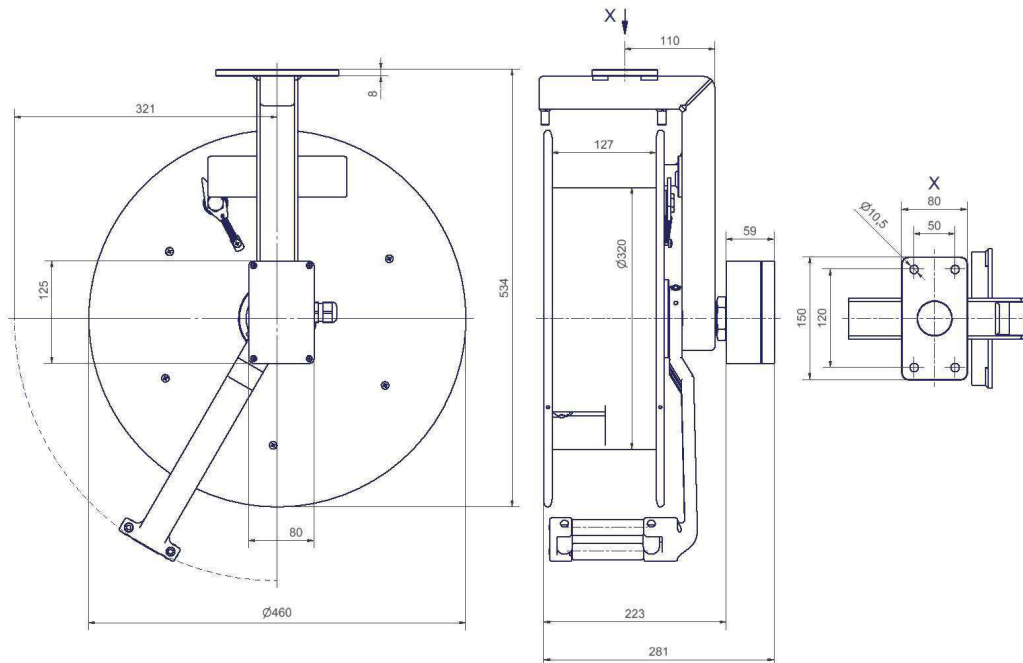


FT 046 (18 + 24 pole 2A)

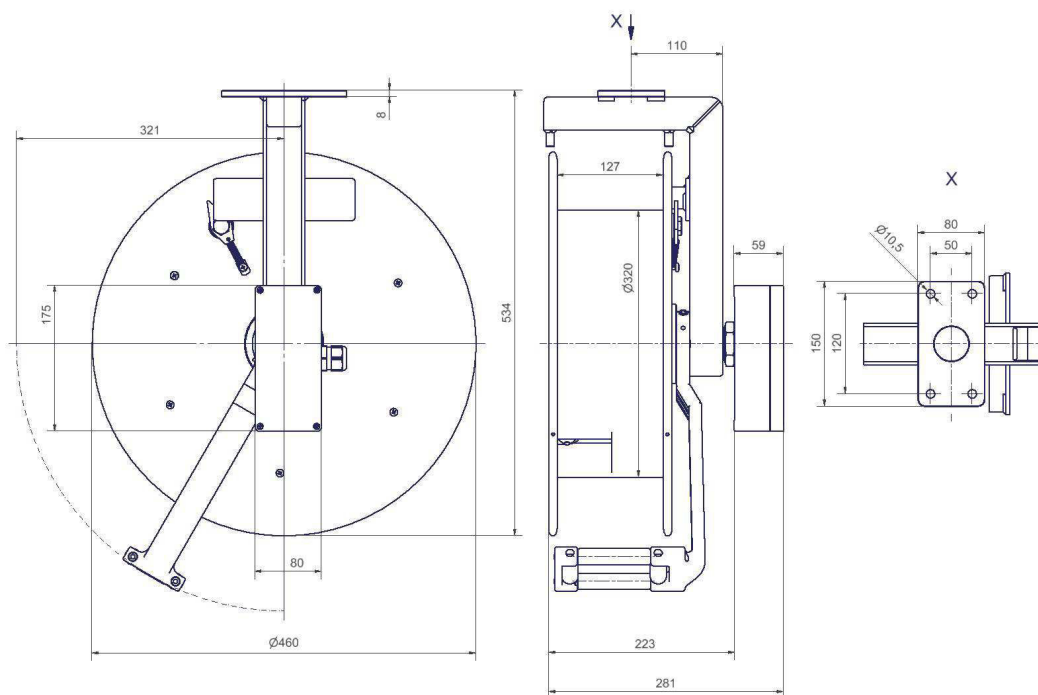


Ceiling and wall holder for FT 150 + FT 260

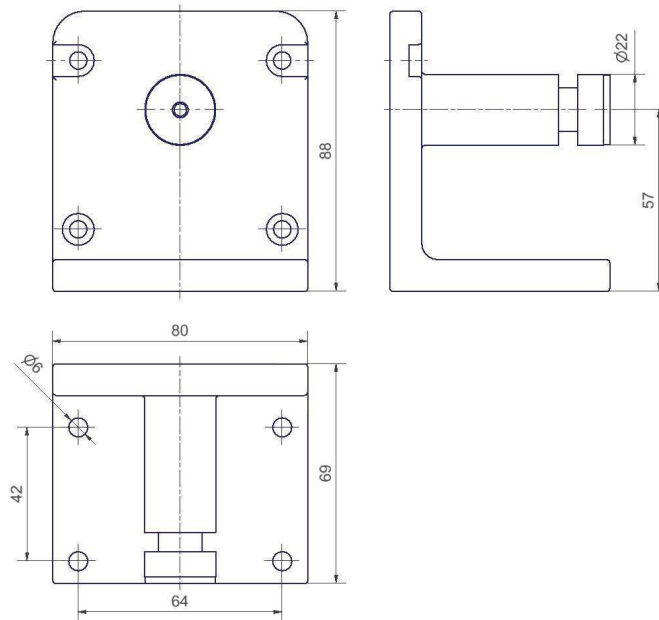


Ceiling holder for FT 350

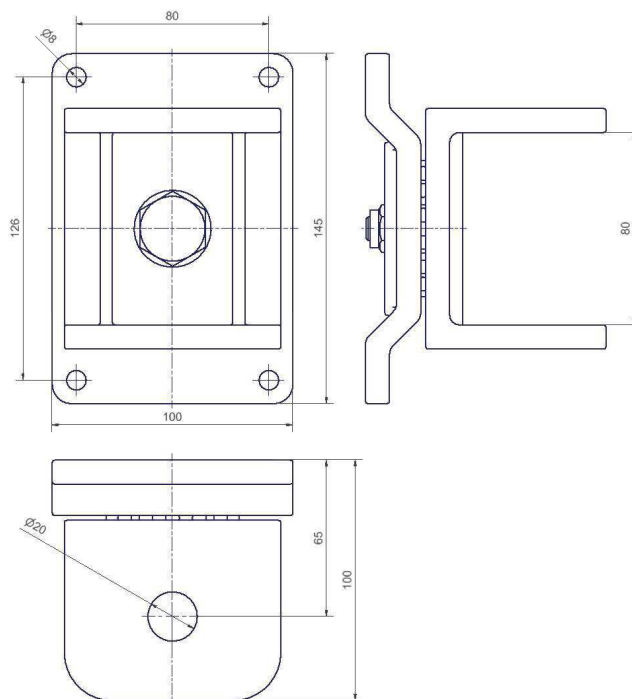


Ceiling holder for FT 038

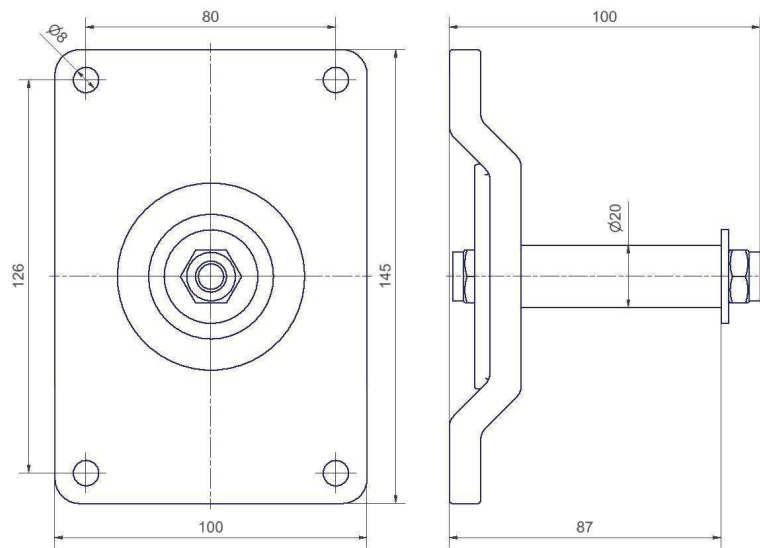


Ceiling holder for FT 046

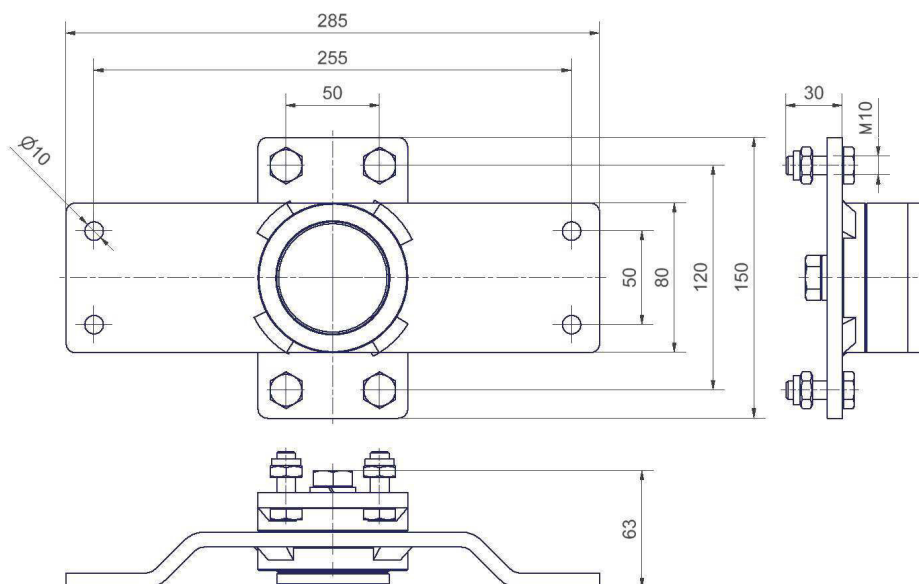


Wall holder for FT 350 + FT 038

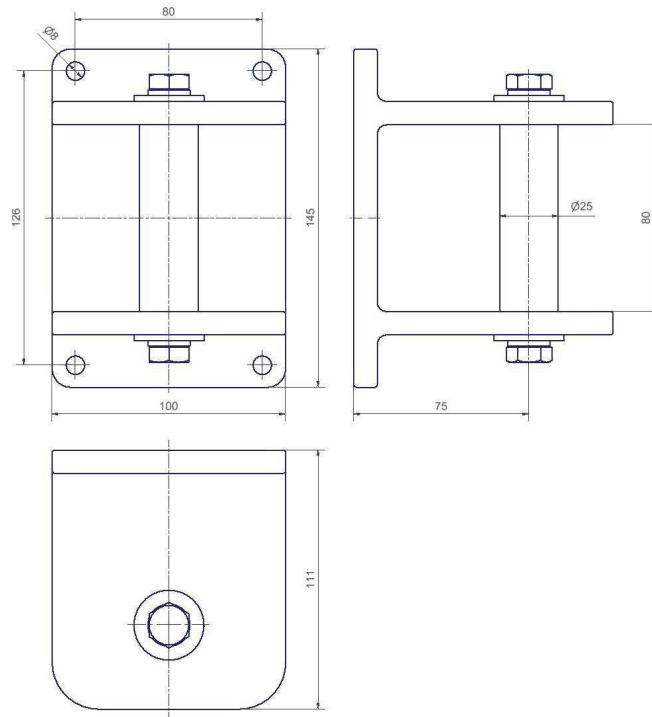


Wall holder for FT 046

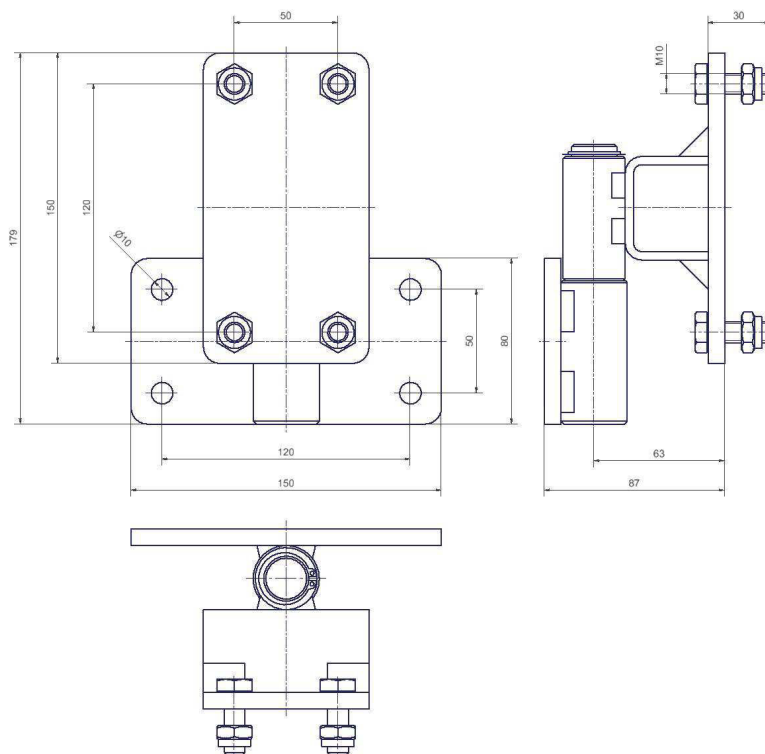


FT 150

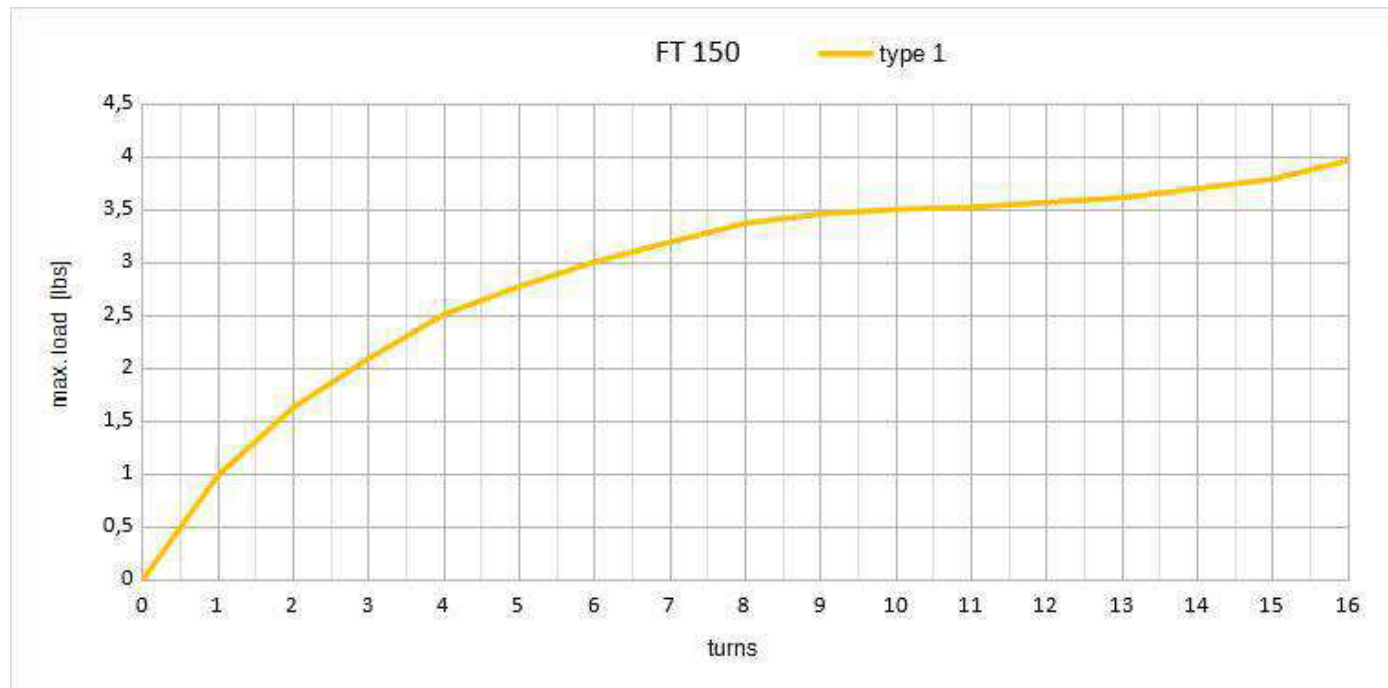


FT 260

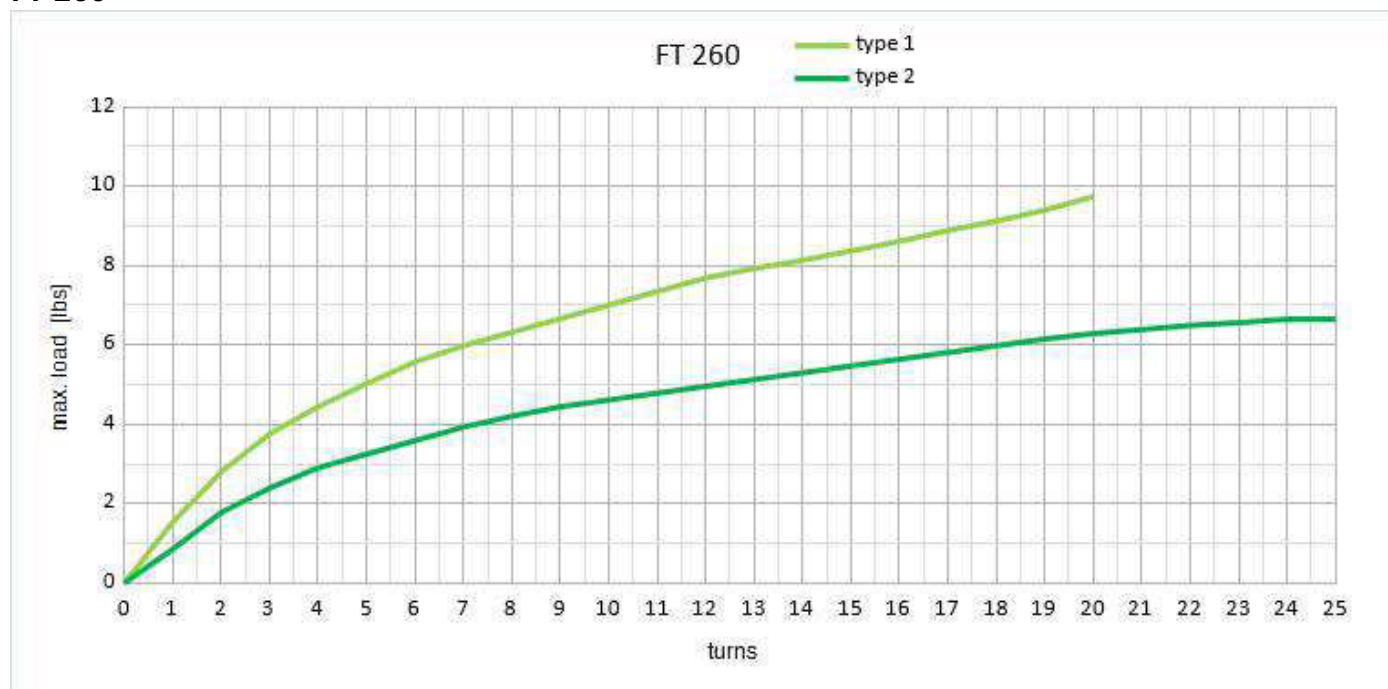


FT 350

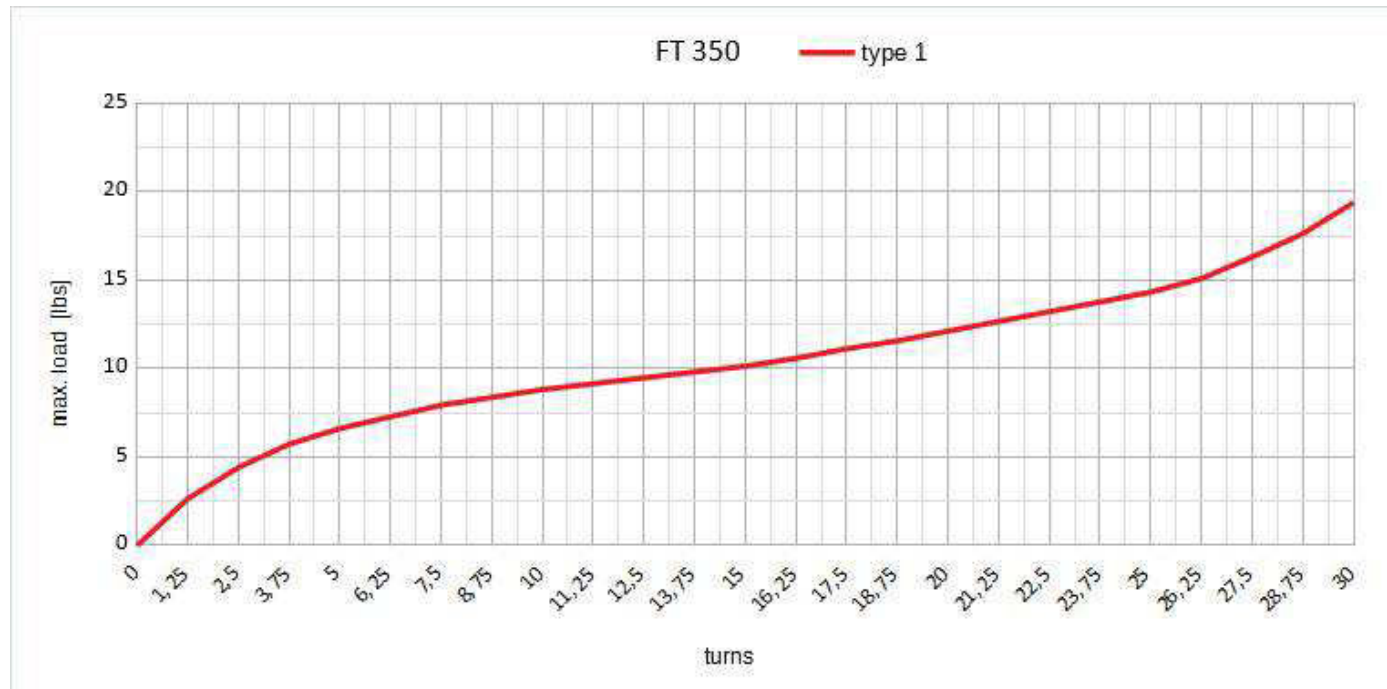

FT 038

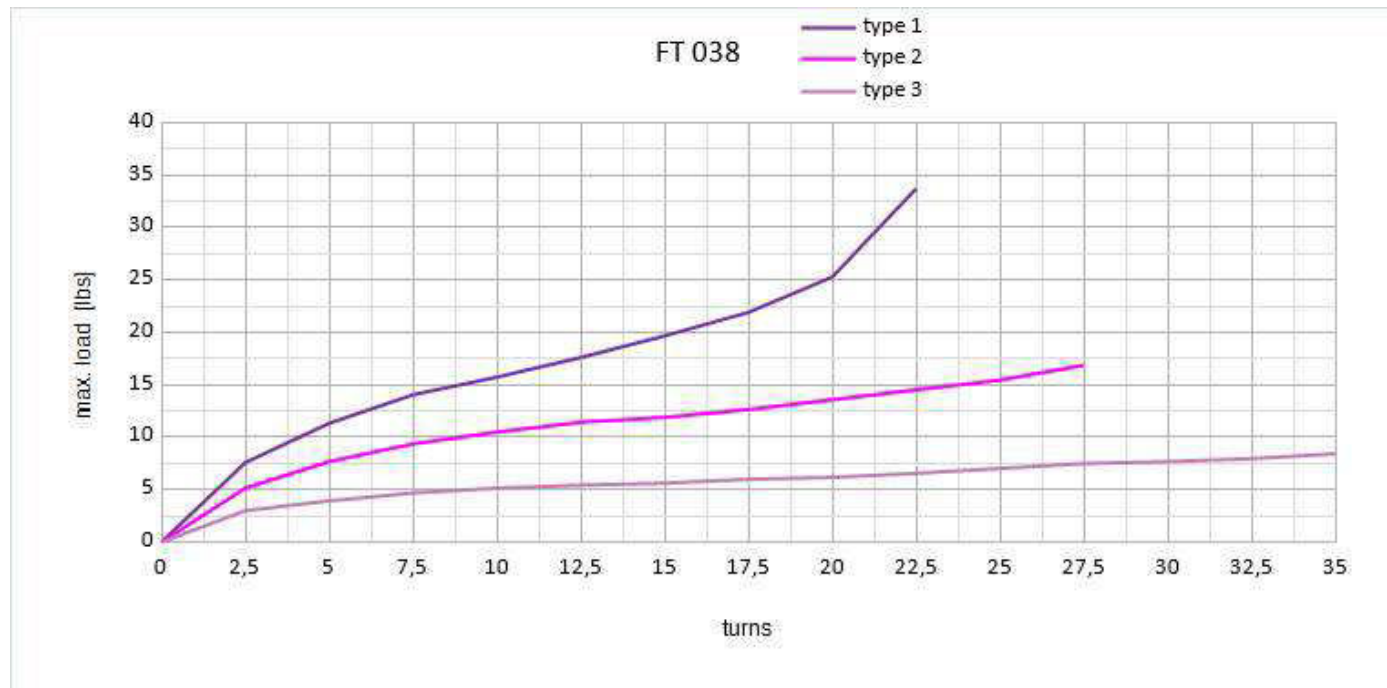

FT 046

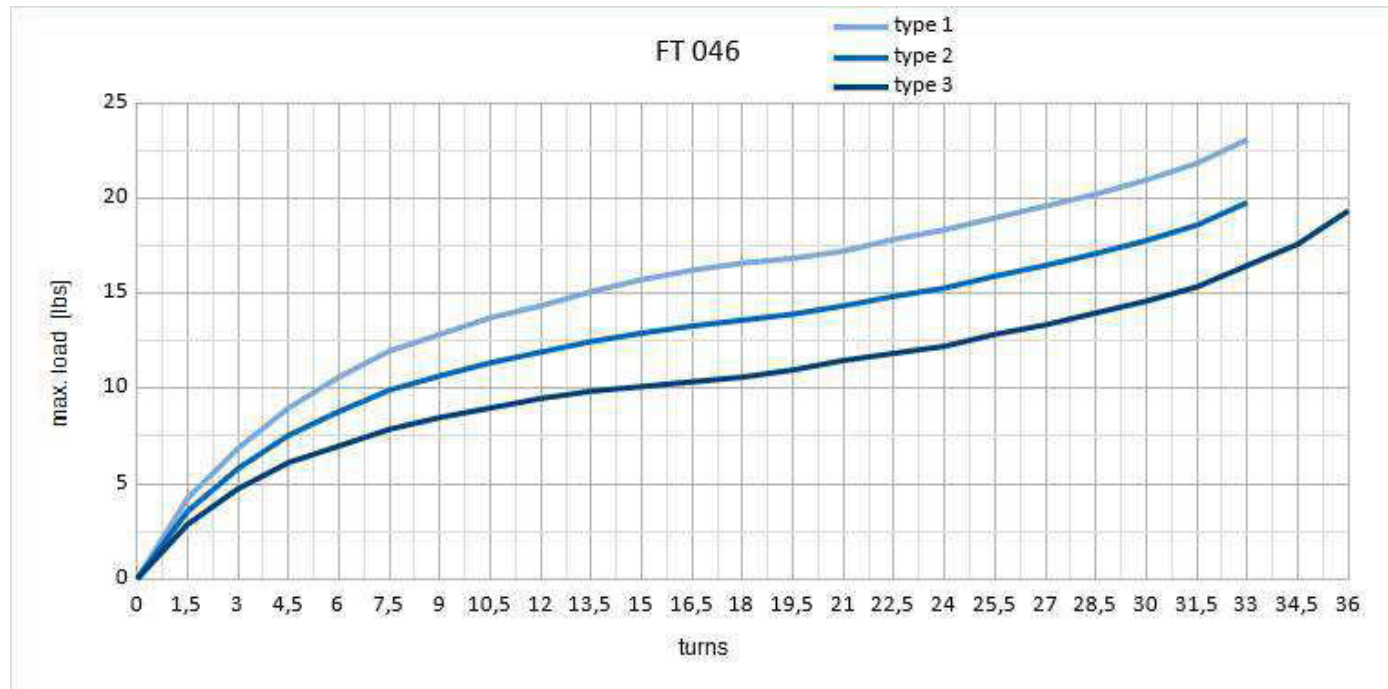

Worldwide

Audio/Video & Broadcast
The Resource Corporation Pty Ltd
Unit 15 / 173 - 181 Rooks Road Vermont
VIC 3133
AUSTRALIA
Phone: +61 (0) 3 9874 5988
E-Mail: sales@trc.com.au
www.trc.com.au

Trade & Industry
De Maegd NV Belgium
Ambachtenlaan 13
3001 Heverlee
BELGIUM
Phone: +32 (0) 16 400302
E-Mail: info@demaegd.be
www.demaegd.be

Trade & Industry
T.C.Hasemer PTY. LTD.
Unit 1, 16 Mavis Street
NSW 2212 Revesby
AUSTRALIA
Phone: +61 (0) 2 9771 9848
E-Mail: sales@hasemer.com.au

Audio/Video & Broadcast
Belram Luxemburg
Chaussee de Wavre, 1600
1160 Brussel
BELGIUM
Phone: +32 (0) 2 6729590
E-Mail: info@belram.com
www.belram.lu

Audio/Video & Broadcast
TONPLAN Goegele & Avedikian OG
Mozartstr. 14
6850 Dornbirn
AUSTRIA
Phone: +43 (0) 5572 200710
E-Mail: info@tonplan.com
www.tonplan.com

Audio/Video & Broadcast
Schill Kanada
4710 St Ambroise, Suite 234
Montreal, QC H4C 2C7
CANADA
Phone: +1 (0) 514-827 2979
E-Mail: info@schillreels.com
www.schillreels.com

Trade & Industry
Ing. E. Csernohorszky GmbH
Wallackgasse 4
1230 Wien
AUSTRIA
Phone: +43 (0) 1 69089-0
E-Mail: cserno@cserno.at
www.cserno.at

Trade & Industry
Hensel (Qingdao) Electrical Installation and Distribution Systems Co.Ltd
NO.8,Xinghai Road Huanhai Development Zone
Chengyang, Qingdao
China - 266108
CHINA
Phone: +86 (0) 532 81108656
E-Mail: info@hensel-electric.cn
www.hensel-electric.cn

Trade & Industry
Spiral Reihs & Co. KG
Erlachgasse 117
1100 Wien
AUSTRIA
Phone: +43 (0) 1 60108-0
E-Mail: zentrale@spiral.at
www.spiral.at

Trade & Industry
Munos spol. s.r.o
Zaspital 408
588 32 Brtnice
CZECH
Phone: +42 (0) 774 320 780
E-Mail: munos@munos.cz
www.munos.cz

Worldwide

Audio/Video & Broadcast

Kinovox Scandinavia

Marielundvej 45B
2730 Herlev

DENMARK

Phone: +45 (0) 70 22 38 11
E-Mail: info@kinovox.dk
www.kinovox.dk

Trade & Industry

Cablecaddy

Unit 11 Crystal Business Centre
Sandwich, Kent CT13 9QX

GREAT BRITAIN

Phone: +44 (0) 1304 612957
E-Mail: info@cablecaddy.co.uk
www.marcaddy.com

Trade & Industry

Nord Tech Industrisystemer

Lucernemarken 18 A
5260 Odense S

DENMARK

Phone: +45 (0) 65 91 98 02
E-Mail: post@nord-tech.dk
www.nord-tech.dk

Trade & Industry

Hensel Electric India Pvt.Ltd.

35 Kunnam Village
Sunguvarchathram - Walajabad Road
4th km behind Samsung / Flextronics
Sriperumbudur Taluk
Kanchipuram Dist. - 631 604
Tamil Nadu

INDIA

Phone: +91 (0) 44 3727 0202
E-Mail: info@hensel-electric.in
www.hensel.in

Audio/Video & Broadcast

Helipilt Ltd. Estonia

Tänassilma
Vetevana tee 6-3
76406 Harjumaa

ESTONIA

Phone: +372 (0) 56 220 102
E-Mail: helipilt@gmail.com
www.helipilt.ee

Trade & Industry

Reykjafell Ltd.

Skipholti 35
105 Reykjavik

ISLAND

Phone: +354 (0) 588 6000
E-Mail: reykjafell@reykjafell.is
www.reykjafell.de

Trade & Industry

Oy T. Stenbacka AB

Emalikatu 2 B
04440 Järvenpää

FINLAND

Phone: +358 (0) 207 432 320
E-Mail: info@stenbacka.fi
www.t-stenbacka.fi

Trade & Industry

Electrosen Ltd.

Manufacture & Marketing of Electrical Appliances
23, Hapalmach St.
Bnei-Brak 51118

ISRAEL

Phone: +972 (0) 3 618 41 31
E-Mail: info@electrosen.co.il
www.electrosen.co.il

Audio/Video & Broadcast

Sommer Cable France

115 Rue de la république
67720 Weyersheim

FRANCE

Phone: +33 (0) 388 51 87 34
E-Mail: france@sommercable.com
www.sommercable.fr

Audio/Video & Broadcast

Link srl

Via Bruno Pontecorvo 10
00012 Guidonia Montecelio (Rome)

ITALY

Phone: +39 (0) 06 227251
E-Mail: info@linkitaly.com
www.linkitaly.com



Worldwide

Audio/Video & Broadcast
TOMOCA Electronics Co., LTD
Radio-kaikan bild. 10F
1-15-16 Sotokanda Chiyoda-ku
101-0021 Tokyo
JAPAN
Phone: +81 (0) 3-3443-2633
E-Mail: sales@tomoca.co.jp
www.tomoca.co.jp

Audio/Video & Broadcast
TVC
Dvaro str. 140
Siauliai, LT-76199
LITHUANIA
Phone: +370 (0) 41 520 295
E-Mail: tvcl@tvc.lt
www.tvc.lt

Trade & Industry
Koopman B.V.
Molenvliet 2
3961 Wijk bij Duurstede
NETHERLANDS
Phone: +31 (0) 343 59 22 22
E-Mail: info@koopman.nu
www.koopman.nu

Audio/Video & Broadcast
Jorgen Holmefjord AS
Jernkroken 9
0976 Oslo
NORWAY
Phone: +47 (0) 22252999
E-Mail: post@holmefjord.no
www.holmefjord.no

Audio/Video & Broadcast
PTH "Neopta electronics" Sp.z.o.o.
ul. Pawla Włodkowica 14
60-334 Poznań
POLAND
Phone: +48 (0) 61 662 48 51
E-Mail: info@neopta.pl
www.neopta.pl

Audio/Video & Broadcast
Aplauz Sp. z.o.o. Poland
ul. Graniczna 19
05-092 Lomianki-Dąbrowa
POLAND
Phone: +48 (0) 22 751 42 39
E-Mail: aplauz@aplauzaudio.pl
www.aplauzaudio.pl

Trade & Industry
Sofema
Edifício 263, 1º Andar
Rue Maria Isabel Saint-Léger, No. 20
1300-442 Lisboa
PORTUGAL
Phone: +351 (0) 213 920 700
E-Mail: sofema@sofema.pt
www.sofema.pt

Audio/Video & Broadcast
First Cable
Sirenevyi Boulevard 3, Bld. 3
105122 Moscow
RUSSIA
Phone: +7 (0) 495 600 6868
E-Mail: info@1-cable.ru
www.1-cable.ru

Trade & Industry
SibWest
Ovrajnaja Str. 4-1
630049 Novosibirsk
RUSSIA
Phone: +7 (0) 383 21 95 200
E-Mail: nsk@sibwest.com
www.sibwest.com

Audio/Video & Broadcast
Masstron Co., Ltd
5th Lok Yang Road 14
629763 Singapore
SINGAPORE
Phone: +65 (0) 6763 0309
E-Mail: sales@masstron.com
www.masstron.com



Worldwide

Audio/Video & Broadcast
Hannyang Broadcomms
 305 Ho,A-dong, Hangang Xi Tower, 401
 Yangcheon-gu
 Seoul
SOUTH KOREA
 Phone: +82 (0) 2 2602 1581/1585
 E-Mail: sales@hannyang.com
 www.hannyang.com

Audio/Video & Broadcast
Percon S.L.
 Diputació 203
 08011 Barcelona
SPAIN
 Phone: +34 (0) 93 451 78 30
 E-Mail: central@percon.es
 www.percon.es

Trade & Industry
Coma S.A. Spain
 Narcis Monturiol, no. 35
 Poligon Industrial SudOest
 08028 Sant Just Desvern (Barcelona)
SPAIN
 Phone: +34 (0) 93 490 31 51
 E-Mail: coma@eecom.com
 www.eecom.com

Trade & Industry
Cabletronic Sweden
 Västberga Alle 32
 12630 Hägersten
SWEDEN
 Phone: +46 (0) 8 447 43 50
 E-Mail: epost@cabletronic.se
 www.cabletronic.se

Trade & Industry
Demelectric AG Schweiz
 Steinhaldenstrasse 26
 8954 Geroldswil
SWISS
 Phone: +41 (0) 43 455 44 00
 E-Mail: info@demelectric.ch
 www.demelectric.ch

Audio/Video & Broadcast
Masstron (Thailand) Co., Ltd
 1213/334 Soi Ladprao 94 (Panjamit),
 Ladprao Road, Kwang Plabpla, Khet Wang
 Thonglang,
 Bangkok, 10310
THAILAND
 Phone: +66 (0) 2319-9375-6
 E-Mail: sales@masstron.com
 www.masstron.com

Audio/Video & Broadcast
Engineer-Service Ltd Ukraine
 15 Vavulyovkh str.
 Kiev, 04060
UKRAINE
 Phone: +38 (0) 44 593 18 20
 E-Mail: info@iservice.kiev.ua
 www.serv.com.ua

Audio/Video & Broadcast
CableTech
 Warehouse No. 7 – Plot No. 598-1212
UNITED ARAB EMIRATES
 Phone: +971 (0) 4 8852895
 E-Mail: info@cabletechmea.com
 www.cabletechmea.com

Trade & Industry
Hensel Electric U.A.E.
 PO Box 514456
 Sharjah Airport International Free Zone (SAIF Zone)
 Block Q4-Street - Q4-57
 Sharjah
UNITED ARAB EMIRATES
 Phone: +971 (0) 6 5747547
 E-Mail: info@hensel-electric.ae
 www.hensel-electric.ae

Audio/Video & Broadcast
Schill USA
 7044 Winding Trail
 Brighton, MI 48116
USA
 Phone: +1 (0) 517 404 3746
 E-Mail: info@schillreels.com
 www.schillreels.com

Follow us on

@schillkabeltrommeln




schilltrommeln



Schill Kabeltrommeln



schill_gmbh



@schill_gmbh





sales@schill.de
www.schill.de