



# **CLAMPS & HOOKS** TUBE DIAMETER 20 MM

# Halfcoupler Small max. 10 kg (20 mm)



#### **Technical Data**

For tube diameter:	20 mm
Tensile load:	up to 10 kg
Maximum shearing load:	2 kg

#### **Product description**

• Halfcoupler for Naxpro FD 14 truss system and Junior-Truss

Halfcoupler Silver Product No.: 400200963
Halfcoupler Black Product No.: 400200964

# Halfcoupler Small Silver with Eyelet max. 10 kg (20 mm)



#### **Technical Data**

For tube diameter:	20 mm
Tensile load:	up to 10 kg
Maximum shearing load:	2 kg

#### **Product description**

• Halfcoupler incl. Eyelet C15E for the Naxpro FD 14 trussing system and Junior-Truss

Halfcoupler Silver with Eyelet Product No.: 400201316






# TUBE DIAMETER 32 - 35 MM CLAMPS & HOOKS

## Halfcoupler Small max. 75 kg (32 - 35 mm)



# Technical Data



#### **Product description**

 Incl. device screw M10 and Lock screw M8, retaining ring, grommet and wing nut

Halfcoupler Silver Product No.: 400200960
Halfcoupler Silver, stainless steel Product No.: 400200968
Halfcoupler Black Product No.: 400200970

# Swivel Coupler Slim max. 50 kg (32 - 35 mm)



#### **Technical Data**

For tube diameter:	32 - 35 mm
Tensile load:	up to 50 kg
Maximum shearing load:	30 kg
Dimensions without device screw:	93 x 30 x 80 mm
Weight:	0,35 kg
Material:	Aluminium 6061 T6

#### **Product description**

 Lock screw M8 zinc coated with grommet and wing nut Linked with screw M8

Swivel Coupler Silver Product No.: 400200975
Swivel Coupler Black Product No.: 400200976

# Halfcoupler Small with Eyelet max. 75 kg (32 - 35 mm)



#### **Technical Data**

For tube diameter:	32 - 35 mm
Tensile load:	up to 75 kg
Maximum shearing load:	30 kg
Clamp width:	30 mm
Weight:	0,35 kg
Material:	Aluminium 6061 T6

#### **Product description**

- Incl. M10 ring eye C15E coated
- Lock screw M8 wing nut

Halfcoupler Silver Product No.: 400200965
Halfcoupler Black Product No.: 400200966

# **CLAMPS & HOOKS** TUBE DIAMETER 32 - 35 MM

# Halfcoupler with Glass Holder max. 20 kg (32 - 35 mm)



#### **Technical Data**

For tube diameter:	32 - 35 mm	
Max. load:	20 kg	
Maximum shearing load:	: 20 kg	
Material:	Aluminium 6061 T6	

#### **Product description**

- Incl. device screw M10 zinc coated, retaining ring, grommet and wing nut
- · Lock screw M8 zinc coated with grommet and wing nut

Halfcoupler with Glass Holder for 6-10 mm Product No.: 400202235
Halfcoupler with Glass Holder for 10-16 mm Product No.: 400202240

#### Glass Holder 6 - 10 mm / 10 - 16 mm with M10 thread



#### **Product description**

- Plate holder suitable for panel thicknesses from 6 - 10 mm or 10 - 16 mm
- With M10 thread for universal fastenings

Glass Holder for 6-10 mm Product No.: 400201300
Glass Holder for 10-16 mm Product No.: 400201305





# TUBE DIAMETER 32 - 35 MM CLAMPS & HOOKS

# Smart Hook Slim Clamp Mini max. 75 kg (32 - 35 mm)



#### **Technical Data**

#### **Product description**

• Incl. retaining ring, grommet and wing nut

Smart Hook Clamp Mini Silver Product No.: 400200961
Smart Hook Clamp Mini Black Product No.: 400200971

# Selflock Hook Mini max. 75 kg (32 - 35 mm)



#### **Technical Data**

For tube diameter:	32 - 35 mm
Tensile load:	up to 75 kg
Weight:	0,21 kg

#### **Product description**

• Incl. wing nut, circlip and washer

Selflock Hook Mini Silver Product No.: 400200962
Selflock Hook Mini Black Product No.: 400200972

## **Butterfly Nut in different thread sizes**



# **Product description**

- · Spare wing nut with M8 or M12 thread
- In silver or black

Butterfly Nut Silver M8 Product No.: 400200096
Butterfly Nut Black M8 Product No.: 400200097
Butterfly Nut Silver M12 Product No.: 400200098
Butterfly Nut Black M12 Product No.: 400200099

# Halfcoupler Small max. 100 kg (48 - 51 mm)





#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 100 kg
Maximum shearing load:	30 kg
Weight:	0,145 kg
Material:	Aluminium 6061 T6

#### **Product description**

• Incl. device screw M10 and Lock screw M8, retaining ring, grommet and wing nut

Halfcoupler Silver	Product No.: 400200000
Halfcoupler Silver, stainless steel	Product No.: 400200002
Halfcoupler Black	Product No.: 400200055

# Halfcoupler Slim max. 200 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 200 kg
Maximum shearing load:	40 kg
Weight:	0,35 kg
Material:	Aluminium 6061 T6

#### **Product description**

• Incl. device screw M10 and lock screw M12, retaining ring, grommet and wing nut

Halfcoupler Silver	Product No.: 400200005
Halfcoupler Silver, stainless steel	Product No.: 400200007
Halfcoupler Black	Product No.: 400200060

# Halfcoupler Heavy max. 500 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 500 kg
Maximum shearing load:	100 kg
Weight:	0,517 kg
Material:	Aluminium 6061 T6

#### **Product description**

- Incl. device screw M10 zinc coated, retaining ring, grommet and wing nut
- Lock screw M12 zinc coated with retaining ring, grommet and wing nut

Halfcoupler Silver	Product No.: 400200010
Halfcoupler Black	Product No.: 400200065



# TUBE DIAMETER 48 - 60 MM **CLAMPS & HOOKS**

# Halfcoupler Heavy max. 750 kg (48 - 51 mm)



#### **Technical Data**

1 T6

#### **Product description**

 Incl. device screw M12 and lock screw M12, retaining ring, grommet and wing nut

Halfcoupler Silver	Product No.: 400200035
Halfcoupler Silver, stainless steel	Product No.: 400200038
Halfcoupler Black	Product No.: 400200068

# Halfcoupler Heavy max. 750 kg (60 mm)



#### **Technical Data**

For tube diameter:	60 mm
Tensile load:	up to 750 kg
Maximum shearing load:	100 kg
Weight:	0,73 kg
Material:	Aluminium 6061 T6

#### **Product description**

- Incl. device screw M12 black, retaining ring, grommet and wing nut
- · Lock screw M8 zinc coated with grommet and wing nut

Halfcoupler Silver Product No.: 400200036
Halfcoupler Black Product No.: 400200069

## Swivel Coupler Light max. 100 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 100 kg
Maximum shearing load:	30 kg
Weight:	0,216 kg
Material:	Aluminium 6061 T6

#### **Product description**

- 360° turnable, linked with screw M8
- Lock screw M8 zinc coated with grommet and wing nut

Swivel Coupler Silver Product No.: 400200040
Swivel Coupler Black Product No.: 400200042

# **CLAMPS & HOOKS** TUBE DIAMETER 48 - 51 MM

# Swivel Coupler Small max. 200 kg (48 - 51 mm)



# Technical Data

For tube diameter:	48 - 51 mm
Tensile load:	up to 200 kg
Maximum shearing load:	40 kg
Weight:	0,70 kg
Material:	Aluminium 6061 T6

#### **Product description**

- 360° turnable, linked with bolt
- Lock screw M12 zinc coated with grommet and wing nut

Swivel Coupler Silver Product No.: 400200045
Swivel Coupler Black Product No.: 400200075

## Swivel Coupler Heavy max. 500 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 500 kg
Maximum shearing load:	60 kg
Weight:	1,0 kg
Material:	Aluminium 6061 T6

#### **Product description**

- 360° turnable, linked with bolt
- Lock screw M12 zinc coated with retaining ring, grommet and wing nut

Swivel Coupler Silver Product No.: 400200050
Swivel Coupler Black Product No.: 400200080

## Swivel Coupler Heavy fixable max. 500 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 500 kg
Maximum shearing load:	60 kg
Weight:	1,0 kg
Material:	Aluminium 6061 T6

#### **Product description**

- To fix it in 90°, 360° turnable, linked with bolt
- Screw plug M12 galvanized with circlip, washer and wing nut

Swivel Coupler Silver Product No.: 400200051
Swivel Coupler Black Product No.: 400200081



# TUBE DIAMETER 48 - 51 MM CLAMPS & HOOKS

### Halfcoupler Small with Eyelet max. 170 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 170 kg
Maximum shearing load:	40 kg
Weight:	0,35 kg
Material:	Aluminium 6061 T6

#### **Product description**

- Incl. device screw M10 black coated and M10 ring eye C15E coated
- Lock screw M12 zinc coated with retaining ring, grommet and wing nut

Halfcoupler Silver Product No.: 400200085
Halfcoupler Black Product No.: 400200086

# Halfcoupler "Side-Entry" max. 300 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 300 kg
Weight:	0,397 kg
Material:	Aluminium 6061 T6

#### **Product description**

Lock screw M12 zinc coated with grommet and wing nut

Halfcoupler Silver Product No.: 400200025
Halfcoupler Black Product No.: 400200067

## Halfcoupler "Side-Entry" with half cone max. 300 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 300 kg
Weight:	0,397 kg
Material:	Aluminium 6061 T6

#### **Product description**

- Incl. device screw M10 black, retaining ring and half cone connector (excluding bolt and spigot)
- Lock screw M12 zinc coated with grommet and wing nut
- For FD31 HD44

Halfcoupler Silver Product No.: 400200020
Halfcoupler Black Product No.: 400200066

# Halfcoupler Small with Eyelet max. 100 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 100 kg
Maximum shearing load:	30 kg
Weight:	0,5 kg
Material:	Aluminium 6061 T6

#### **Product description**

- M10 eyelet C15E galvanized
- Screw plug M8 wing nut

Halfcoupler Silver Product No.: 400200001
Halfcoupler Black Product No.: 400200056

# Halfcoupler with Glass Holder max. 20 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Max. load:	20 kg
Maximum shearing load:	20 kg
Weight:	0,145 kg
Material:	Aluminium 6061 T6

#### **Product description**

- Incl. device screw M10 zinc coated, retaining ring, grommet and wing put
- · Lock screw M8 zinc coated with grommet and wing nut

Halfcoupler with Glass Holder for 6-10 mm Product No.: 400201301
Halfcoupler with Glass Holder for 10-16 mm Product No.: 400201306

#### Glass Holder 6 - 10 mm / 10 - 16 mm with M10 thread



#### **Product description**

- Plate holder suitable for panel thicknesses from 6 - 10 mm or 10 - 16 mm
- With M10 thread for universal fastenings

Glass Holder for 6-10 mm Product No.: 400201300
Glass Holder for 10-16 mm Product No.: 400201305



# TUBE DIAMETER 48 - 51 MM **CLAMPS & HOOKS**

# Selflock Easy Hook max. 250 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 250 kg
Weight:	0,48 kg

#### **Product description**

- Incl. device screw M10
- · Quick and easy attachment

Selflock Hook Silver Product No.: 400200032
Selflock Hook Black Product No.: 400200072

# Trigger Clamp max. 250 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 250 kg
Maximum shearing load:	50 kg
Weight:	0,482 kg
Material:	Aluminium 6061 T6

#### **Product description**

- Incl. device screw M10 zinc coated, retaining ring, grommet and wing nut
- Lock screw M12 zinc coated with grommet and wing nut

Trigger Clamp Silver Product No.: 400200030
Trigger Clamp Black Product No.: 400200070



# Smart Hook Slim Clamp max. 200 kg (48 - 51 mm)





#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	200 kg
Weight:	0,60 kg
Material:	Aluminium 6061 T6

#### **Product description**

• Incl. device screw M10

Smart Hook Slim Silver Product No.: 400200031
Smart Hook Slim Black Product No.: 400200071

# Claw Clamp 35/50 mm



#### **Product description**

Claw Clamp 35/50 mm:

• For aluminum tubes, For pipe joints, for example, as a support tube

Claw Clamp 35 mm for 35 x 2 mm Tube Product No.: 400200980
Claw Clamp 50 mm for 50 x 2 mm Tube Product No.: 400200987
Claw Clamp 50 mm for 50 x 3 mm Tube Product No.: 400200988
Claw Clamp 50 mm for 50 x 4 mm Tube Product No.: 400200989

# Half Clamp for Corner Bracing Sleeve (48 - 51 mm)



# **Product description**

Half Clamp for Corner Bracing Sleeve 50 mm:

- For aluminum pipes with a pipe diameter of approx. 50 x 4 mm
- · For bracing angles

Half Clamp for Corner Bracing Sleeve Product No.: 400200012



# TUBE DIAMETER 48 - 51 MM **CLAMPS & HOOKS**

## Halfcoupler for Eutrac 3-phase busbar with clip (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Load capacity:	15 kg
Width:	30 mm

#### **Product description**

• Lock screw M8 zinc coated with grommet and wing nut

Halfcoupler Eutrac 3-phase busbar with clip Product No.: 400201115

# **Butterfly Nut in different thread sizes**



#### **Product description**

- Spare wing nut with M8 or M12 thread
- In silver or black

Butterfly Nut Silver M8 Product No.: 400200096
Butterfly Nut Black M8 Product No.: 400200097
Butterfly Nut Silver M12 Product No.: 400200098
Butterfly Nut Black M12 Product No.: 400200099

# TV spigot



### **Product description**

- Diameter: 28 mm
- For M10 or M12 Tripods
- Incl. screw and shim
- Aluminum

TV Spigot M10 Tripods Product No.: 400200094
TV Spigot M12 Tripods Product No.: 400200095

# Hanging Point for 222 mm Trusses max. 75 kg (32 - 35 mm)



#### **Technical Data**

For tube diameter:	32 -35 mm
Tensile load:	up to 75 kg
Weight:	0,54 kg
Material:	Aluminum

#### **Product description**

- For safe and correct suspension from traverses
- For traverses with a diameter of about 32-35 mm
- Suitable for use on people
- Loadable up to 75 kg
- Statically checked
- For use in exhibition stand construction, retail, event technology

Product No.: 400200685

## Hanging Point for 290 mm Trusses max. 170 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Shear load max.:	up to 170 kg
Weight:	1,4 kg
Material:	Steel

#### **Product description**

- For safe and compliant suspension of trusses
- For traverses with a pipe diameter of ca. 48 51 mm
- Suitable for operation over people

Hanging Point Silver Product No.: 400201100
Hanging Point Black Product No.: 400201101

## Heavy Duty Hanging Point for 290 mm Trusses max. 750 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Maximum shearing load:	750 kg
Weight:	2,7 kg
Material:	Steel / Aluminum

#### **Product description**

- For safe and correct suspension of trusses
- For traverses with a pipe diameter of approx. 48 51 mm
- Suitable for operation over persons

**Product No.: 400201105** 



# TUBE DIAMETER 32 - 51 MM CLAMPS & HOOKS

# Heavy Duty Hanging Point for 400 mm Trusses max. 750 kg (48 - 51 mm)



#### **Technical Data**

For tube diameter:	48 - 51 mm
Maximum shearing load:	750 kg
Weight:	2,7 kg
Material:	Steel / Aluminum

#### **Product description**

- · For safe and correct suspension of trusses
- For traverses with a pipe diameter of approx. 48 51 mm
- Suitable for operation over persons

Product No.: 400201110

## Universal Projector Mount max. 13.5 kg (48 - 51 mm)




#### **Technical Data**

For tube diameter:	48 - 51 mm
Tensile load:	up to 13.5 kg
Weight:	1,2 kg
Material:	Aluminum

#### **Product description**

- Compatible with all standard projectors manufacturers
- Wide range of accessories including Riggatec Halfcoupler,
- small silver (diameter 48-51mm)
- Rotates 360° + tilt adjustment
- Also suitable for sloping surfaces
- Max. loading capacity 13.50 kg
  - The illustrated Beamer is not included **Product No.: 608153380**

# LCD / PLASMA TRUSS MOUNT 37 - 65" max. 45 kg

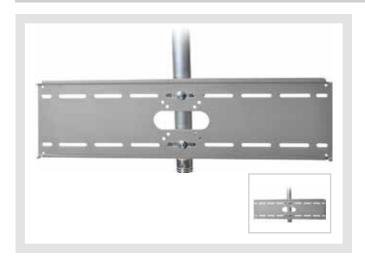

#### **Technical Data**

Tensile load:	up to 45 kg
Weight:	4,5 kg
Material:	Aluminium, steel

#### **Product description**

- Anti-theft protection
- Supports all VESA standards up to 700 x 400 mm
- Padlock not included
- Incl. Assembly instructions and mounting material
- Incl. 4 x Riggatec half clamp Halfcoupler small silver up to 100 kg

For tube diameter 32 - 35 mm Product No.: 608154490 For tube diameter 48 - 51 mm Product No.: 608154495



# STAGE EQUIPMENT FROM ADAM HALL

Adam Hall has been your specialist for professional stage equipment since 1975. Whether for use at open-air events, in theatres, studios, community and general-purpose halls, trade shows or in the gastronomy sector, we supply a comprehensive assortment of useful event equipment for any event and for a broad range of requirements.

Adam Hall Stage Equipment offers a huge selection of stage gauze, 19" equipment and stage systems. Attachment parts such as steps, handrails, side parts and wheelchair ramps offer additional configuration options. Duct tape, foam and stage molton, right up to measuring instruments, DEKRA-approved cable protection systems and BVGC 1 safeties complete the programme.

Adam Hall Stage Equipment means that you are perfectly equipped - with high availability from a single source in the reliable Adam Hall quality that naturally conforms to event equipment standards and regulations.

- STAGE ELEMENTS
- STAGE FABRICS
- SAFETIES
- ACCESSORIES

- DEFENDER
- POWER DISTRIBUTION
- TAPES
- 19" EQUIPMENT





**SOUND** TECHNOLOGY

STAGE HARDWARE FOR FLIGHTCASES

ADAM HALL GROUP BRANDS

















































adamhall.com

